


Capacitor, aluminum, 100 uF, +/-20% Tol, -40/+85C, 35 VDC@85C

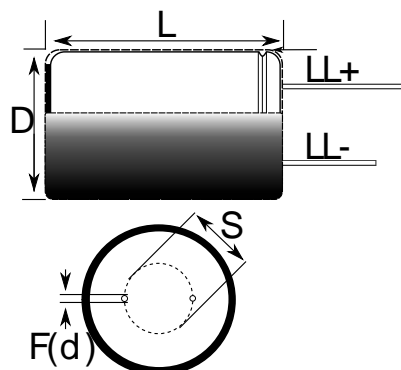

Note: '()' correspond to the letters used in the product bulletin

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	6.30	+/-0.5
L	11.00	+1.5/-0
S	2.50	+/-0.5
LLPos	20.00	MIN
LLNeg	15.00	MIN
F	0.50	NOM

Packaging Specifications	
Package Kind:	Bulk
Package Type:	Bag
Package Quantity:	10000

General Information	
Supplier:	KEMET
Application:	General Purpose
Part Type Description:	Single Ended Aluminum Electrolytic
Lead Type:	Straight
RoHS:	Yes

Specifications	
Capacitance:	100 uF
Voltage:	35 VDC
Tolerance:	+/-20%
Voltage:	44 V (Surge)
Life:	2000 Hrs
Rated Temperature:	85C
Temperature Range:	-40/+85C
Leakage Current:	35 uA
Leakage Condition:	2Min/20C
Dissipation Factor:	12%
Current/Ripple Current:	200 mA (120Hz 105C)