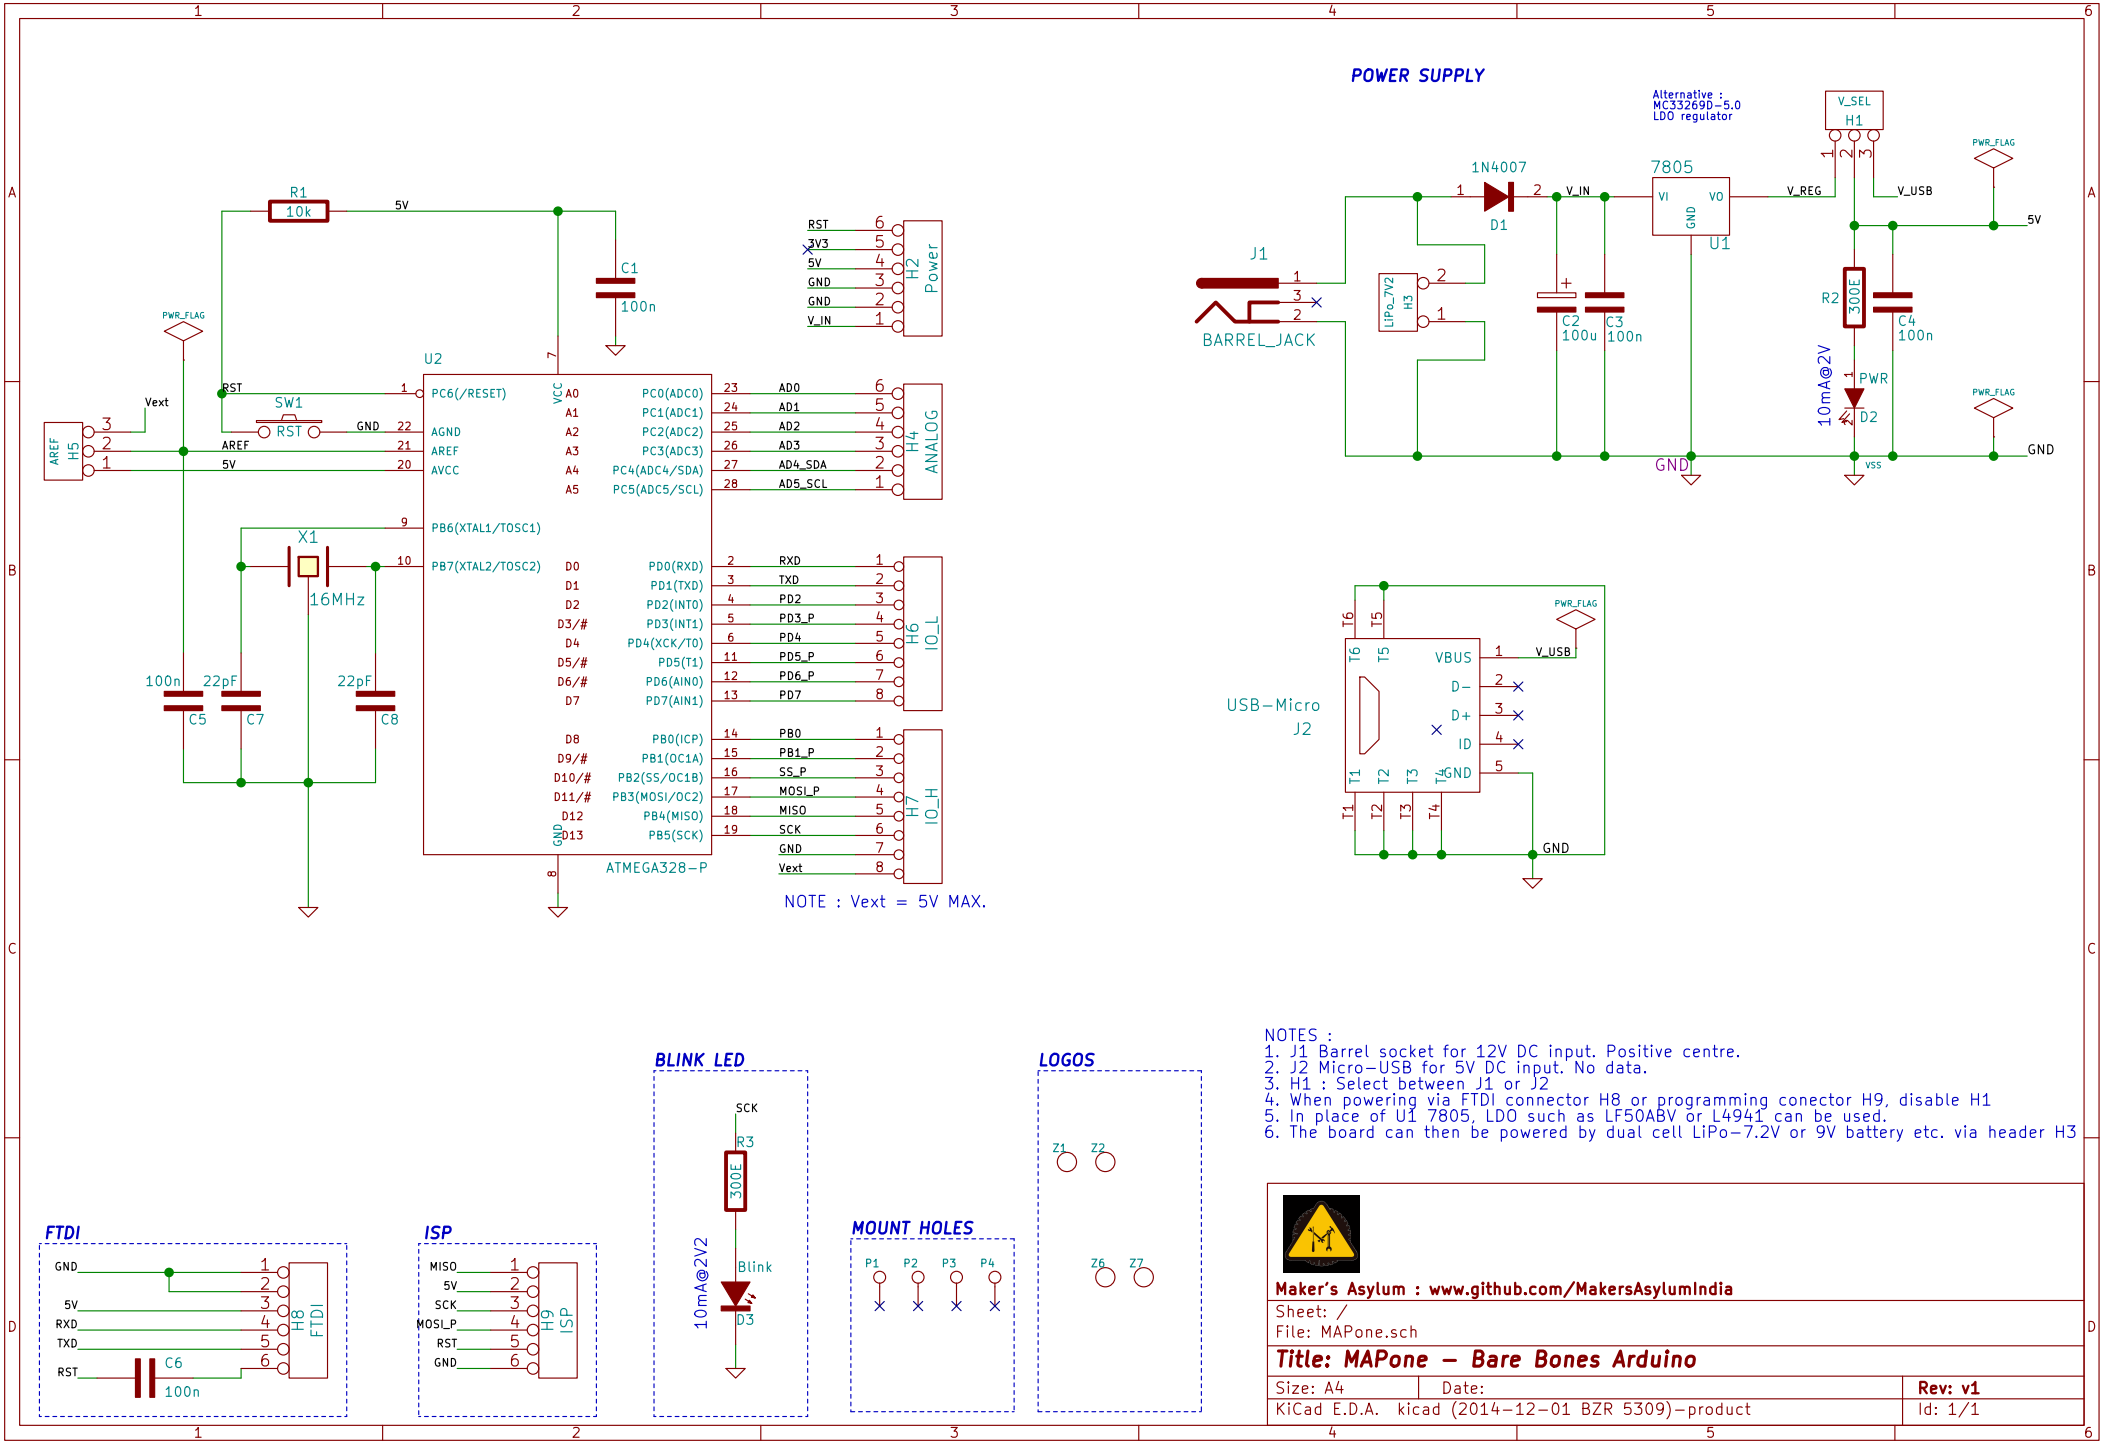

NOTES :
1. J1 Barrel socket for 12V DC input. Positive centre.
2. J2 Micro-USB for 5V DC input. No data.
3. H1 : Select between J1 or J2
4. When powering via FTDI connector H8 or programming conector H9, disable H1
5. In place of U1 7805, LDO such as LF50ABV or L4941 can be used.
6. The board can then be powered by dual cell LiPo-7.2V or 9V battery etc. via header H3

Maker's Asylum : www.github.com/MakersAsylumIndia

Sheet: /
File: MAPone.sch

Title: MAPone - Bare Bones Arduino

Size: A4	Date:	Rev: v1
KiCad E.D.A. kicad (2014-12-01 BZR 5309)-product		Id: 1/1