

<https://www.ti.com/product/TAS5825M>
<https://www.ti.com/tool/TAS5825MEVM>

Lower impedance speakers = more power = more current = more heat = more distortion

Apple uses: IR43xx MERUS™ MCM Class D amplifier IC

<https://www.mouser.com/datasheet/2/308/FPF1039-1300805.pdf>

<https://github.com/AIM65/NeatAMP-Test-Dev-software>

<https://store.sure-electronics.com/product/AA-JA32472v2>

Signal Level Sensor System look for it so you can reduce the bat consumption

CN1
B2B-XH-A (LF)(SN)

L+
L-

1
2



1
2


CN2
B2B-XH-A (LF)(SN)

R-
R+

1
2

1
2

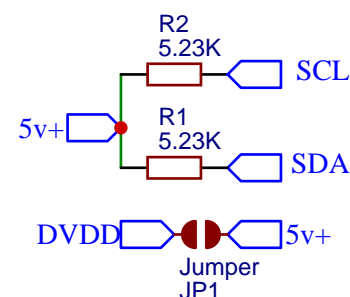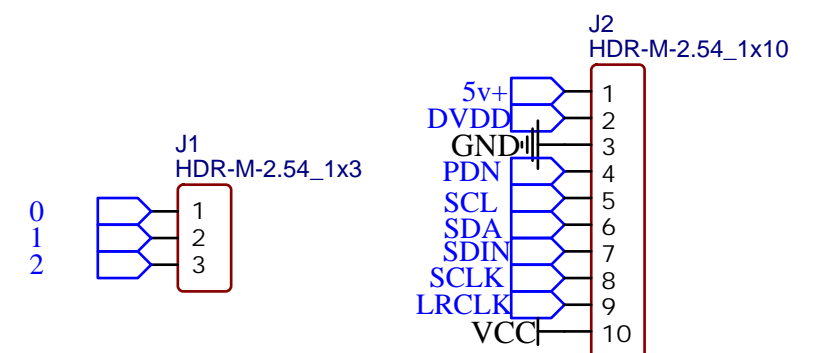

TITLE: AMP_TAS5825M		REV: 1.0
	Company: Mohammad Alabdulaziz	Sheet: 1/1
	Date: 2021-10-18 Drawn By: mfm1500	