



Development board version: FSC-DB102 V1.4
Module model: FCS-BT806


TRBI 200 Port

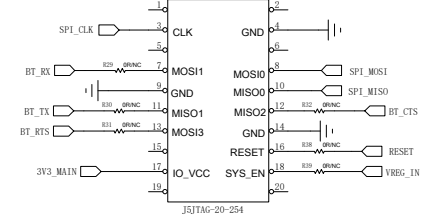


SPI Port




Short=SPI
Open=I2S



USB2.0 Port




Power

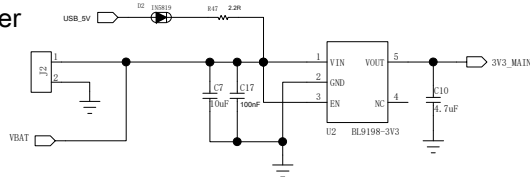


Button



POWER/PLAY/PAUSE

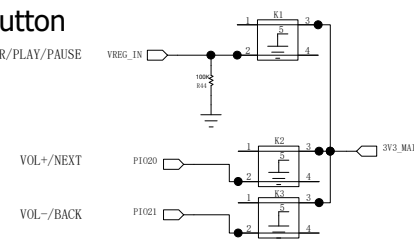


MIC

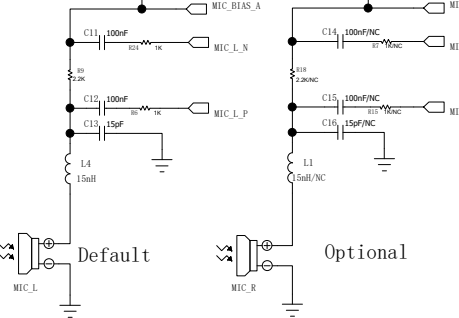


USB to UART

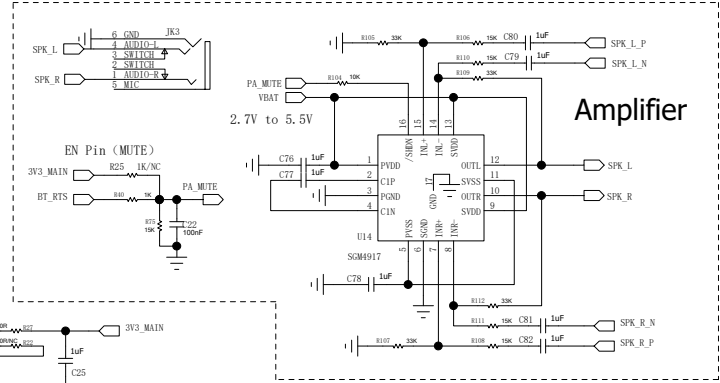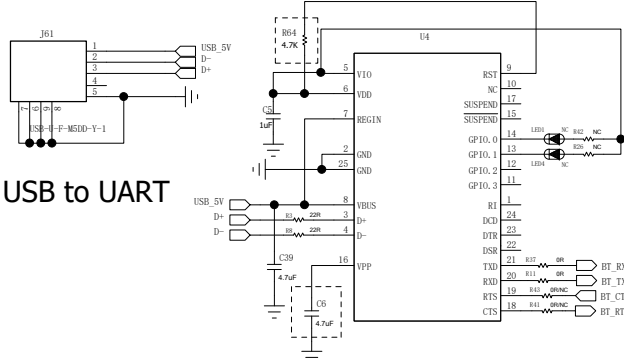


LED



RESET



Used to switch between LINE in and MIC

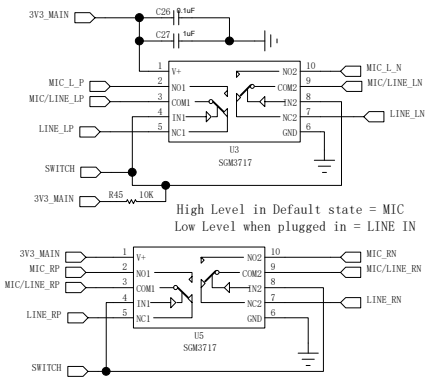

Line IN

