

2 INTRODUCTION

This chapter describes the special terminology used in this manual, installation specifications, configurations, and operation outlines.

2.1 Terminology

Some of the special terms used in this manual are explained below.

Table 2-1

Term	Definition
Product	The article which is being checkweighed.
Packer	The upstream equipment feeds product to the checkweigher.
Over	Measured weight of product that exceeds upper limit.
Under	Measured weight of product that is less than lower limit.
Proper	Measured weight of product that is within the range between upper and lower limit values.

2.2 Main Components

The name of each part and the function are described below.

* The figure below shows a checker with arm rejector (optional).

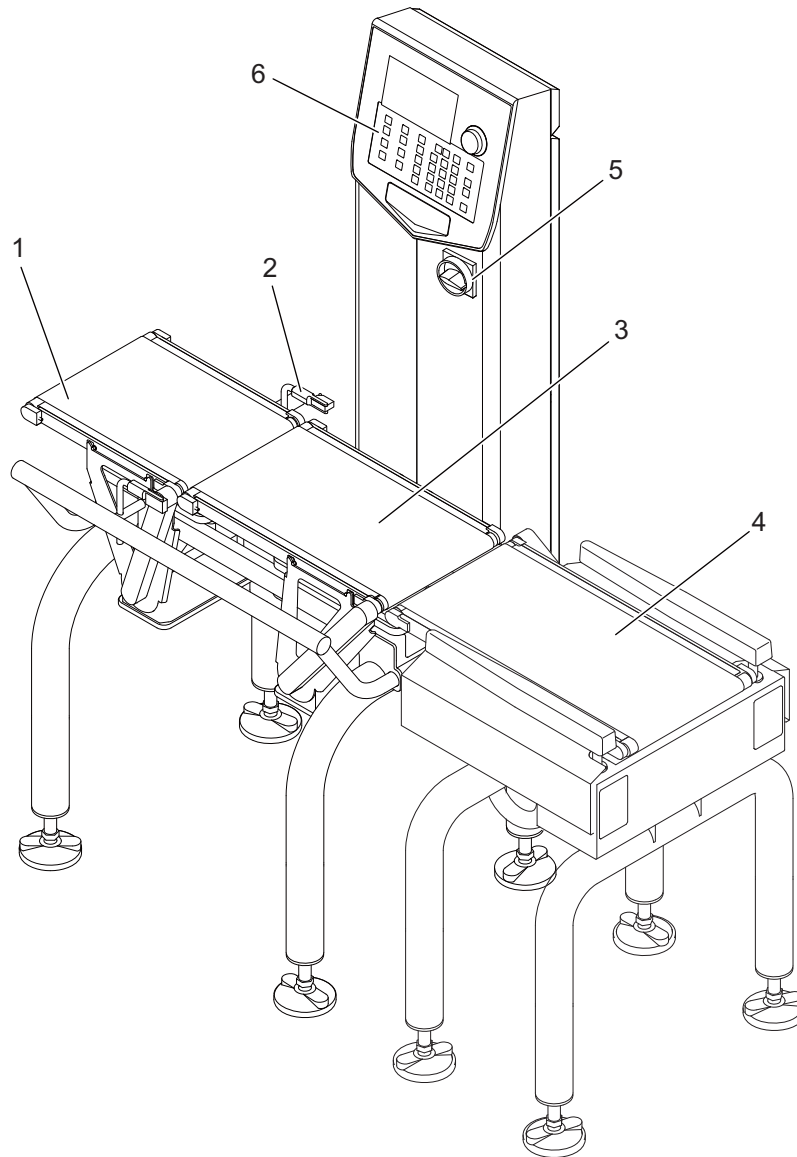


Fig. 2-1

Table 2-2

No.	Unit	Functional Description
1	Infeed Conveyor	Conveys the product to the weigh conveyor.
2	Photo Sensor	Detects that the product passed. 2 sets for the metal detector and weigher are equipped.
3	Weigh Conveyor	Weighs the product on the weigh conveyor. Do not overload or give a shock on it carelessly.

Table 2-2

No.	Unit	Functional Description
4	Rejector Device (option)	Diverts product based on weighing result.
5	Power Switch	Supplies/cuts power to the device.
6	Operation Panel	Used to set the operational condition and operate the device.

2.3 Operation Outline

This section describes the operation flow in which the product is infed to the infeed conveyor, weighed, and discharged.

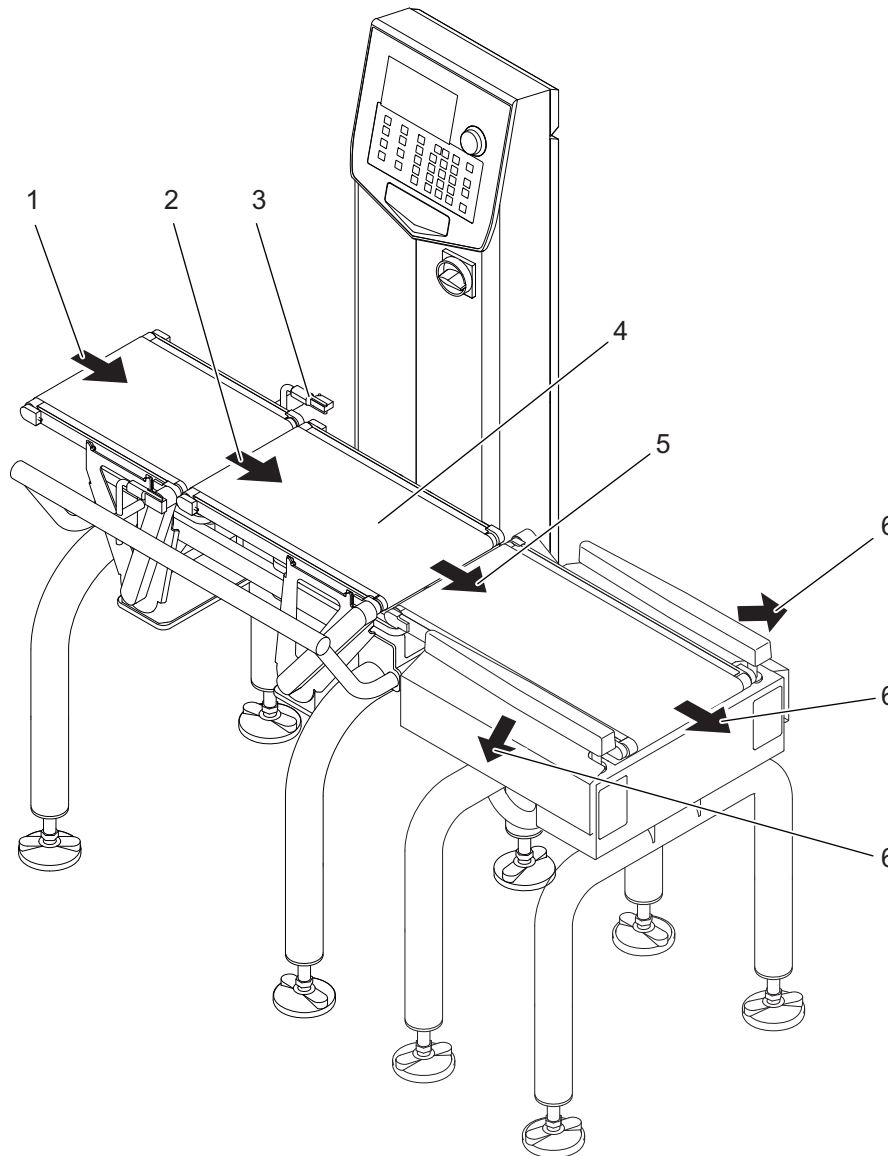


Fig. 2-2

1. Product is supplied from the upstream device such as a packer to the infeed conveyor.
2. Product is transferred from the infeed conveyor to the weigh conveyor.
3. Product on the weigh conveyor is detected by the photo switch.
4. Product is weighed on the weigh conveyor.
5. Product is discharged from the weigh conveyor.
6. When the optional rejector device is equipped, product may be diverted based on the weight and the metal detection results.