


Introduction

Eastey EC Series Variable Speed Conveyor Overview

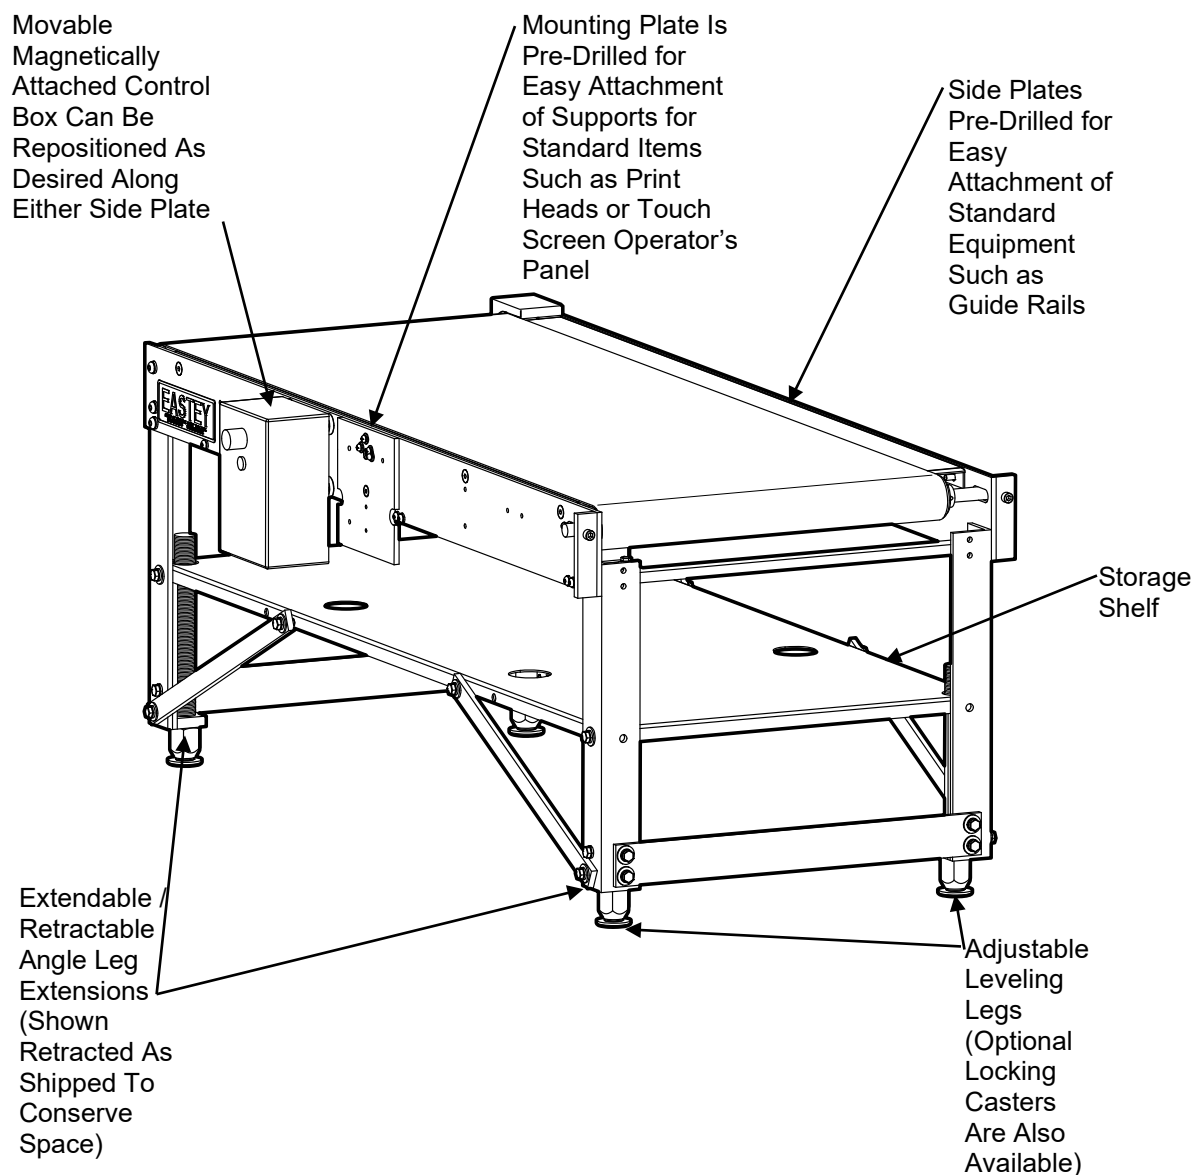

Note:

Conveyors are shipped collapsed to minimum height to conserve space during shipping. Conveyor legs are adjustable for height and leveling, and angle leg extension brackets are provided in legs at all four corners of the conveyor to provide stability at increased conveyor height.

Specifications

Model	Nominal Conveyor Size (width × length)	Width (A)	Height (B)	Length (C)
EC1248	12 in. × 48 in. 30.5 × 122 cm	20.2 in. 51.3 cm	See Table Below Based on Leg Length	48.9 in. 124.2 cm
EC1848	18 in. × 48 in. 45.7 × 122 cm	26.2 in. 66.5 cm	See Table Below Based on Leg Length	48.9 in. 124.2 cm
EC2472	24 in. × 72 in. 61 × 183 cm	32.2 in. 81.8 cm	See Table Below Based on Leg Length	72 in. 183 cm

Model	With 9" Leveling Legs	With 17" Leveling Legs	With 9" Leveling Legs and Locking Casters	With 17" Leveling Legs and Locking Casters
All Models	20 in. - 33.5 in. 50.8 cm – 85.1 cm	28 in. - 41.5 in. 71.1 cm – 105.4 cm	24 in. - 37.5 in. 61 cm – 95.3 cm	32 in. - 45.5 in. 81.2 cm – 115.6 cm

Explanation of Model Numbers

- E = Manufactured by Eastey Enterprises Inc., division of Engage Technologies.
- C = Conveyor. EC Series variable speed conveyor offer a reliable stand-alone product transport for primary or secondary product marking, and make a convenient add-on infeed or exit conveyor to existing case taping or shrink wrapping equipment.
- __ = 12, 18, or 24 — First two digits indicate the nominal width of the conveyor belt in inches: 12, 18, or 24-inch conveyor lengths are available.
- __ = 48 or 72 — Remaining two digits indicate the nominal total length of the conveyor in inches: 48 or 72-inch conveyor lengths are available.
- V0 = Voltage and Phase, 110V 5A single phase. All models are available configured for 110V 5A single phase. Only single phase is offered.

Conveyor Specifications

Machinery Makeup	Industrial strength ¼ inch thick steel, powder coated for durability.
Variable Speed	Up to 100 fpm.
Conveyor Height Adjustment	20 in. to 33.5 in. with 9-in. leg and without casters; 23 in. to 41.5 in. with 17-in. leg and without casters; 24 in. to 37.5 in. with 9-in. leg and with casters; 27 in. to 45.5 in. with 17-in. leg and with casters.
Electrical Requirements	110~115V 5A Single Phase.


Standard features

- Magnetic control box can be mounted on either side of conveyor to accommodate conveyor orientation and operator convenience.
- Pre-drilled mounting plate for printer brackets (one mounting plate is provided standard) makes for easy integration with ink jet printers and other equipment.
- Shelf included for storage of various items such as spare printheads, printer and LED control boxes, spare ink, and more.
- Small space saving footprint
- Seamless self-tracking belt
- ¼ inch cold rolled steel
- Variable speed drive
- Optional guide rails available
- Safety cover over pinch points
- Adjustable conveyor height
- Smooth, consistent belt speed


Eastey Conveyor Optional Accessories

Additional Print Head Mounting Plate	Predrilled to mount full family of Squid Ink Printing Systems.
Guide Rails	Single or dual optional heavy-duty side rails are available for box or primary product guidance to align product for consistent print (sold separately per side).
17-Inch Threaded Rod Legs	For up to 8" additional adjustable conveyor height if required.
Casters	Lockable casters for easy movement throughout the plant.


With Leveling Feet (Standard)

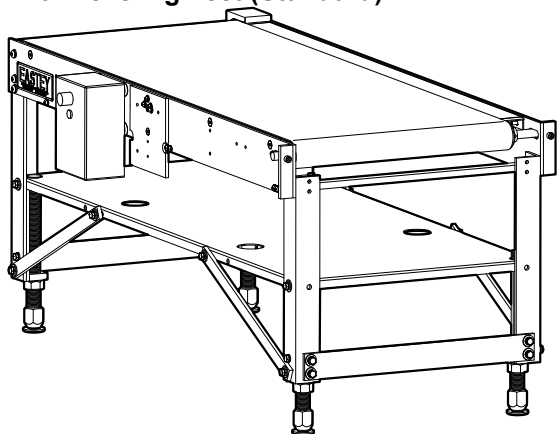


With Optional Locking Casters

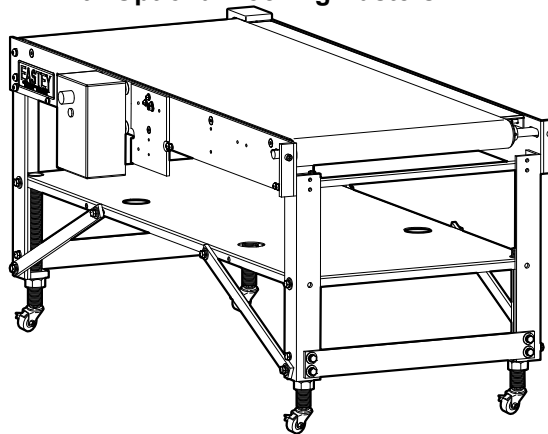


Dimensions

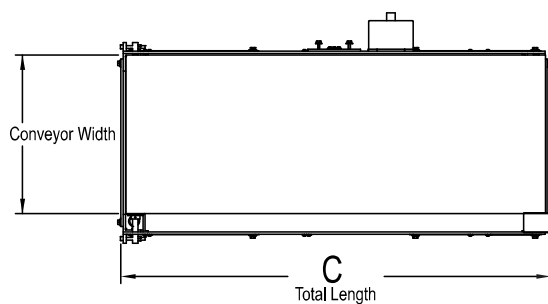


Overall Height with C0000503, 9-inch Length Leg Leveler Kit (4 Legs & Leveling Feet)

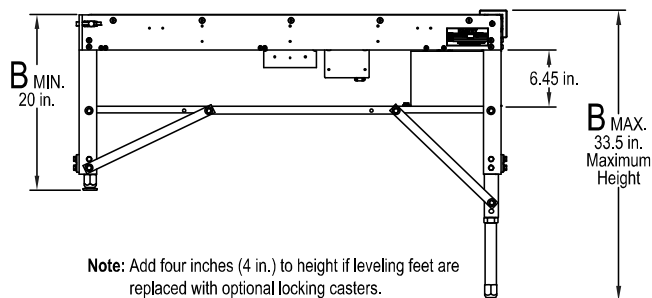

Note: Add four inches (4 in.) to height if leveling feet are replaced with optional locking casters.

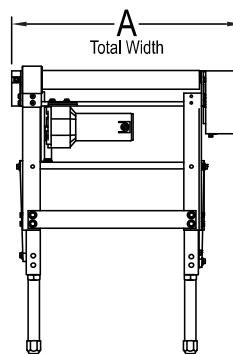

Overall Height with C0000504, 17-inch Length Leg Leveler Kit (4 Legs & Leveling Feet)

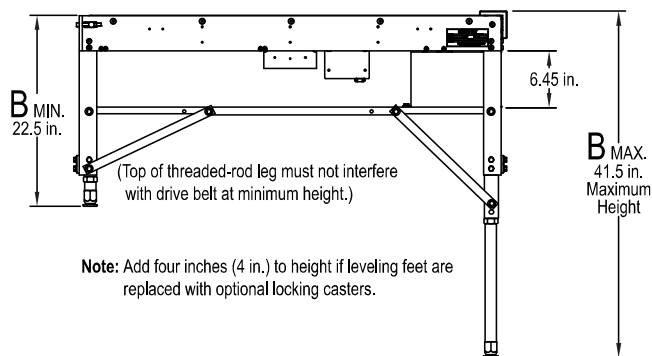

Note: Add four inches (4 in.) to height if leveling feet are replaced with optional locking casters.

