

110 VAC 1 PH COLLATOR WITH HMI

BPA SCHEMATIC BUILD CONTENTS	
SHEET #	
00	DRAWING INDEX AND PROJECT TITLE
01	SYSTEM LAYOUT
02	PANEL LAYOUT
03	3 PHASE POWER DISTRIBUTION
04	BLANK
05	VFD X 2
06	VFD X 1
07 - 13	BLANK
14	24VDC DISTRIBUTION
15	BLANK
16	SAFETY CIRCUIT
17 - 27	BLANK
28	PLC INPUTS
29 - 34	BLANK
35	PLC OUTPUTS
36 - 51	BLANK
52	ETHERNET NETWORK
53 - 54	BLANK
55	TORQUE SPECIFICATIONS

PLC PROGRAM NAME
HMI PROGRAM NAME

01
01

02
02

02
03

02
04

02
05

02
06

02
07

02
08

02
09

02
10

02
11

02
12

02
13

02
14

02
15


02
16

02
17



02
18


02
19

02
20

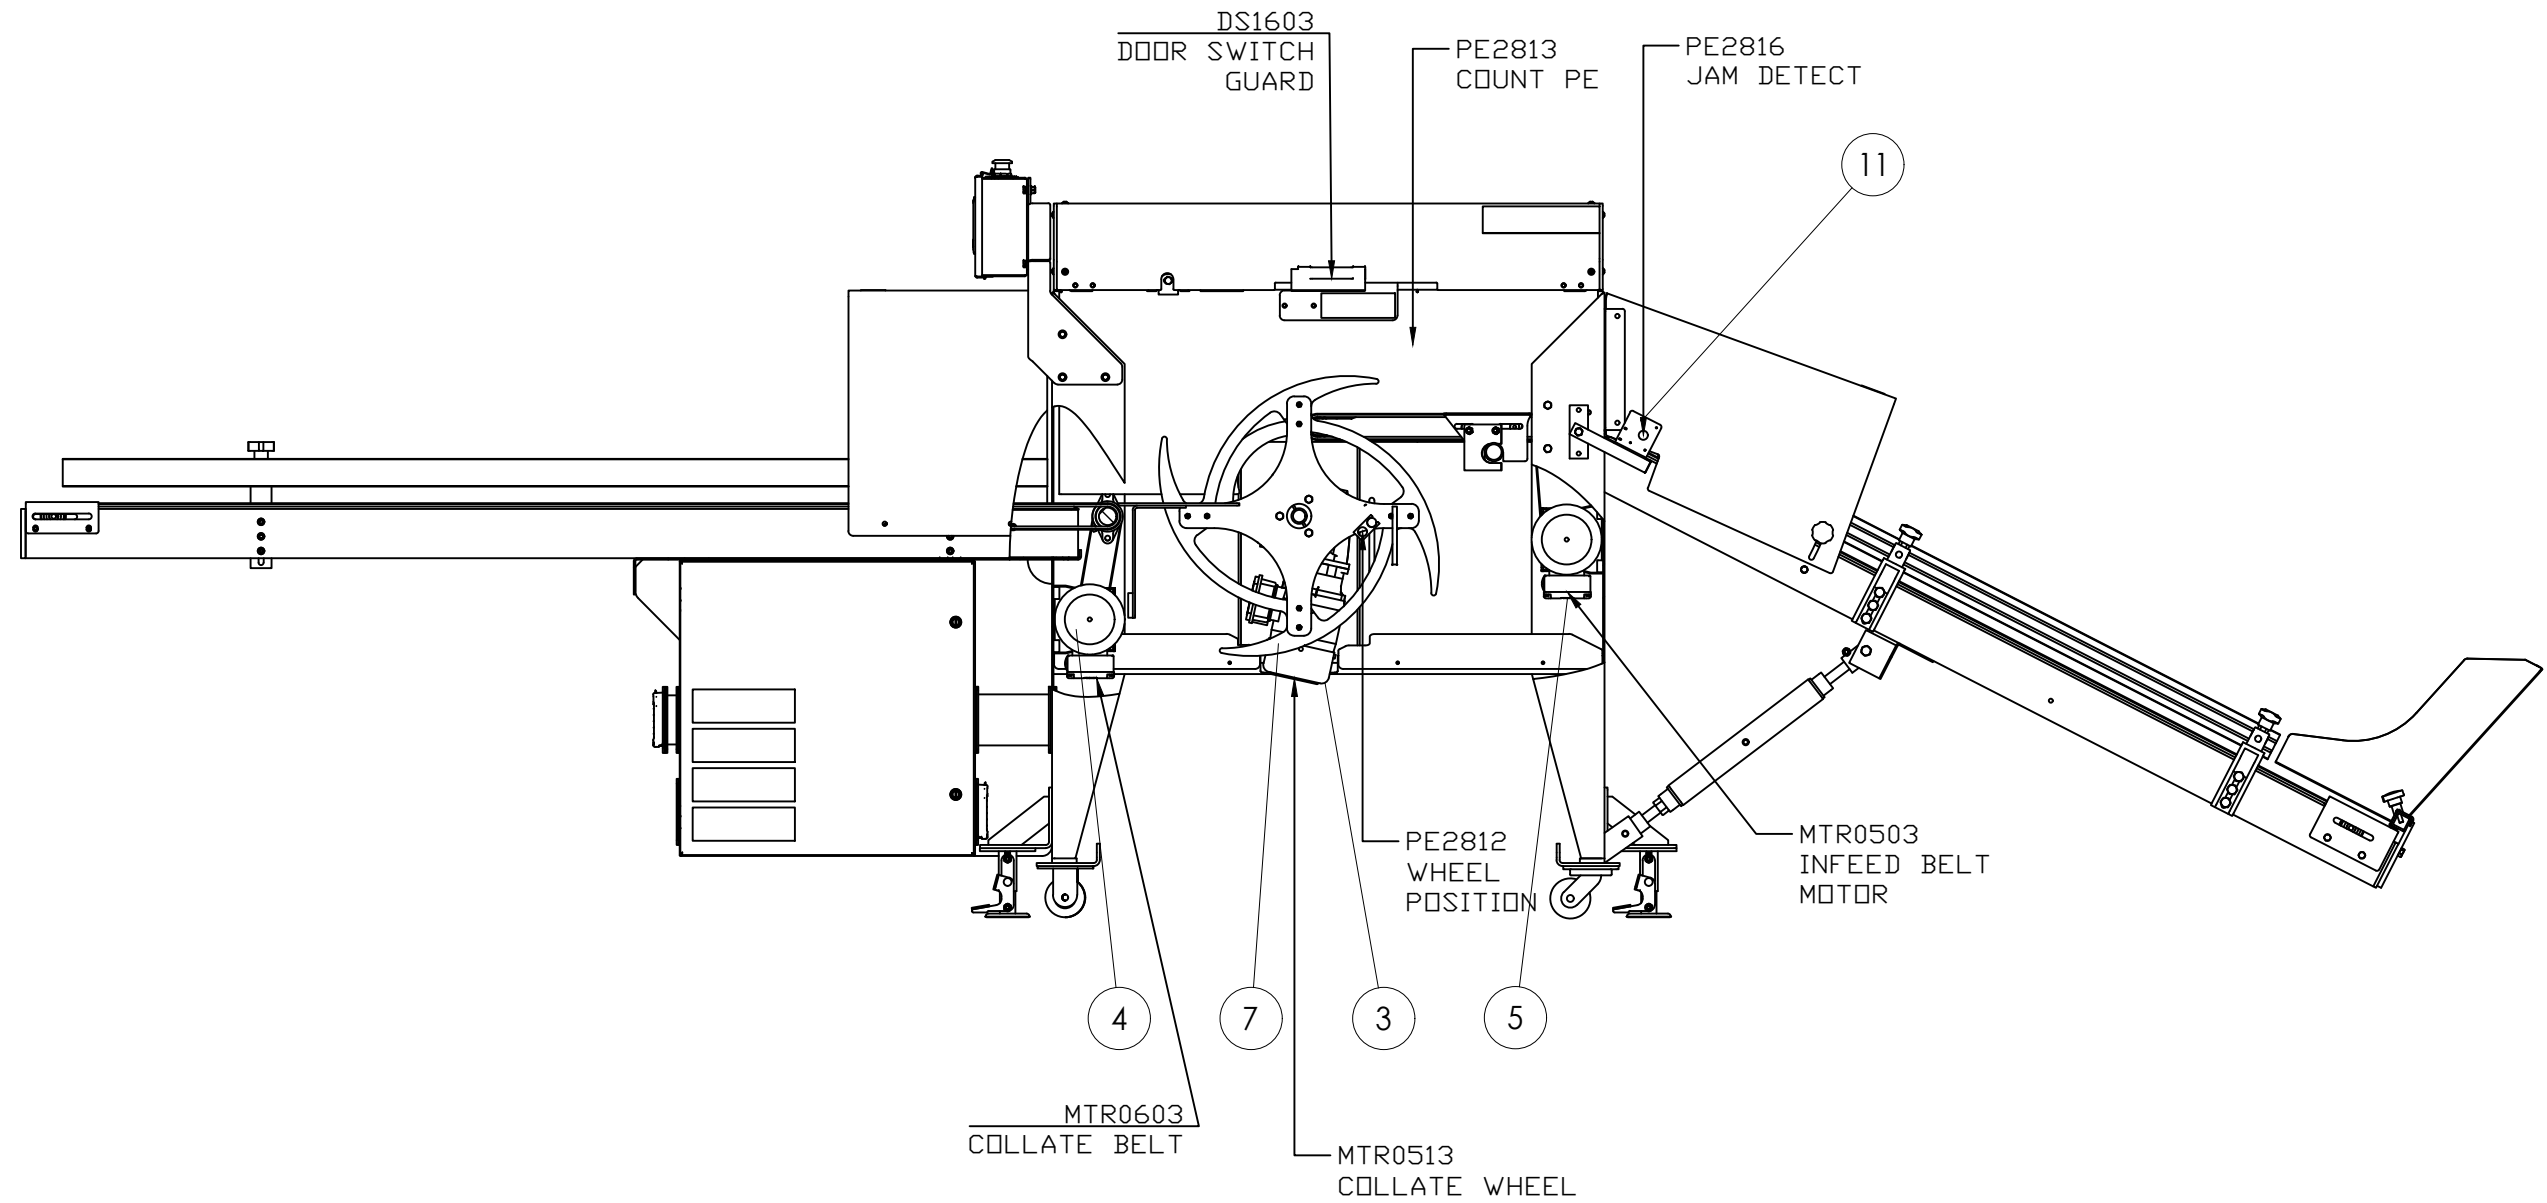

HOFFMAN 24X24

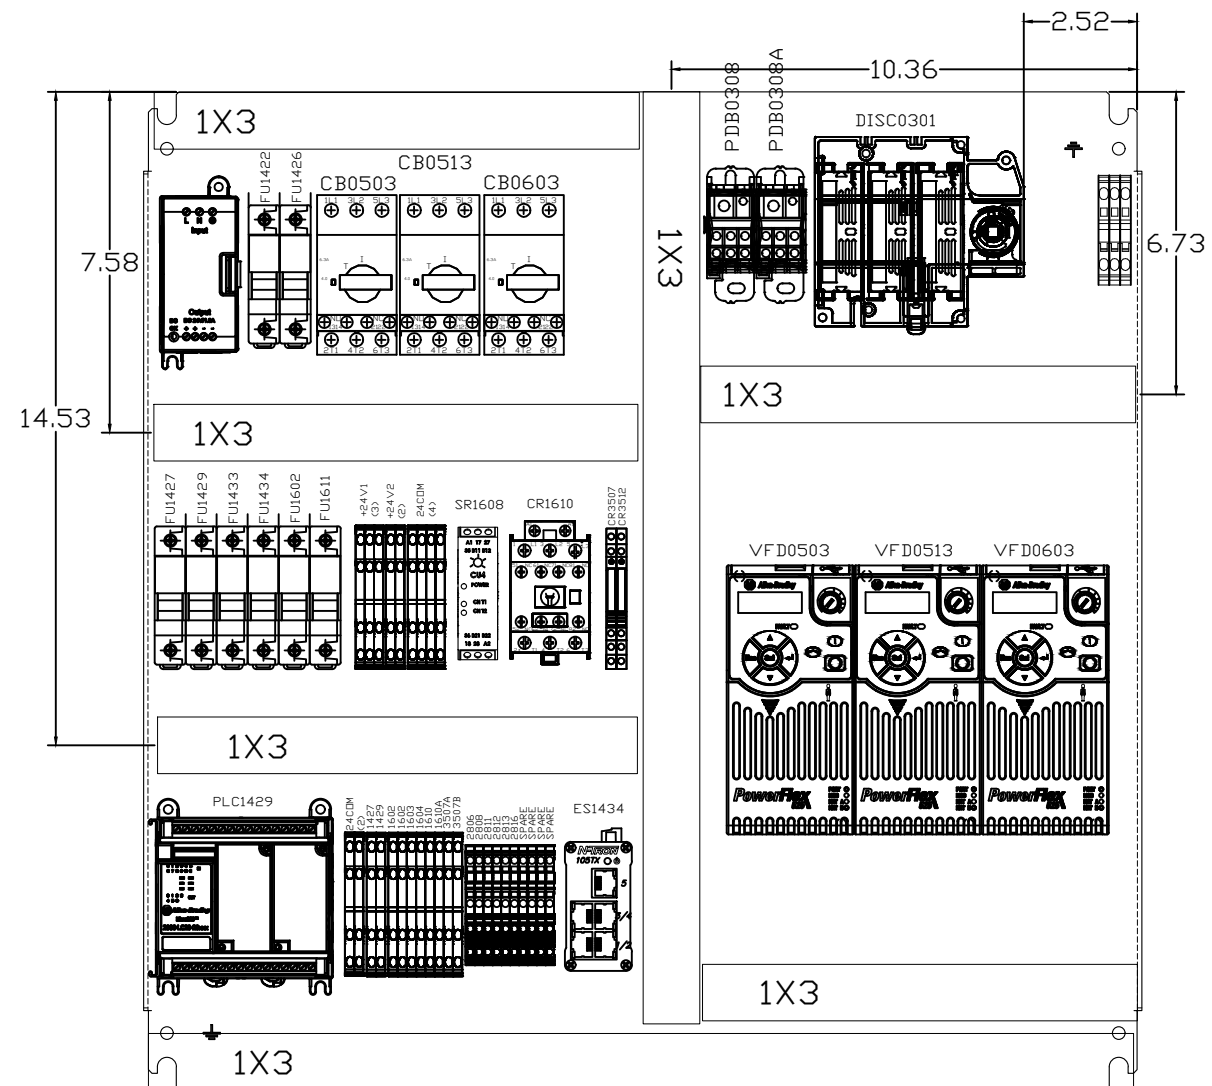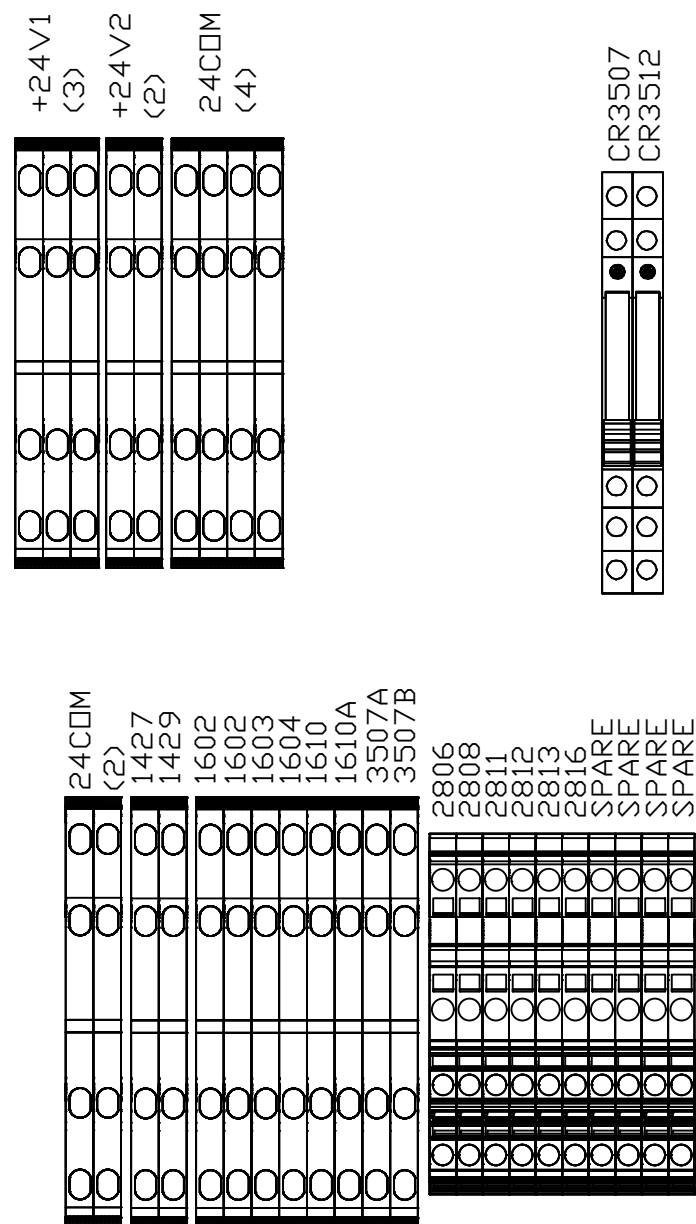

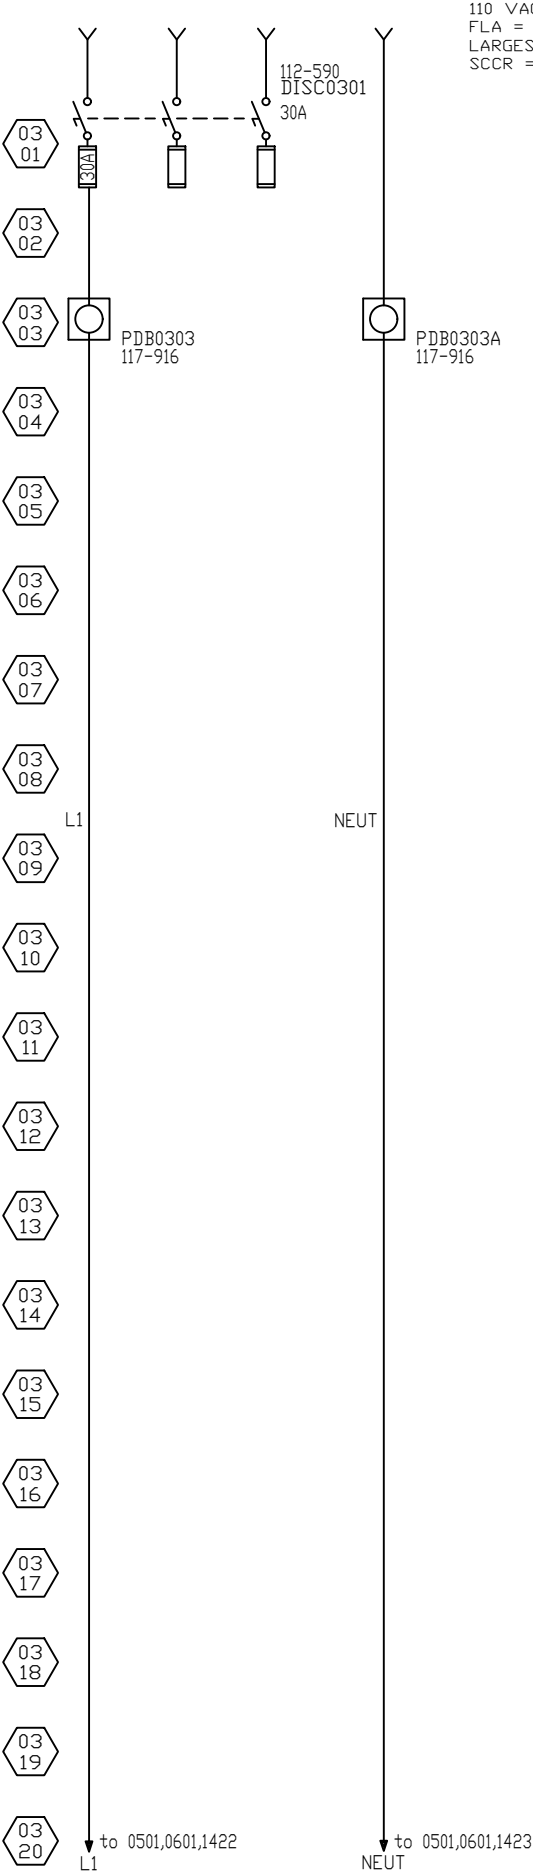

110 VAC, 1 Phase, 60 hz
FLA = 29.3 A
LARGEST MOTOR = 0.5 HP 2.2 A
SCCR = 65 kVA

- 03 21
- 03 22
- 03 23
- 03 24
- 03 25
- 03 26
- 03 27
- 03 28
- 03 29
- 03 30
- 03 31
- 03 32
- 03 33
- 03 34
- 03 35
- 03 36
- 03 37
- 03 38
- 03 39
- 03 40

04
01

04
02

04
03

04
04

04
05

04
06

04
07

04
08

04
09

04
10

04
11

04
12

04
13

04
14

04
15

04
16

04
17

04
18

04
19

PAGE 04 INTENTIONALLY LEFT BLANK

04
20

04
21

04
22

04
23

04
24

04
25

04
26

04
27

04
28

04
29

04
30

04
31

04
32

04
33

04
34


04
35

04
36

04
37

04
38

NOTE: ON ALL VFD'S USE SILFLEX MOTOR CABLE RATED FOR VFDS, P/N A1161404 SHIELDED. GROUND SHIELD AT VFD AND MOTOR.

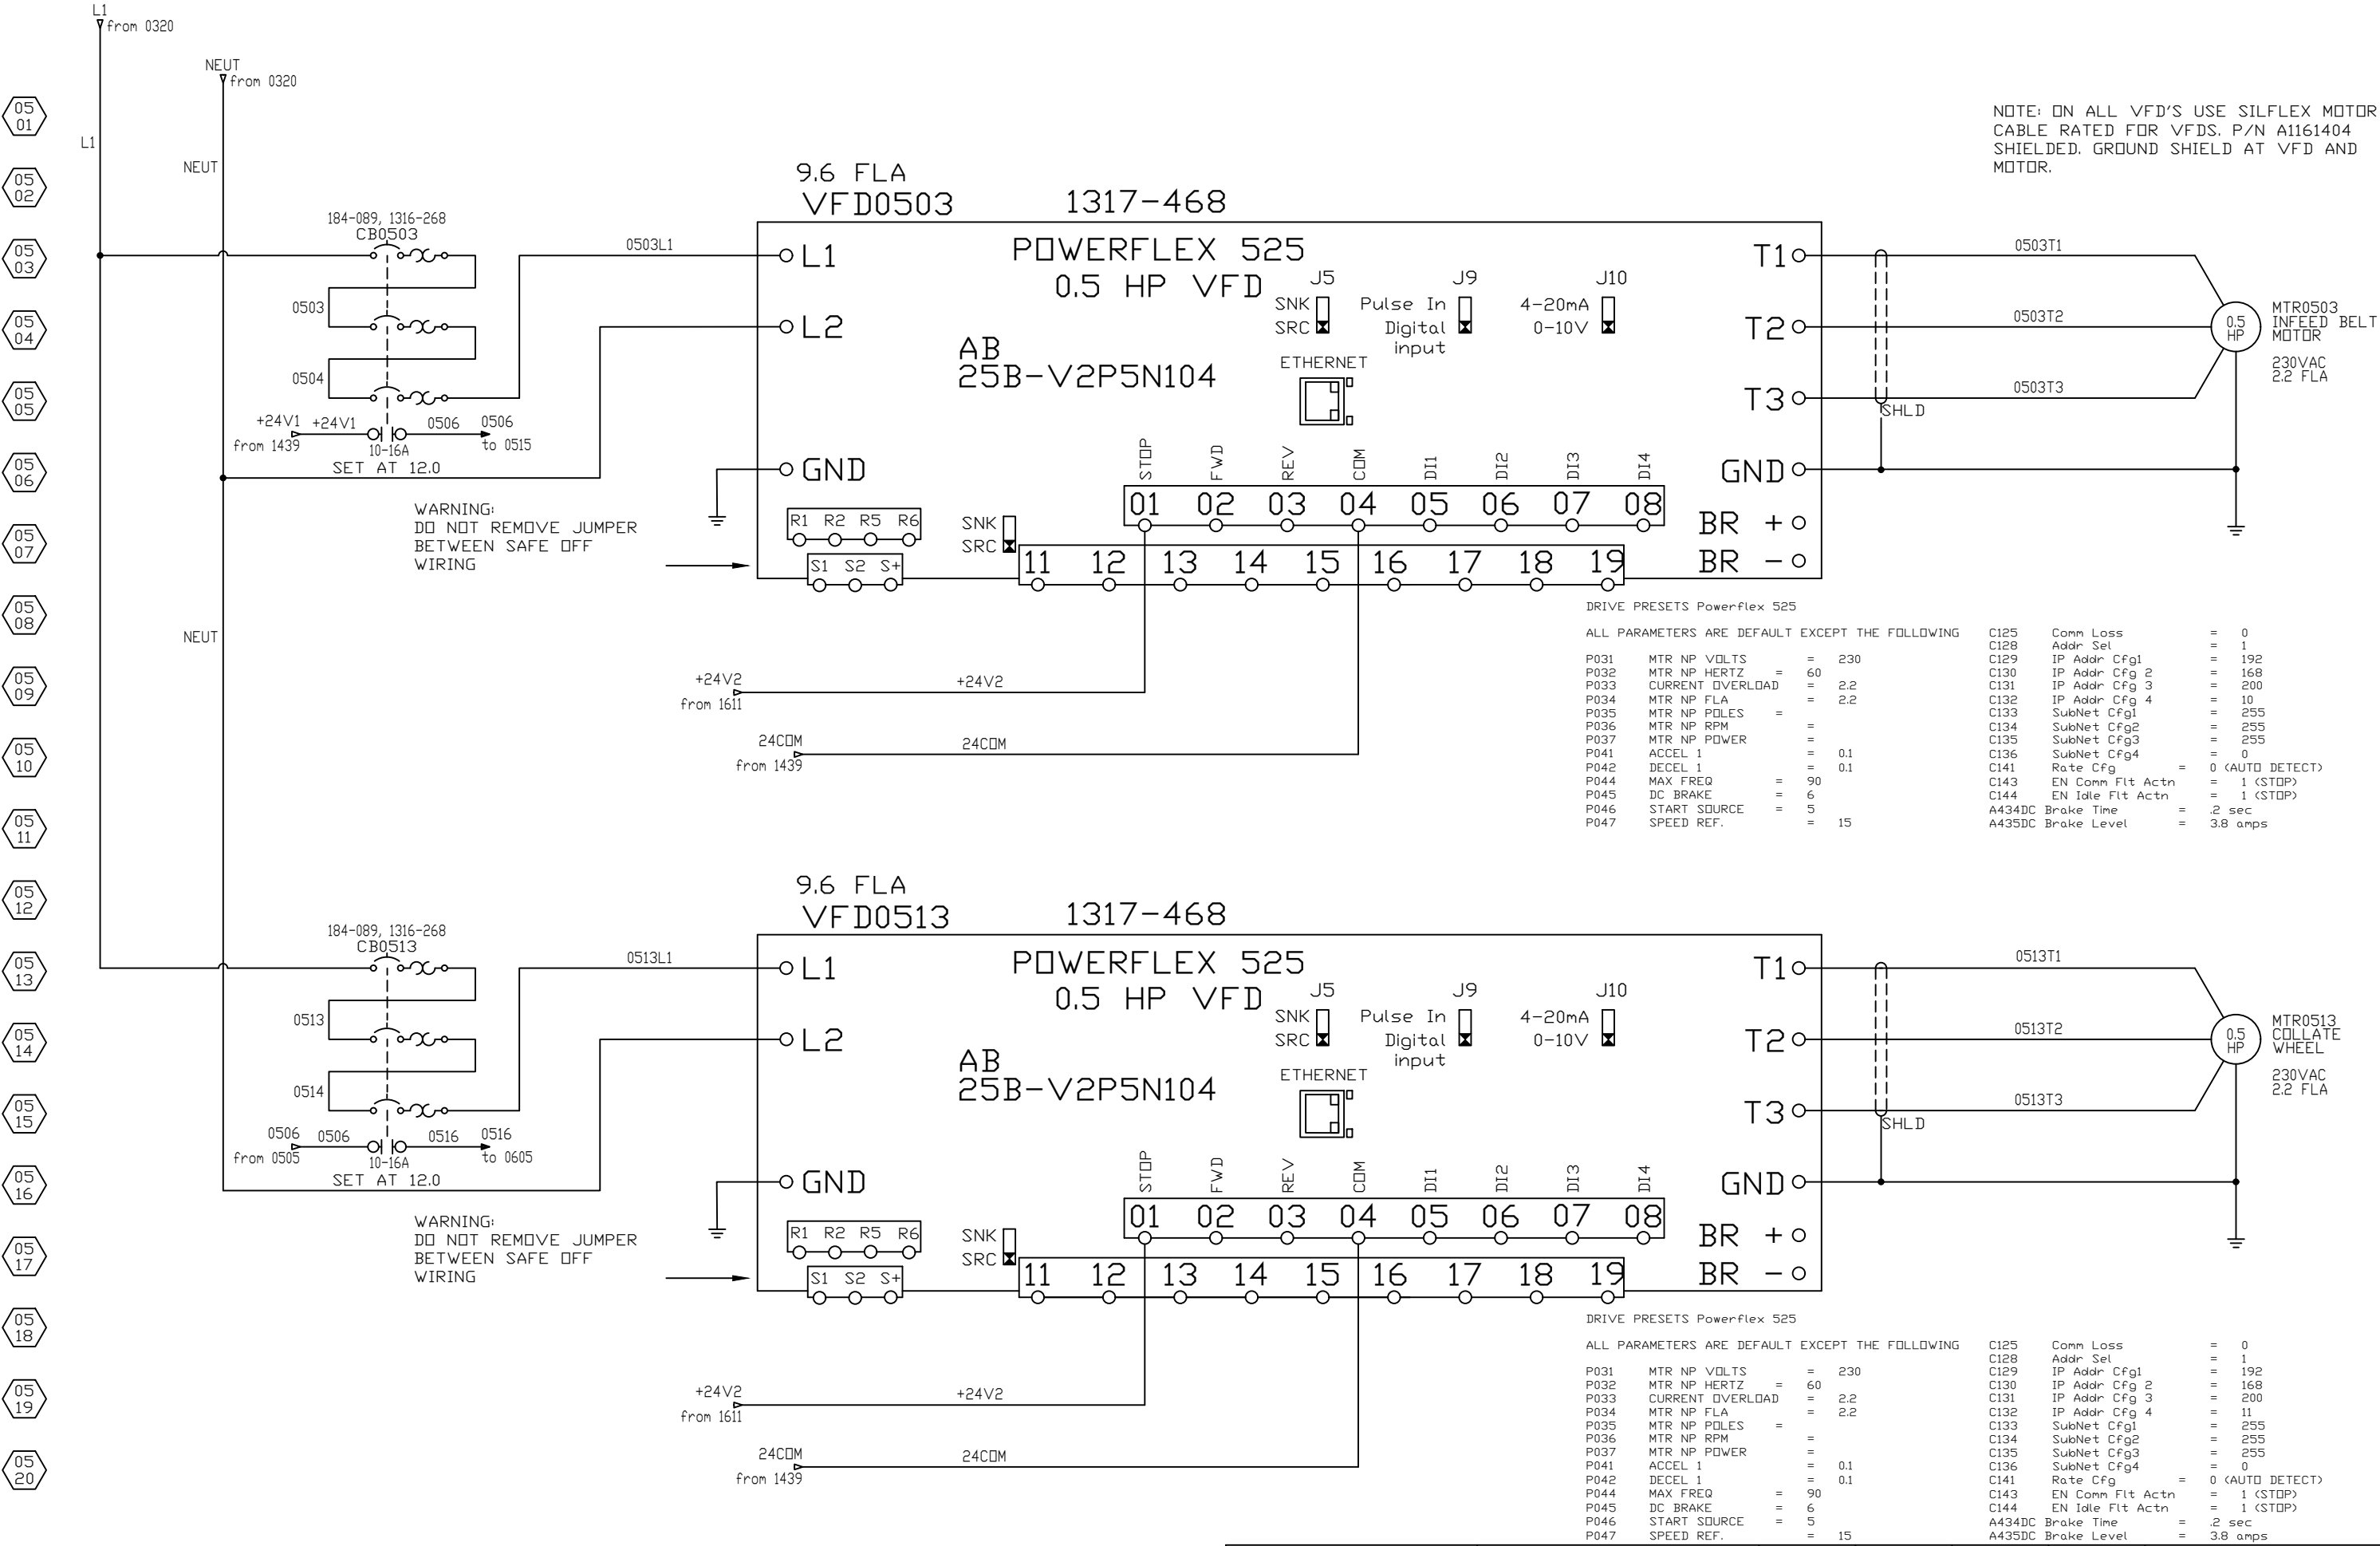

CUSTOMER NAME	XXXXXX	DRAWN BY	JN	DRAWN DATE	10/2022	CHECKED BY	SN	CHECKED DATE	10/2022	SCHEMATIC #	COL-NA-P525NA-STD00
MACHINE DESCRIPTION	Collator	LOCATION DESCRIPTION		SERIAL #		REV.	B	PAGE	05	OF	55

ALL RIGHTS RESERVED, DRAWING REMAINS PROPERTY OF BLUEPRINT AUTOMATION

06
01

06
02

06
03

06
04

06
05

06
06

06
07

06
08

06
09

06
10

06
11

06
12

06
13

06
14

06
15


06
16

06
17

06
18

06
19

06
20

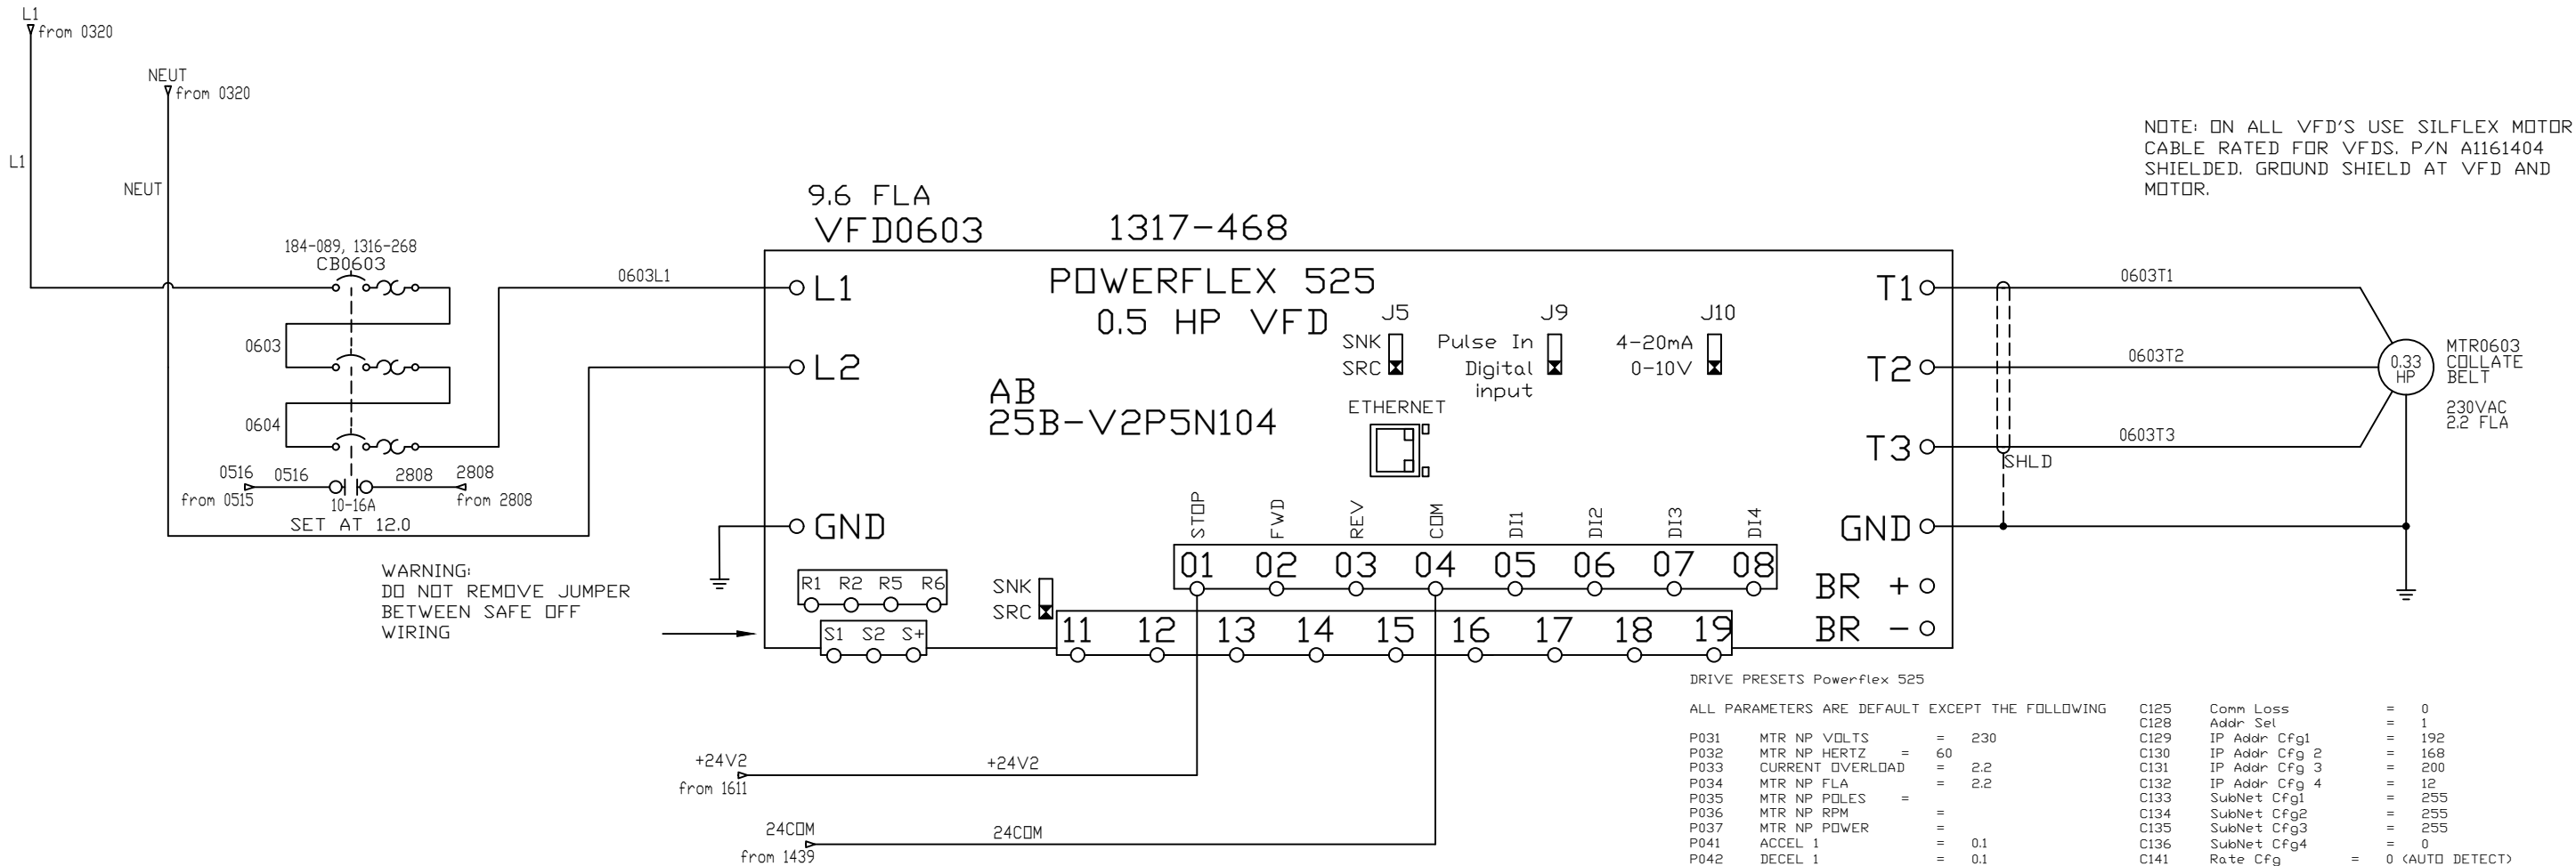

07
01

07
02

07
03

07
04

07
05

07
06

07
07

07
08

07
09

07
10

07
11

07
12

07
13

07
14

07
15

07
16

07
17

07
18

07
19

PAGES 07-13 INTENTIONALLY LEFT BLANK

07
20

07
21

07
22

07
23

07
24

07
25

07
26

07
27

07
28

07
29

07
30

07
31

07
32

07
33

07
34


07
35

07
36

07
37

07
38

PAGE 15 INTENTIONALLY LEFT BLANK

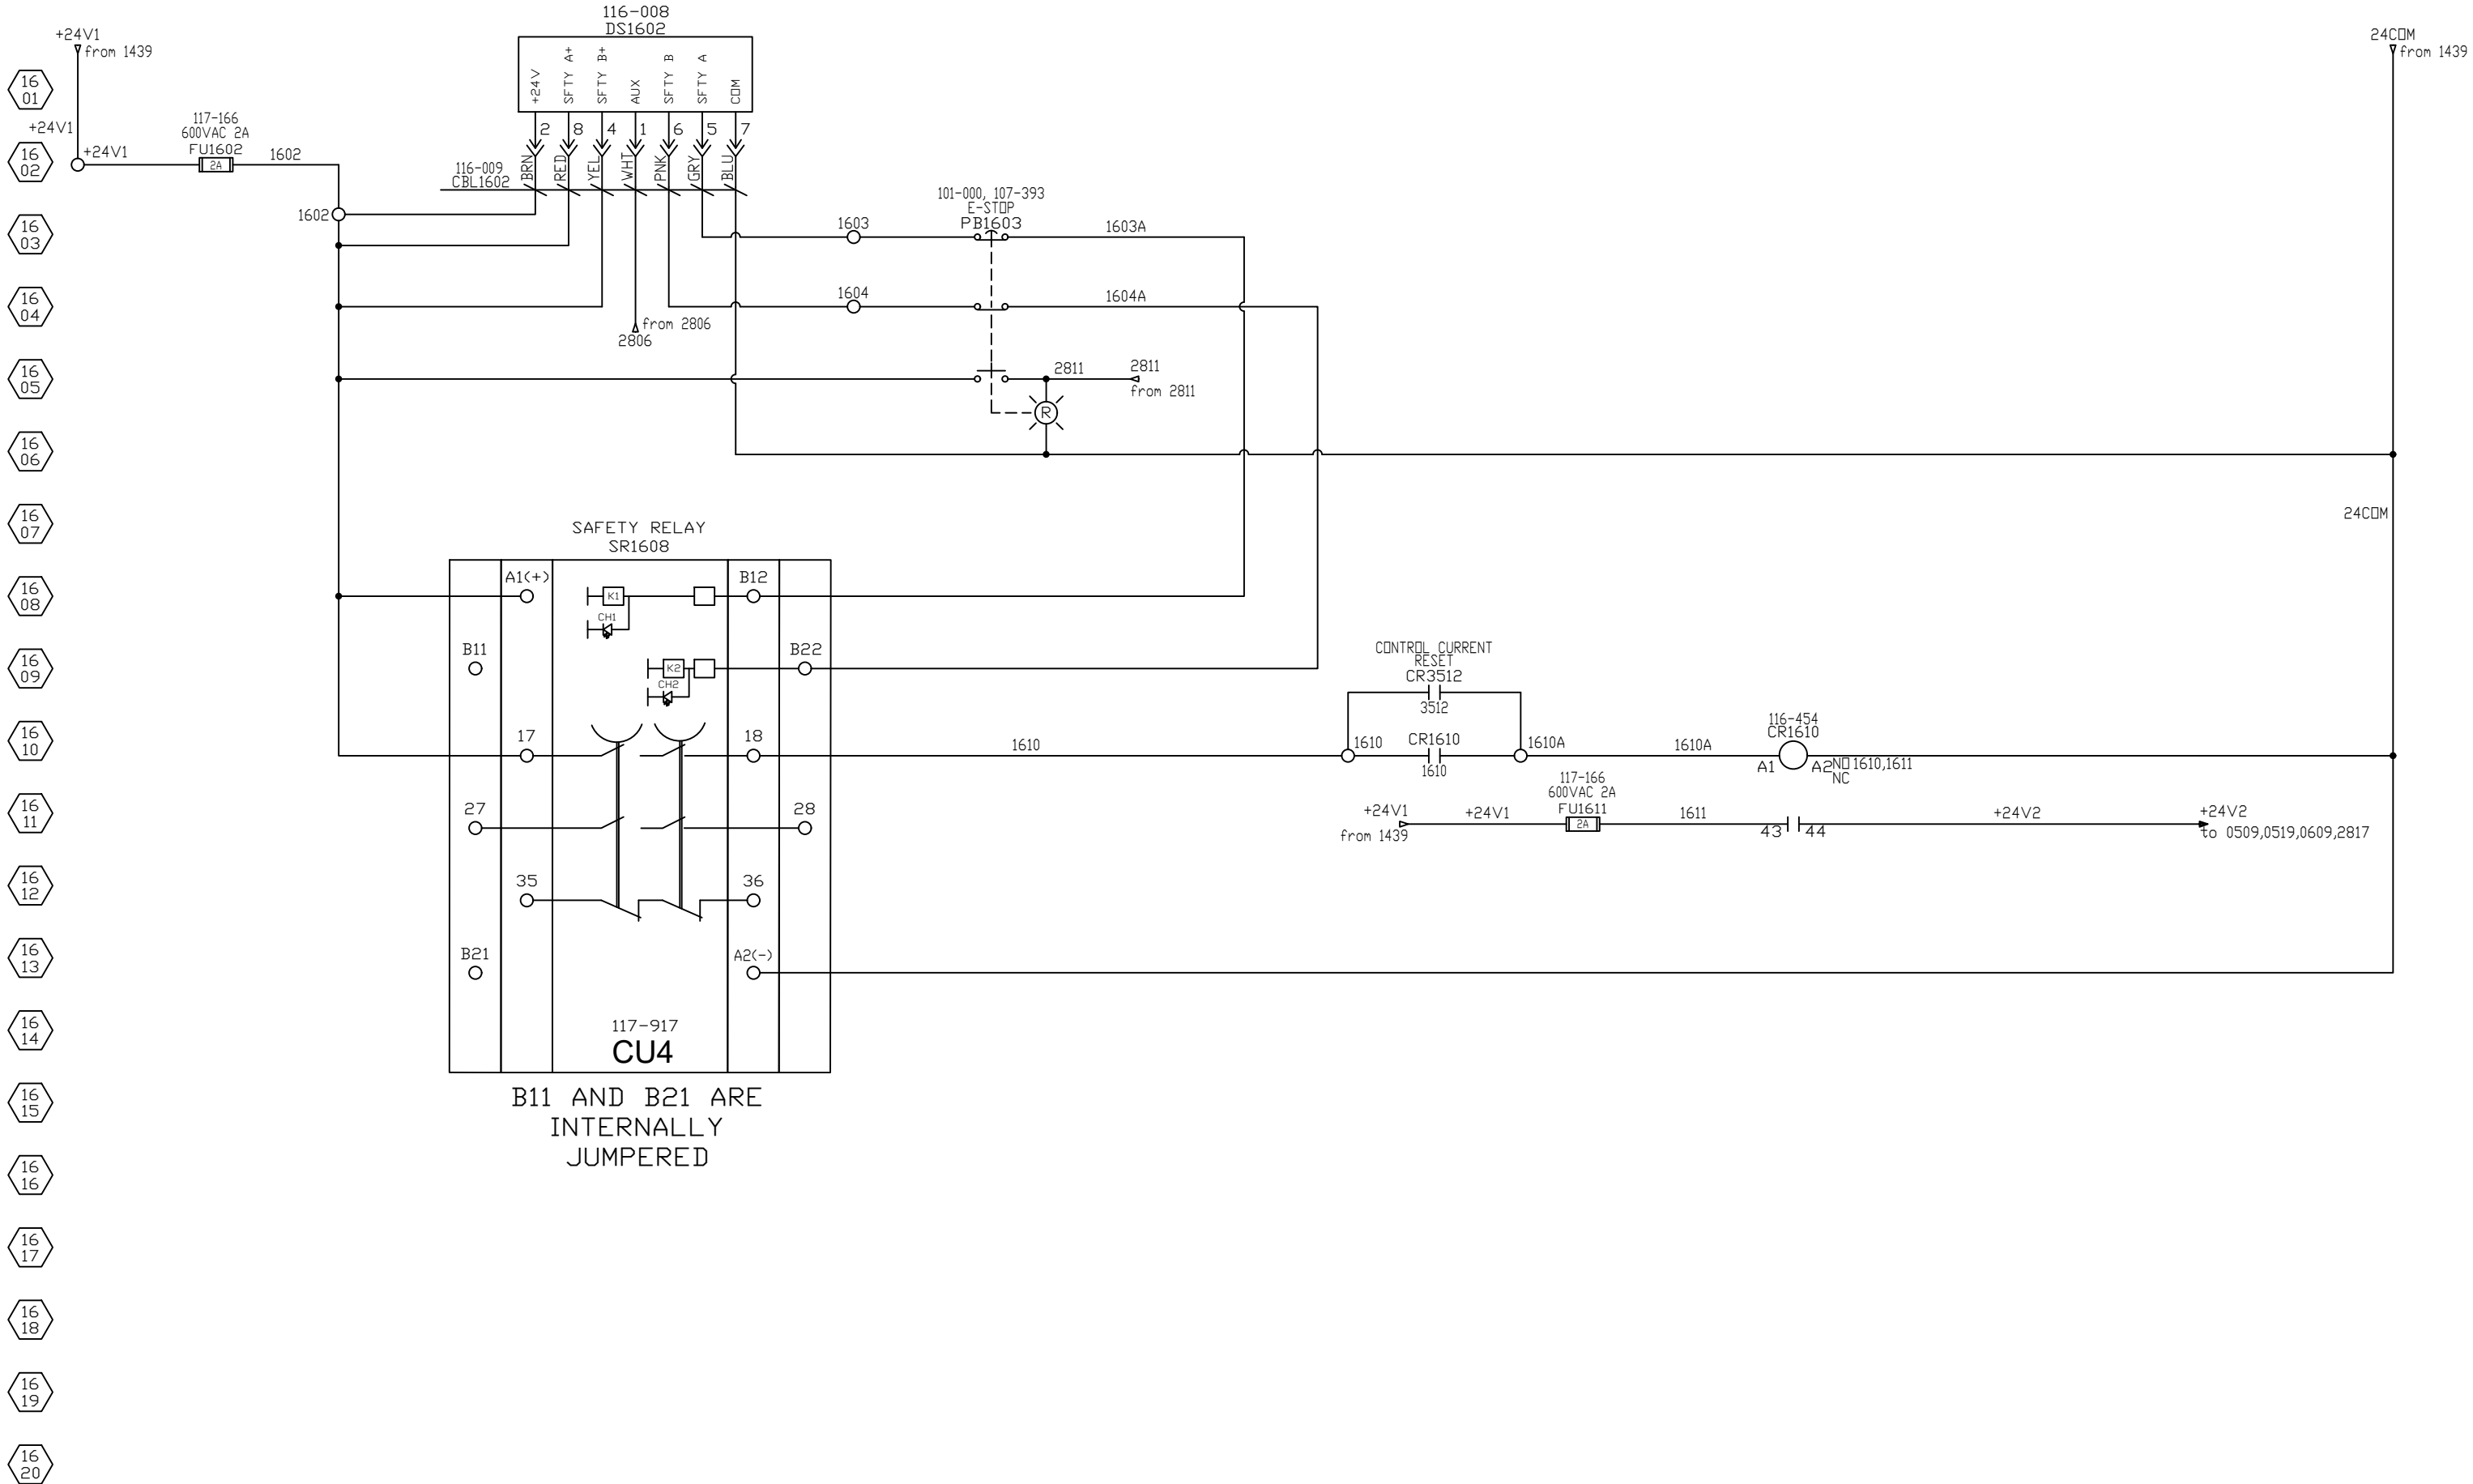

17
01

17
02

17
03

17
04

17
05

17
06

17
07

17
08

17
09

17
10

17
11

17
12

17
13

17
14

17
15

17
16


17
17

17
18

17
19

17
20

PAGES 17 - 27 INTENTIONALLY LEFT BLANK

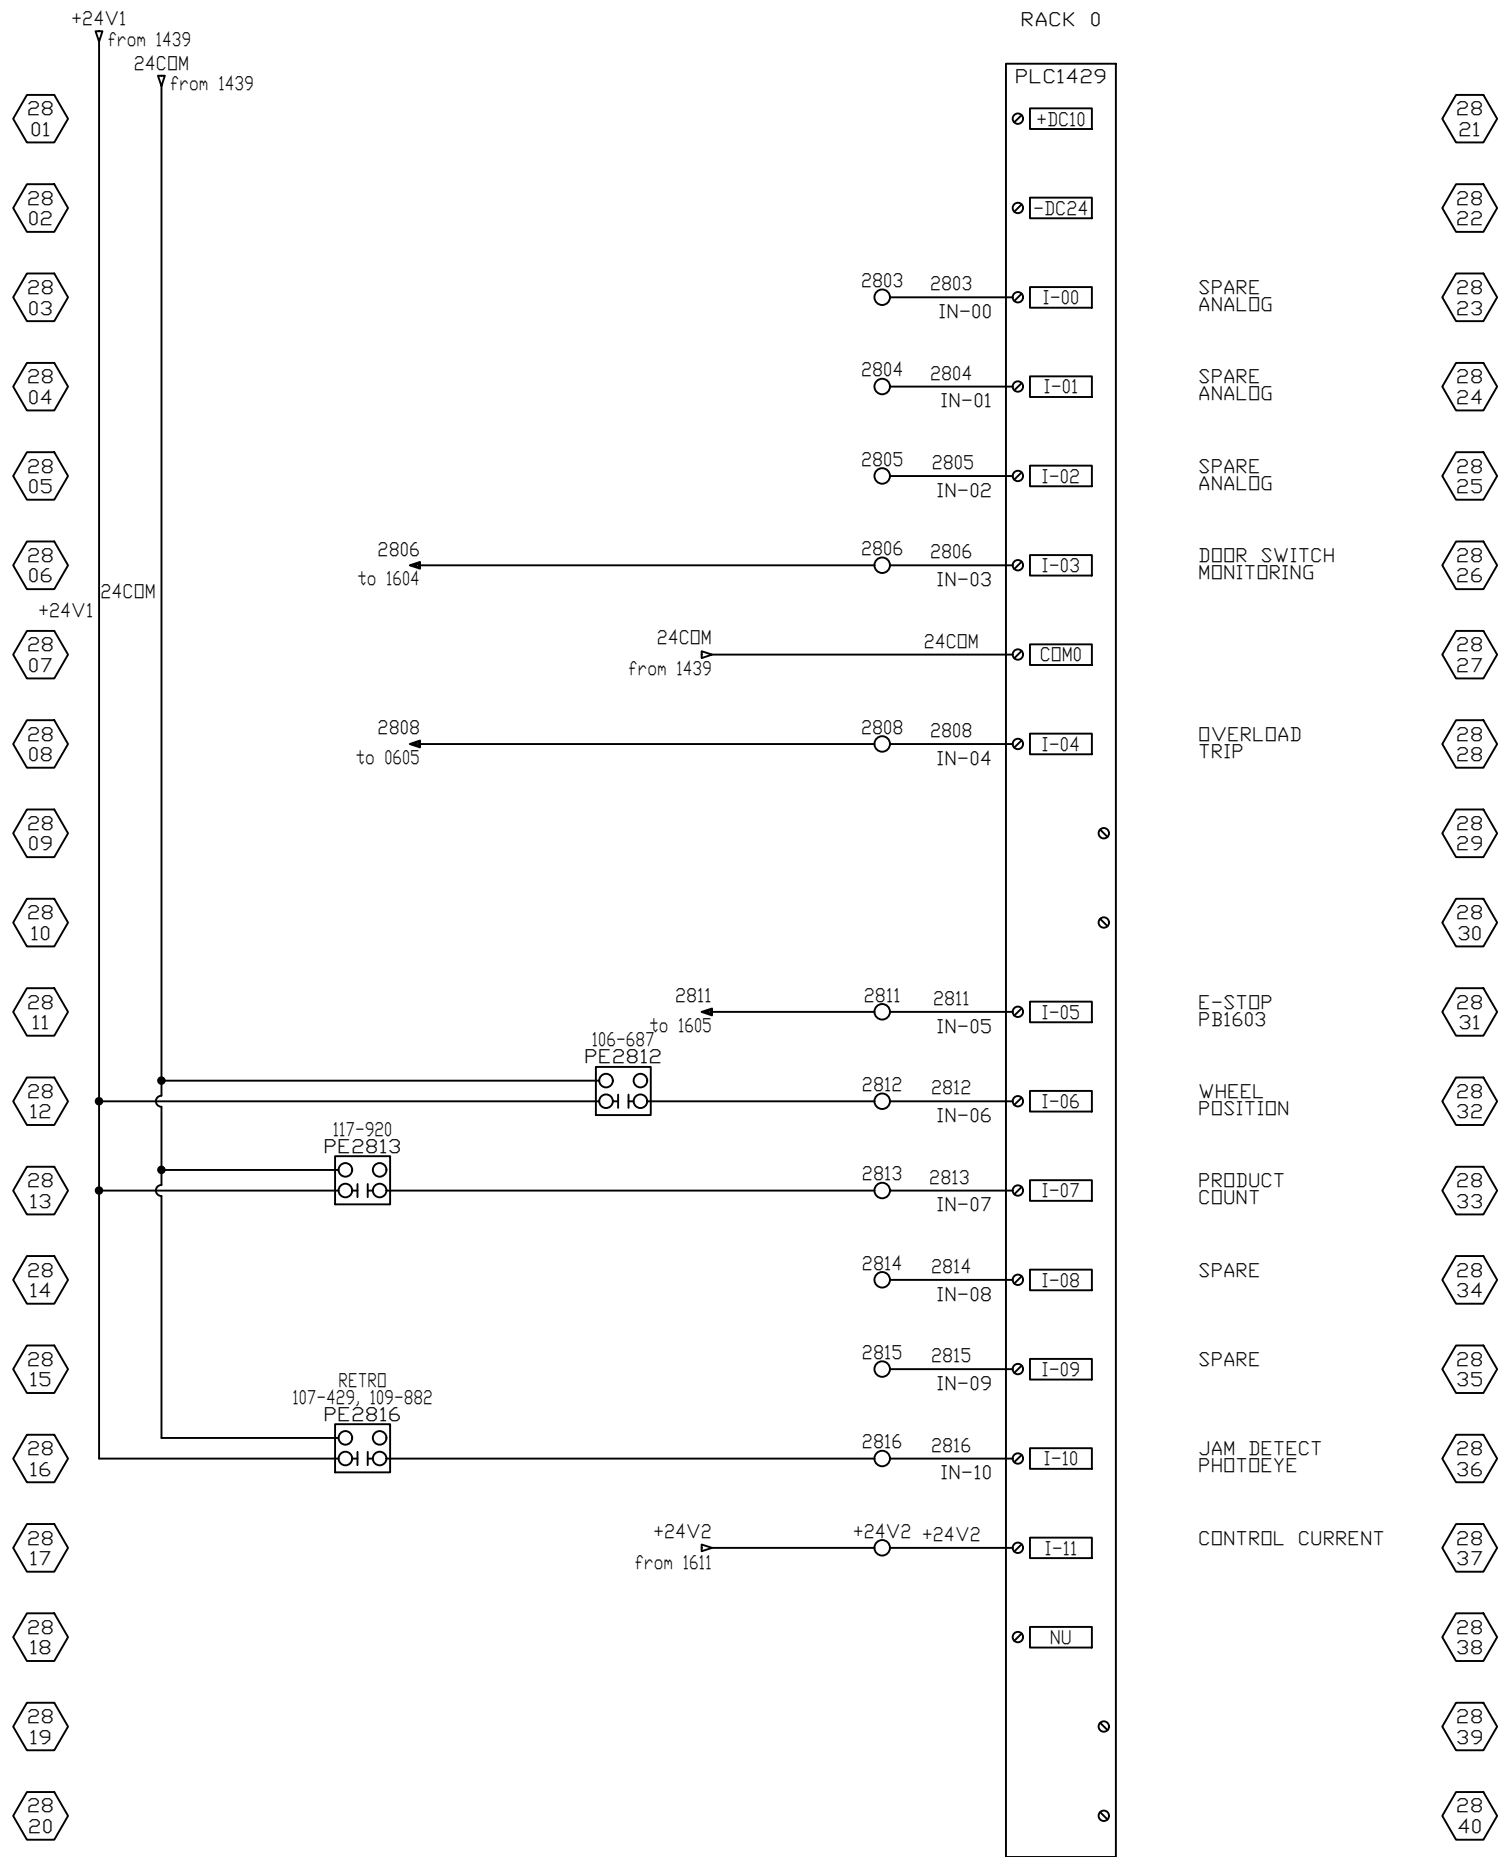

29
01

29
02

29
03

29
04

29
05

29
06

29
07

29
08

29
09

29
10

29
11

29
12

29
13

29
14

29
15

29
16

29
17

29
18

29
19

29
20

PAGES 29 - 34 INTENTIONALLY LEFT BLANK

29
21

29
22

29
23

29
24

29
25

29
26

29
27

29
28

29
29

29
30

29
31

29
32

29
33

29
34

29
35


29
36

29
37

29
38

29
39

29
40

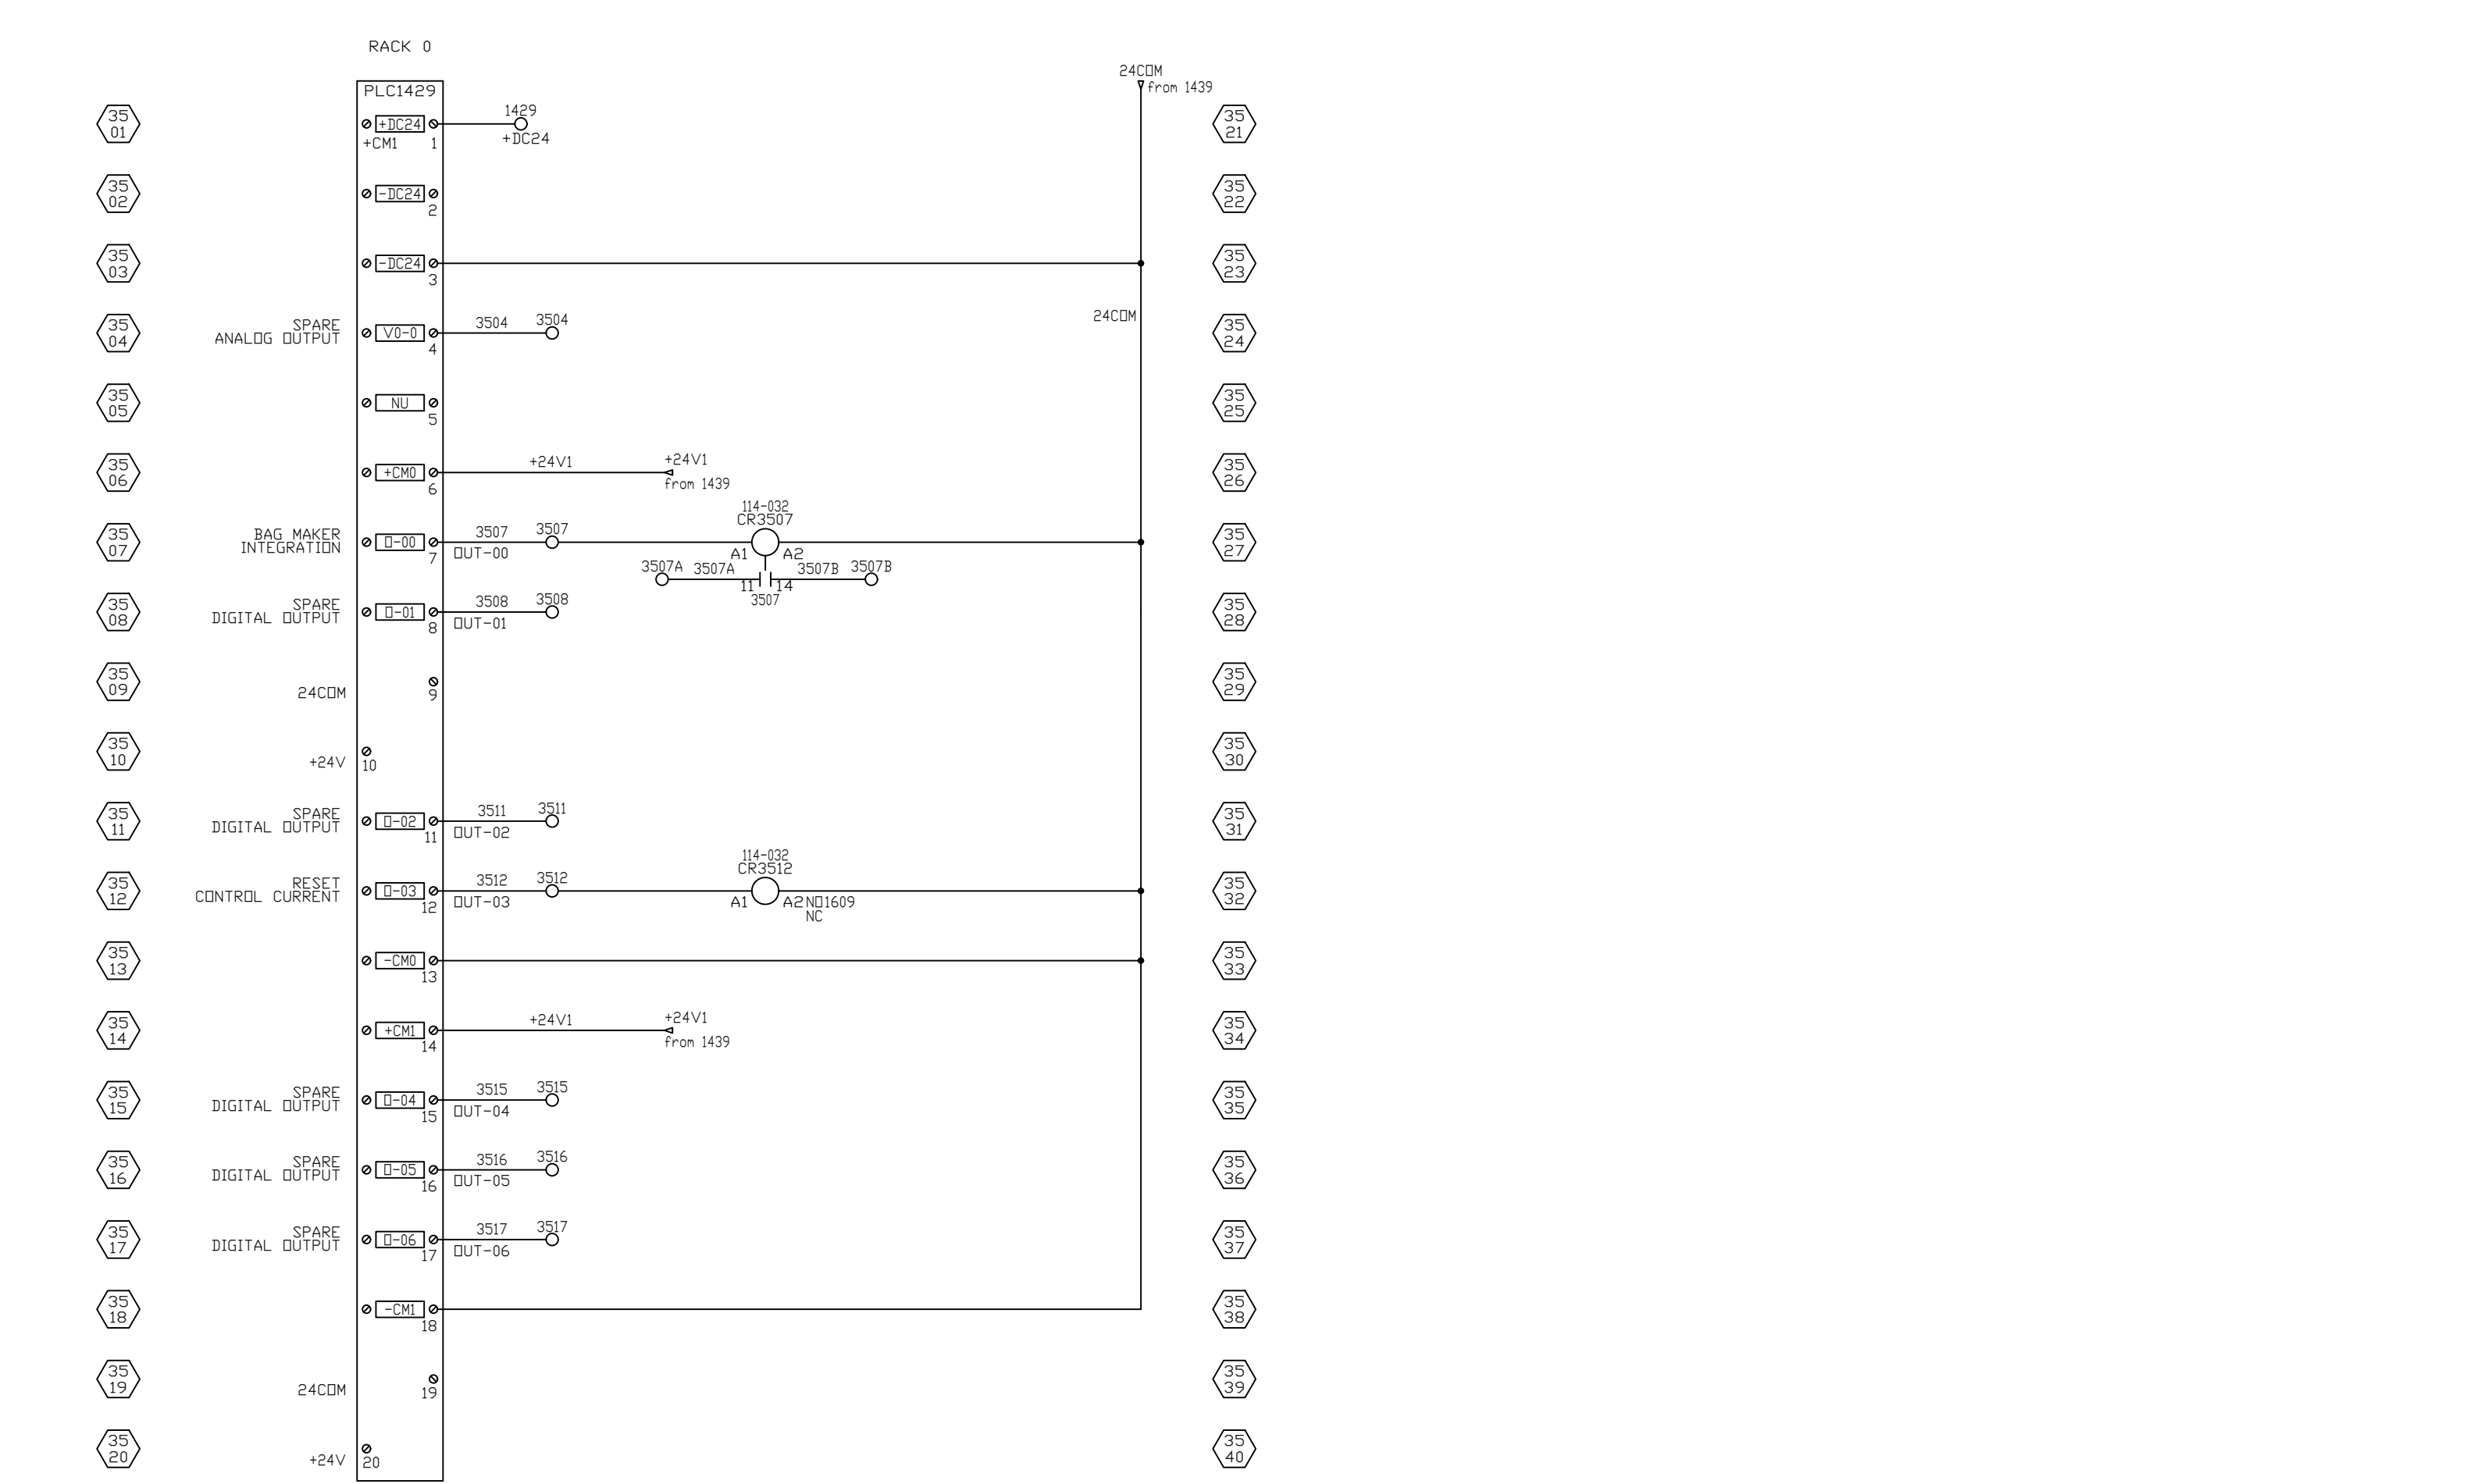

36
01

36
02

36
03

36
04

36
05

36
06

36
07

36
08

36
09

36
10

36
11

36
12

36
13

36
14

36
15

36
16

36
17

36
18

36
19

36
20

36
21

36
22

36
23

36
24

36
25

36
26

36
27

36
28

36
29

36
30

36
31

36
32

36
33

36
34

36
35

36
36

36
37


36
38

36
39

36
40

PAGES 36 - 51 INTENTIONALLY LEFT BLANK

Ethernet Network

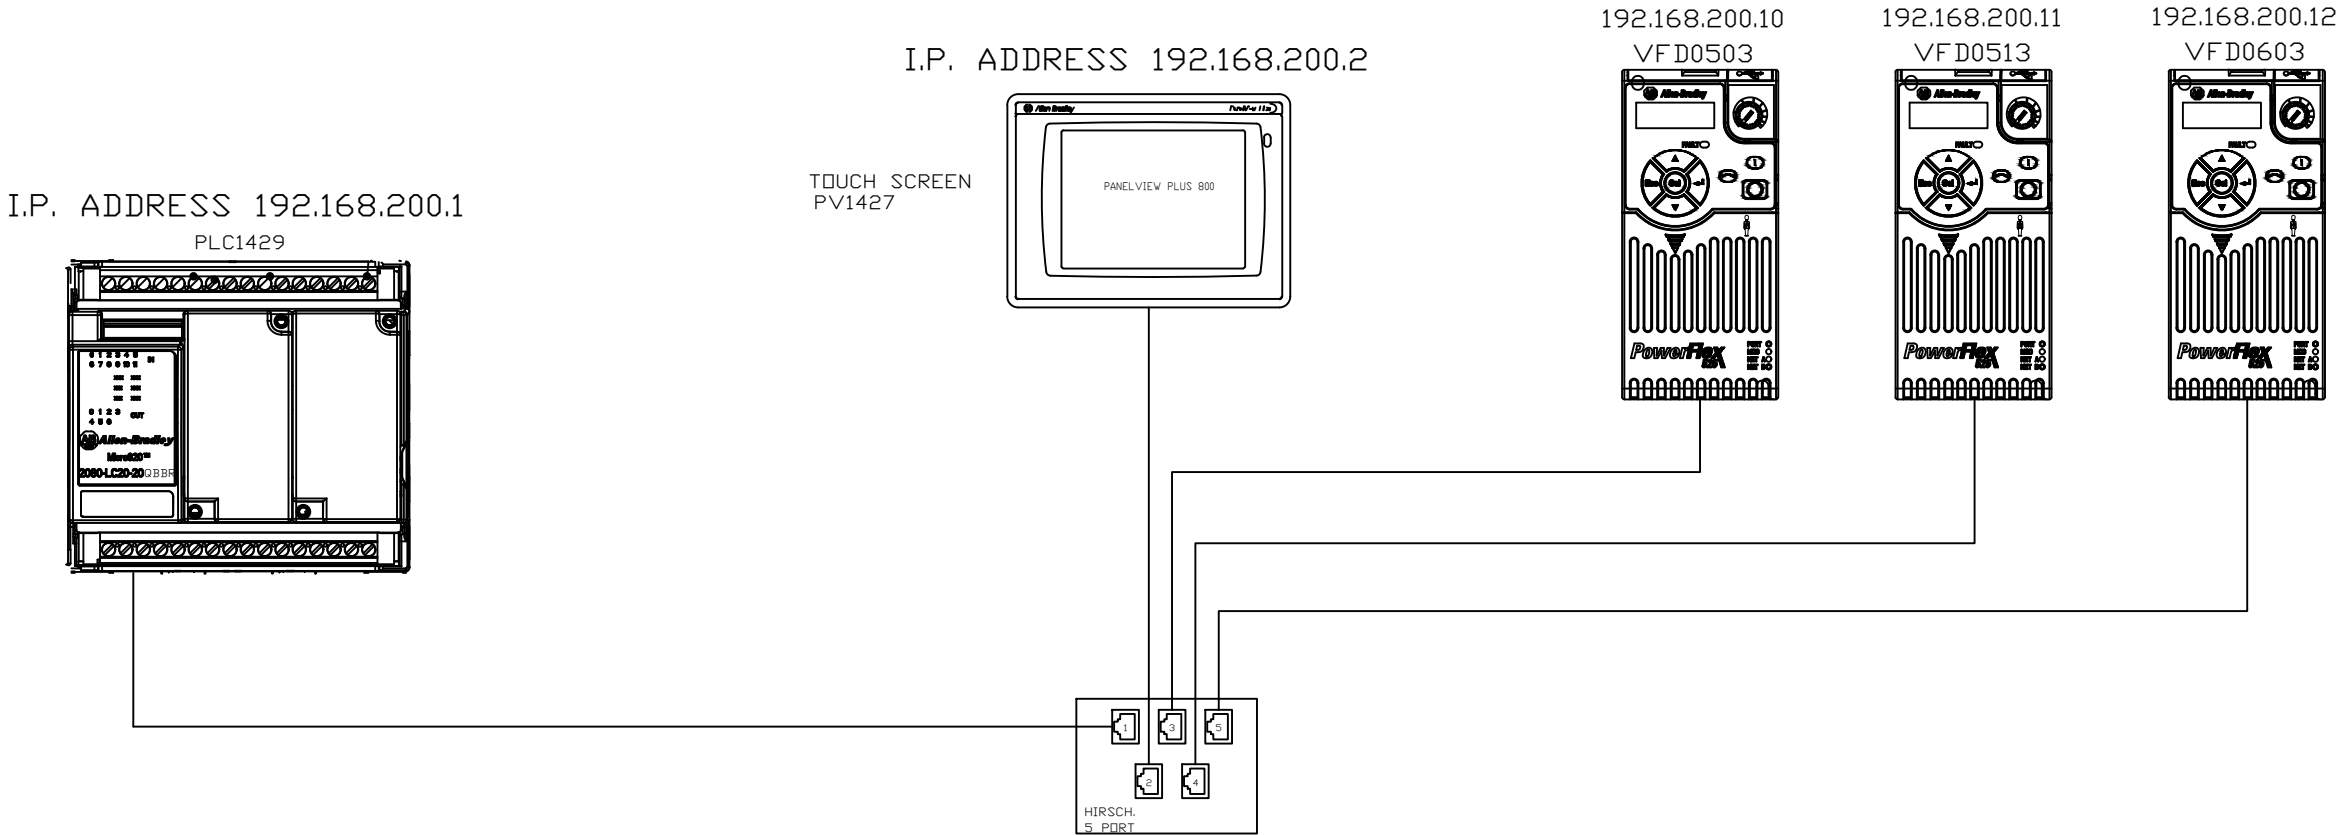

53
01

53
02

53
03

53
04

53
05

53
06

53
07

53
08

53
09

53
10

PAGES 53 - 54 INTENTIONALLY LEFT BLANK

53
11

53
12

53
13

53
14

53
15

53
16

53
17

53
18

53
19

53
20

53
21

53
22

53
23

53
24

53
25

53
26

53
27

53
28

53
29

53
30

53
31

53
32

53
33

53
34

53
35

53
36

53
37

53
38



CUSTOMER NAME XXXXX		DRAWN BY JN	DRAWN DATE 10/2022	CHECKED BY SN	CHECKED DATE 10/2022	SCHEMATIC # COL-NA-P525NA-STD00	
MACHINE DESCRIPTION Collator			LOCATION DESCRIPTION		SERIAL #	REV. B	PAGE 53 OF 55

ALL RIGHTS RESERVED, DRAWING REMAINS PROPERTY OF BLUEPRINT AUTOMATION

Electrical Power Component Torque Specifications

Mfg	Mfg Number	Description	Torque (Nm)	Torque (lb-in)
AB	194RF-NC030R* 194RF-NJ030R* 194RF-NN030R* 194R-NA100P3 194R-NA200P3	Disconnect, Rotary, 30A	1.4Nm	12 lb-in
AB	194RF-NJ060R* 194RF-NN060R* 194RF-NA300P3	Disconnect, Rotary, 60A	4.0Nm	35lb-in
AB	100S-C30DJ22C	Contactor, Safety	1.5-3.5Nm	13-31lb-in
AB	1492-PD3C141	Distribution Block, 3 Phase	none provided	
AB	140MCWTE	Terminal, 3Phase Feeder	3.0-3.5Nm	27-31lb-in
AB	140MC2EB63	Motor Starter, 4.0-6.3A	2.0-2.5Nm	18-22lb-in
AB	140MC2EB25	Motor Starter, 1.6-2.5A	2.0-2.5Nm	18-22lb-in
AB	140MC2EB16	Motor Starter, 1.0-1.6A	2.0-2.5Nm	18-22lb-in
AB	140MC2EB10	Motor Starter, 0.63-1.0A	2.0-2.5Nm	18-22lb-in
AB	100C12UZJ10	Contactor, Motor	1.0-2.5Nm	8.9-22lb-in
Mennekes	20MS1A-M2	Disconnect, Rotary, Non-Fused, 25A	none provided	
AB	22AD2P3N104	Drive, Inverter, PowerFlex 4M	1.7-2.2Nm	14-20lb-in
AB	22BD2P3N104	Drive, Inverter, PowerFlex 525	1.7-2.2Nm	14-20lb-in
ACME	T-2A-53340-1S	Transformer, 3 Phase, 480/240	none provided	
AB	2094-BC01-M01-S	Drive, Servo, Kinetix 6000	2.26Nm	20lb-in
Micron	B750BTZ13JK	Transformer, 1 Phase,	none provided	
Weidmuller	991549	Receptacle	none provided	
Hoffman	T-FP41	Cooling Fan	none provided	
AB	1769-PA4	Power Supply, Compact Logix, 4A	1.27Nm	11.24lb-in
AB	1606-XL240E	Power Supply, 240VAC to 24VDC	0.8Nm	7.0lb-in
Mersen	USCC1I	Fuse Holder, 1 Pole, Class CC	1.7Nm	14lb-in
Mersen	USCC2I	Fuse Holder, 2 Pole, Class CC	1.7Nm	14lb-in
Mersen	USCC3I	Fuse Holder, 3 Pole, Class CC	1.7Nm	14lb-in

ALL RIGHTS RESERVED, DRAWING REMAINS PROPERTY OF BLUEPRINT AUTOMATION