

220 VAC 1 PH COLLATOR WITH HMI

BPA SCHEMATIC BUILD CONTENTS	
SHEET #	
00	DRAWING INDEX AND PROJECT TITLE
01	SYSTEM LAYOUT
02	PANEL LAYOUT
03	3 PHASE POWER DISTRIBUTION
04	BLANK
05	VFD X 2
06	VFD X 1
07 - 13	BLANK
14	24VDC DISTRIBUTION
15	BLANK
16	SAFETY CIRCUIT
17 - 27	BLANK
28	PLC INPUTS
29 - 34	BLANK
35	PLC OUTPUTS
36 - 51	BLANK
52	MODBUS NETWORK
53 - 54	BLANK
55	TORQUE SPECIFICATIONS

For all 24VDC fuse holders, Use: Mersen USCC1I-DC24
For all other fuse holders, Use: Mersen USCC1I

Minimum Wire Size


Internal Control Circuits: 18 AWG.

Internal 24VDC wiring 18 AWG:
a. Blue (+24VDC)
b. Blue/White Stripe (common)

Power Wiring 14 AWG (220 VAC) - Black colored insulation:
a. Black (phase A)
b. Black (phase B)
c. Green/Yellow (Ground)

Motor wiring with standard 4 conductor VFD cable consisting of three conductors with ground and shield:
a. Black/#1 (phase A)
b. Black #2 (phase B)
c. Black #3 (phase C)
d. Green/Shield (ground)

PLC PROGRAM NAME
HMI PROGRAM NAME

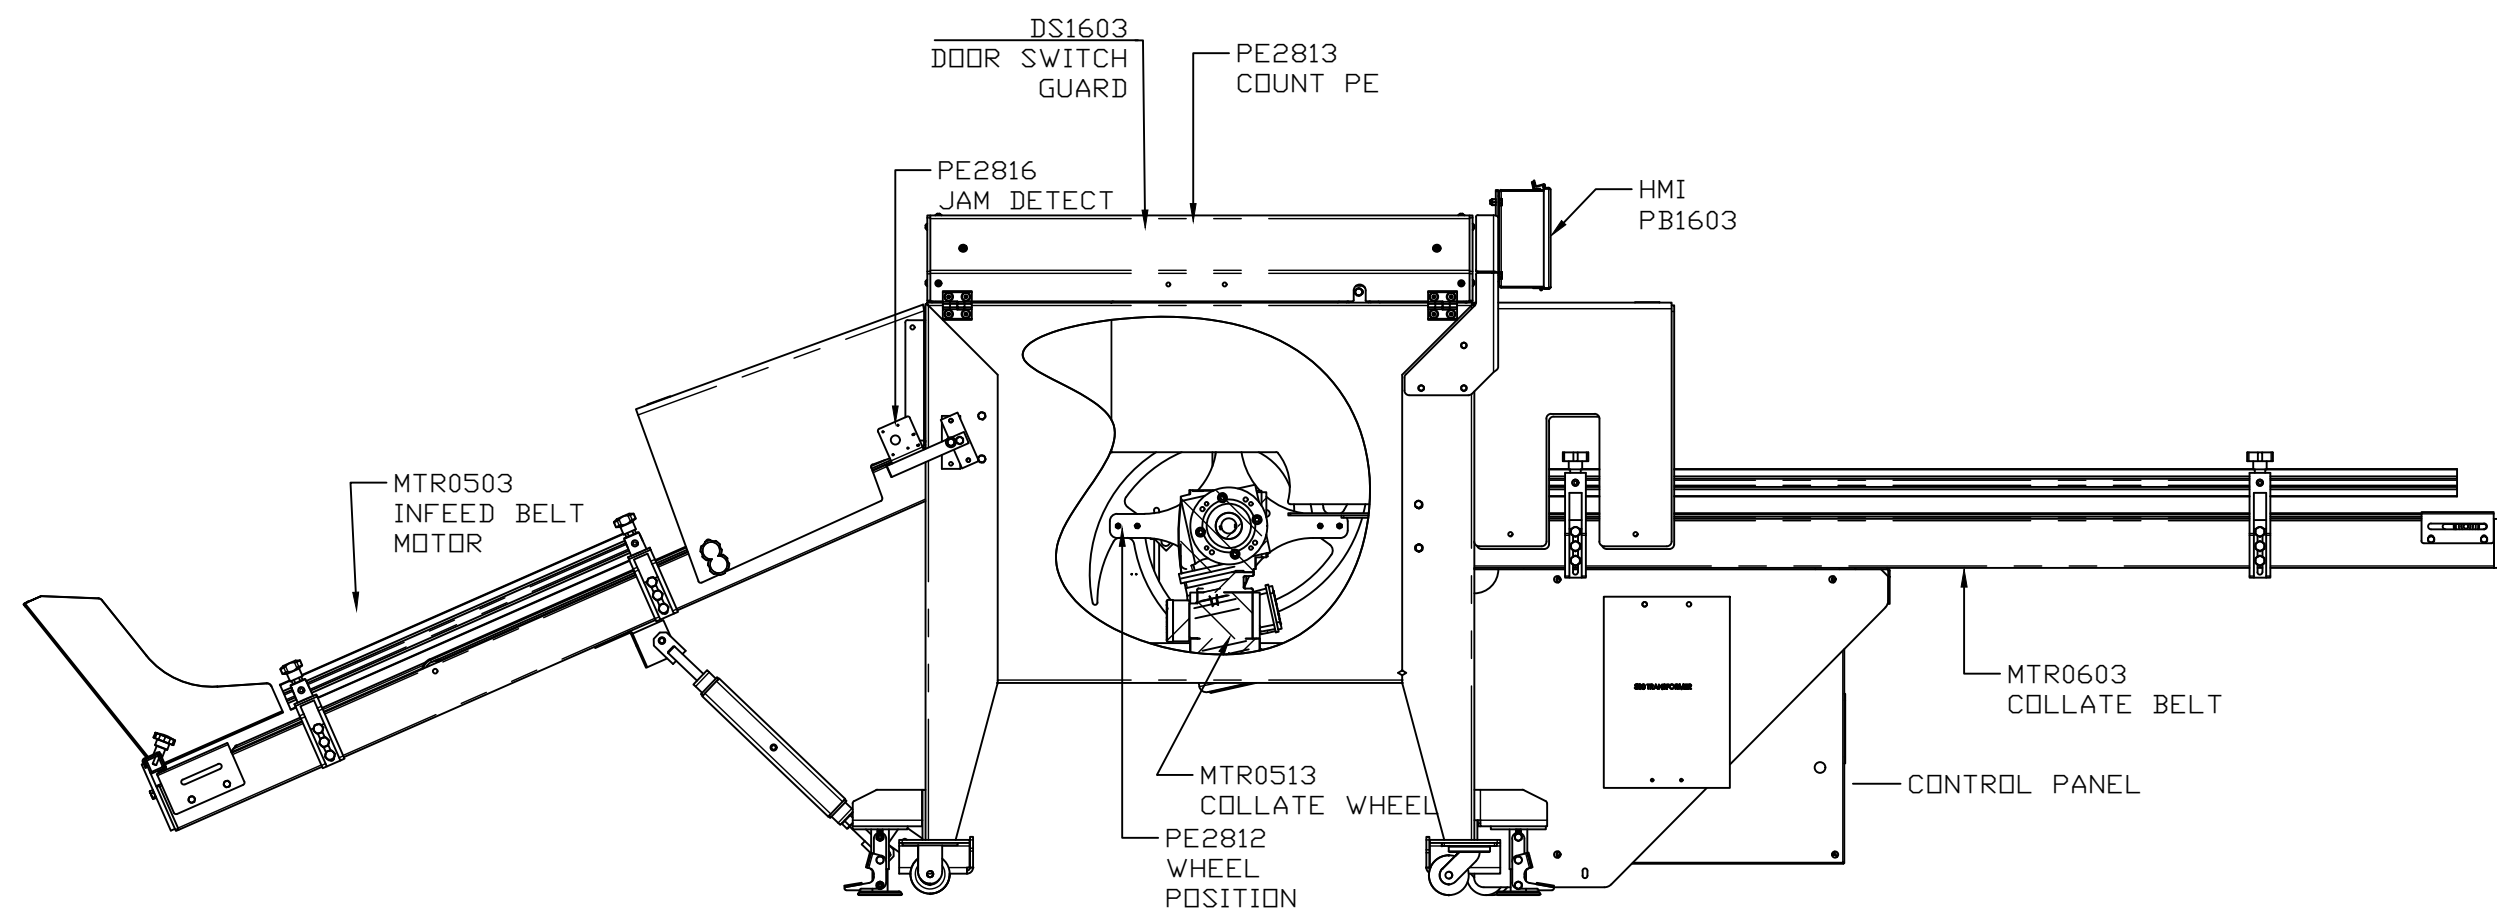

02
01

02
02

02
03

02
04

02
05

02
06

02
07

02
08

02
09

02
10

02
11

02
12

02
13

02
14

02
15

02
16



02
17


02
18

02
19

02
20

HOFFMAN 24X24

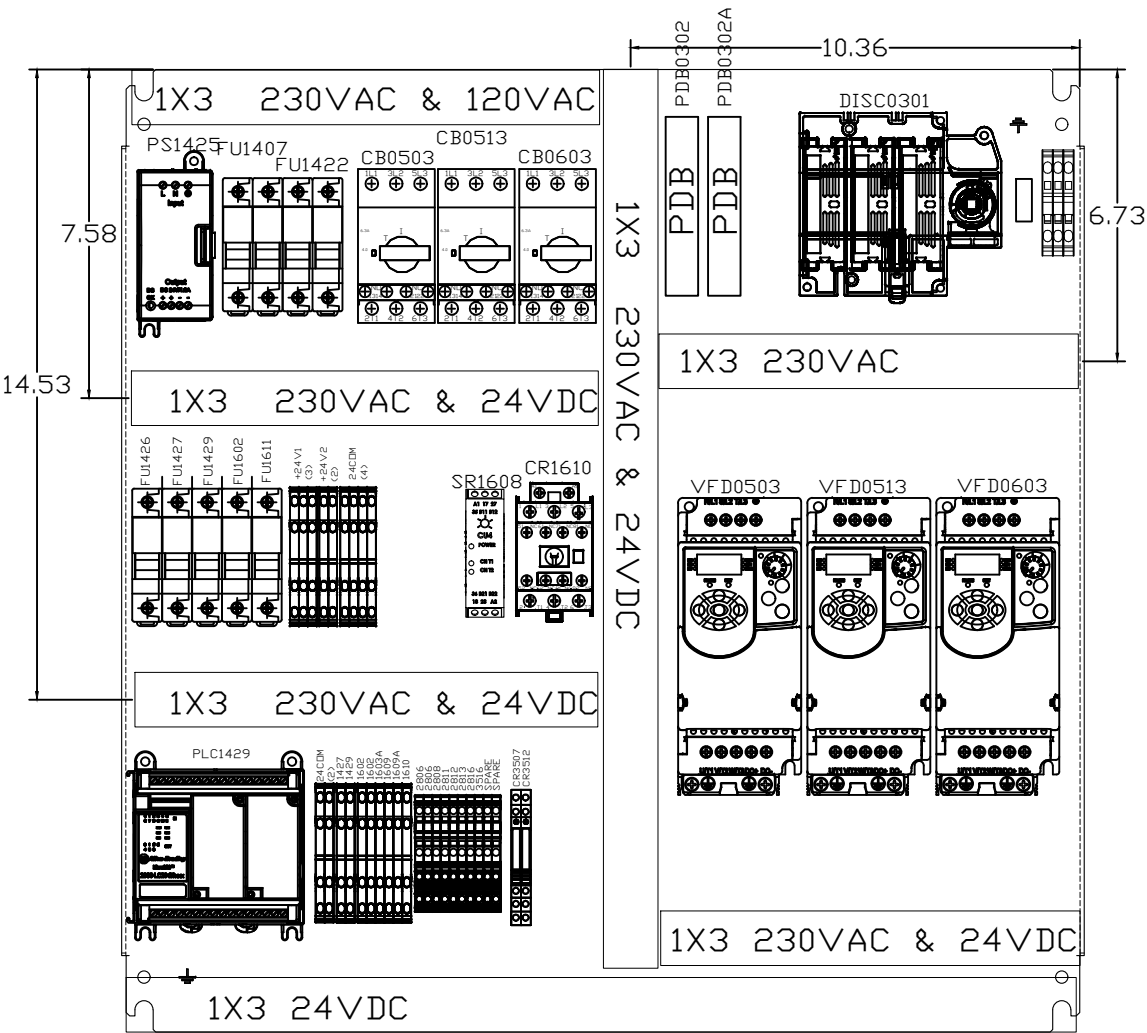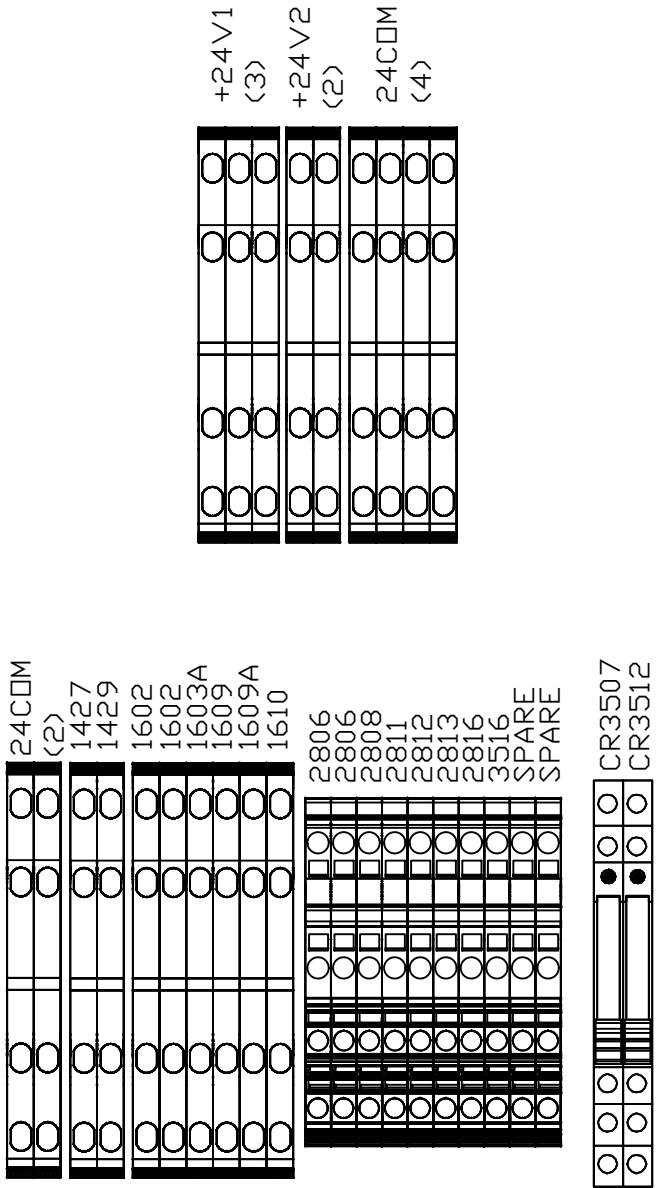

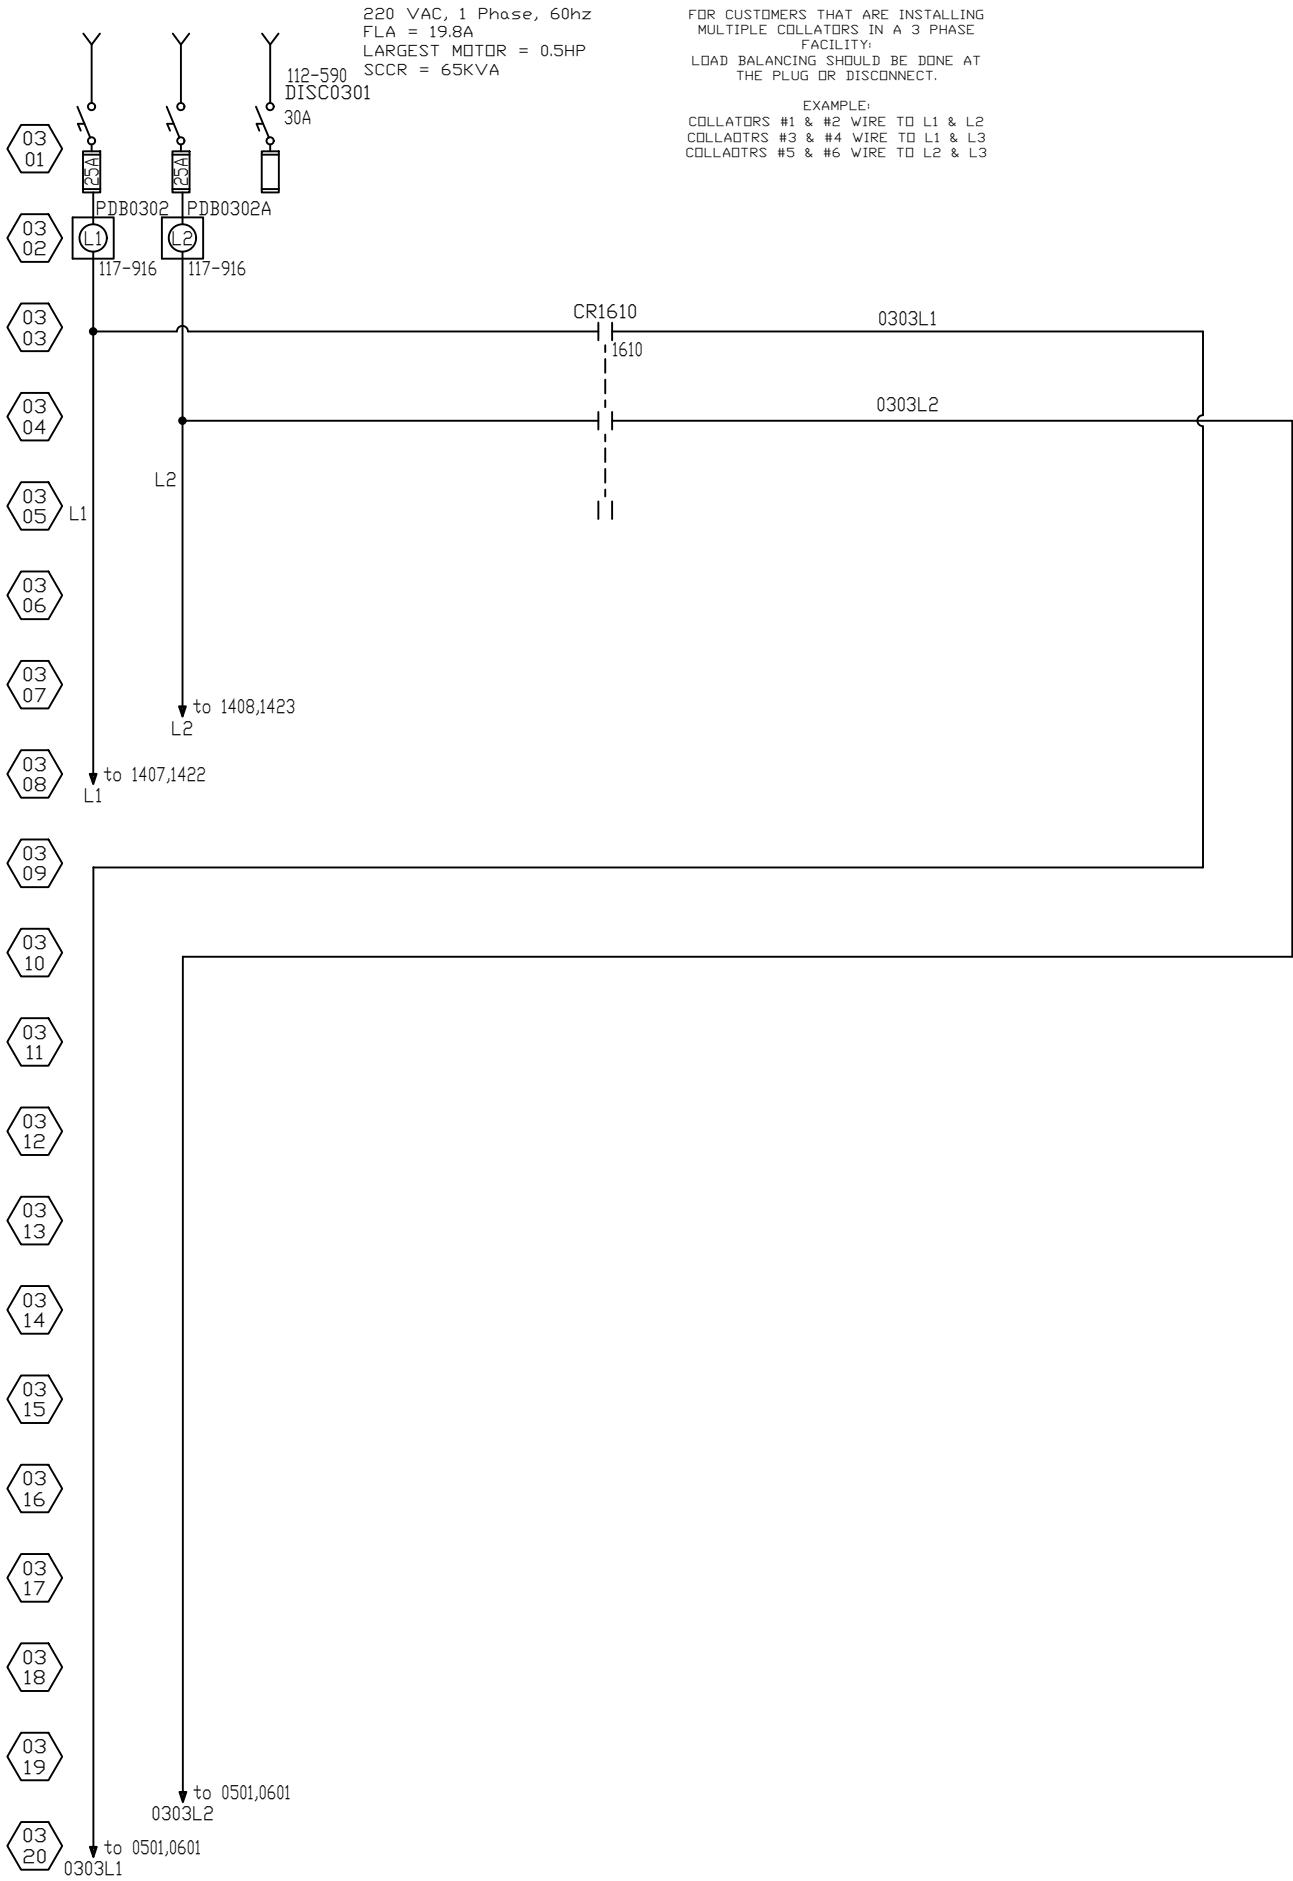

FOR CUSTOMERS THAT ARE INSTALLING
MULTIPLE COLLATORS IN A 3 PHASE
FACILITY:
LOAD BALANCING SHOULD BE DONE AT
THE PLUG OR DISCONNECT.

EXAMPLE:
COLLATORS #1 & #2 WIRE TO L1 & L2
COLLADTRS #3 & #4 WIRE TO L1 & L3
COLLADTRS #5 & #6 WIRE TO L2 & L3

- 03 21
- 03 22
- 03 23
- 03 24
- 03 25
- 03 26
- 03 27
- 03 28
- 03 29
- 03 30
- 03 31
- 03 32
- 03 33
- 03 34
- 03 35
- 03 36
- 03 37
- 03 38
- 03 39
- 03 40



CUSTOMER NAME	DRAWN BY	DRAWN DATE	CHECKED BY	CHECKED DATE	SCHEMATIC #
XXXXX	SN	8/2017	CE	8/2017	COL-NA-P4M-STD00
MACHINE DESCRIPTION	LOCATION DESCRIPTION	SERIAL #	REV.	PAGE	
Collator			D	03 OF 55	

ALL RIGHTS RESERVED. DRAWING REMAINS PROPERTY OF BLUEPRINT AUTOMATION

04
01

04
02

04
03

04
04

04
05

04
06

04
07

04
08

04
09

04
10

04
11

04
12

04
13

04
14

04
15

04
16

04
17

04
18

04
19

PAGE 04 WAS INTENTIONALLY LEFT BLANK

04
20

04
21

04
22

04
23

04
24

04
25

04
26

04
27

04
28

04
29

04
30

04
31

04
32

04
33


04
34

04
35

04
36

04
37

04
38



07
01

07
02

07
03

07
04

07
05

07
06

07
07

07
08

07
09

07
10

07
11

07
12

07
13

07
14

07
15

07
16

07
17

07
18

07
19

07
20

07
21

07
22

07
23

07
24

07
25

07
26

07
27

07
28

07
29

07
30

07
31

07
32

07
33

07
34

07
35

07
36

07
37

07
38

PAGES 07 - 13 WAS INTENTIONALLY LEFT BLANK

ALL RIGHTS RESERVED, DRAWING REMAINS PROPERTY OF BLUEPRINT AUTOMATION

14
01

14
02

14
03

14
04

14
05

14
06

14
07

14
08

14
09

14
10

14
11

14
12

14
13

14
14

14
15


14
16

14
17

14
18

14
19

14
20

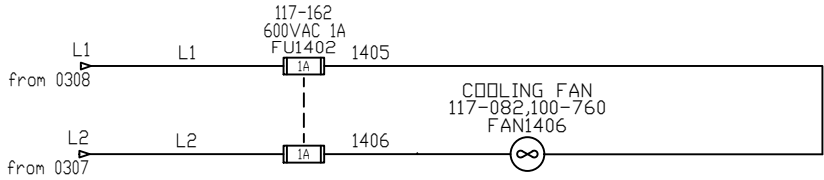

14
21

14
22

14
23

14
24

14
25

14
26

14
27

14
28

14
29

14
30

14
31

14
32

14
33

14
34

14
35


14
36

14
37


14
38

14
39

14
40

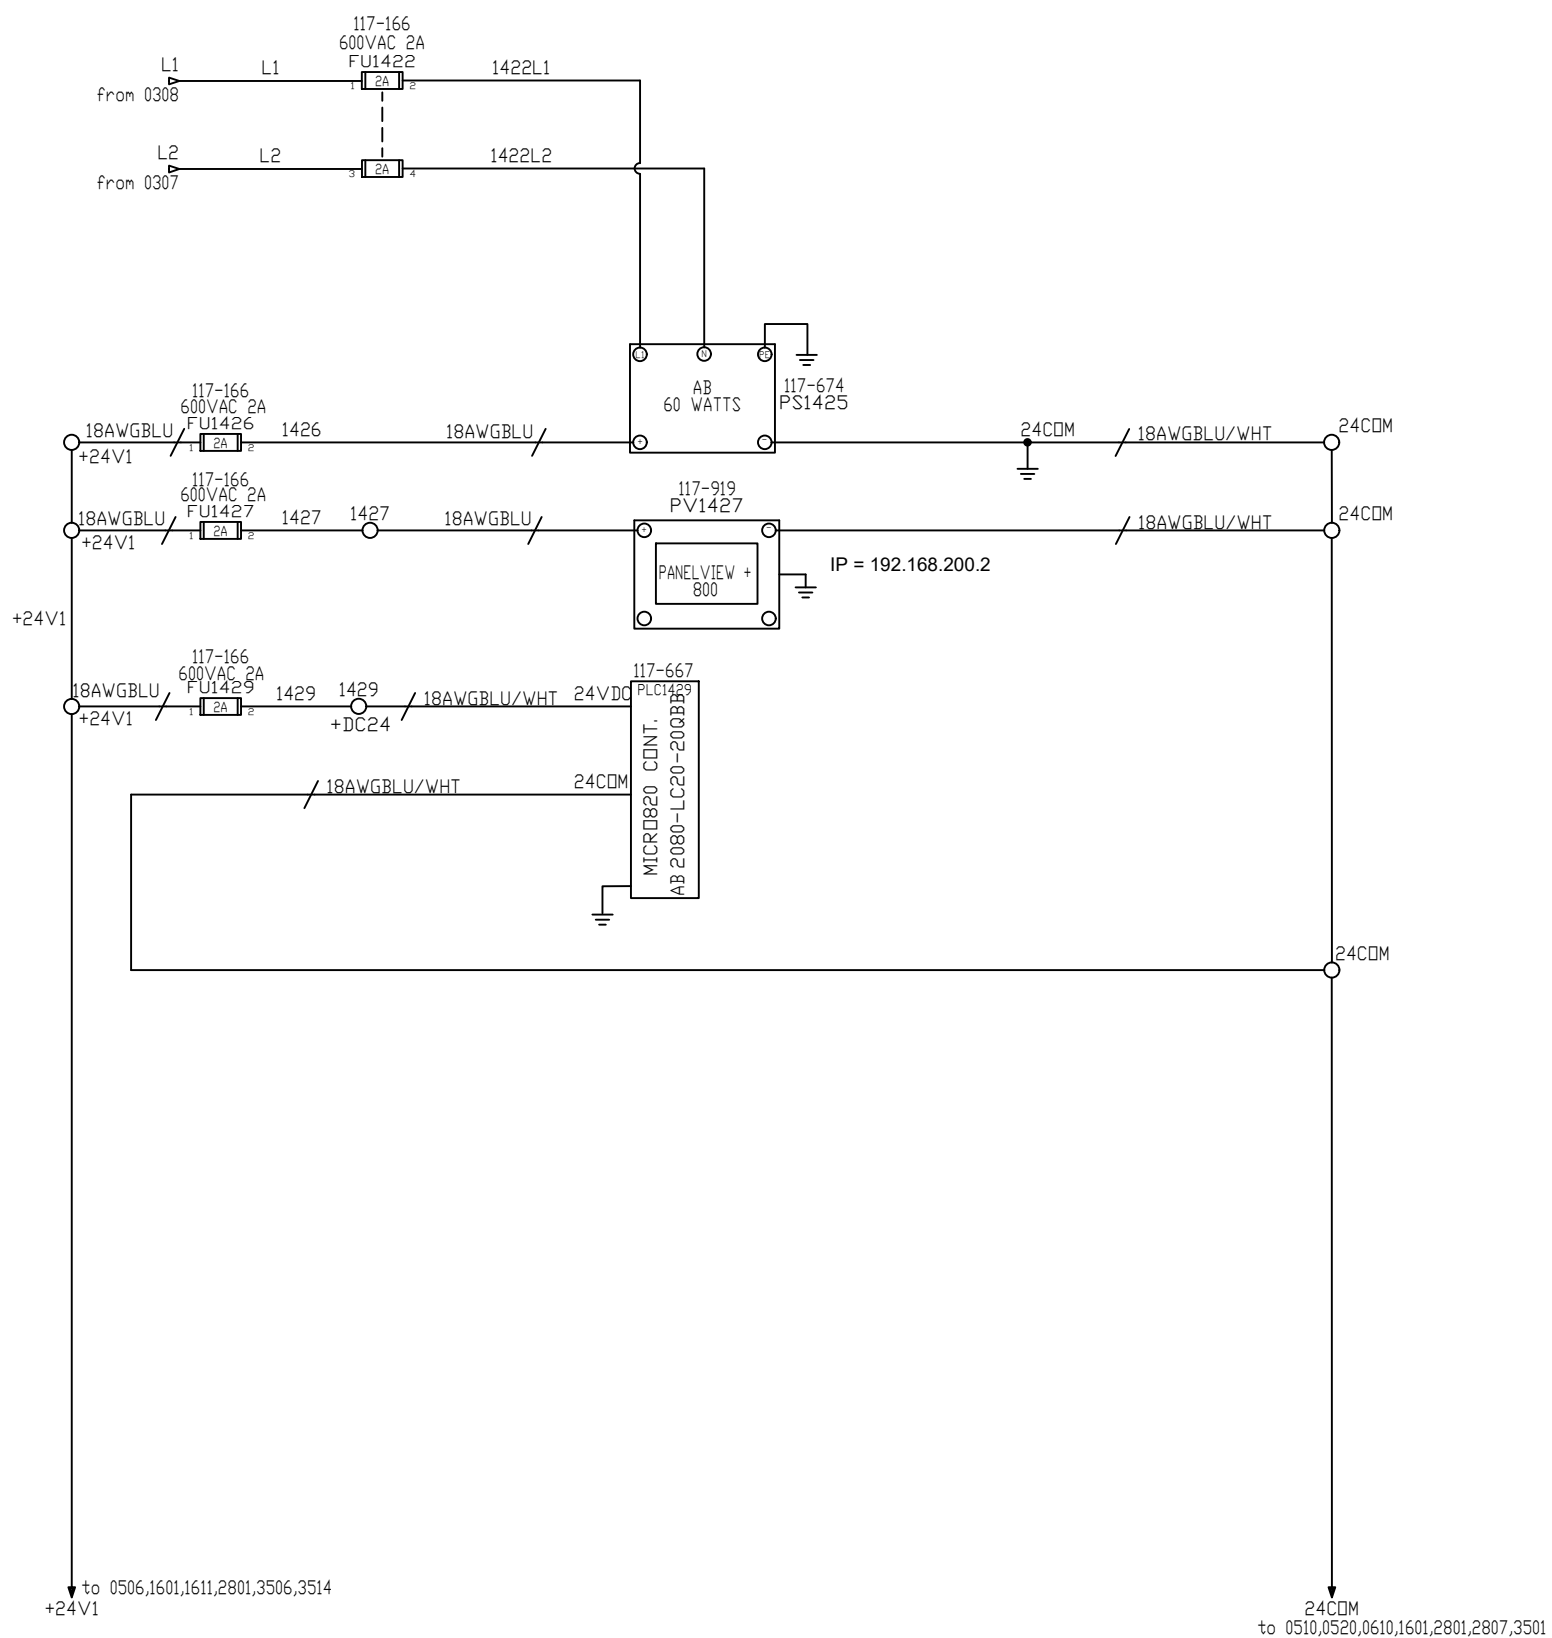

PAGE 15 INTENTIONALLY LEFT BLANK



17
01

17
02

17
03

17
04

17
05

17
06

17
07

17
08

17
09

17
10

17
11

17
12

17
13

17
14

17
15

17
16


17
17

17
18

17
19

17
20

PAGES 17 - 27 WERE INTENTIONALLY LEFT BLANK

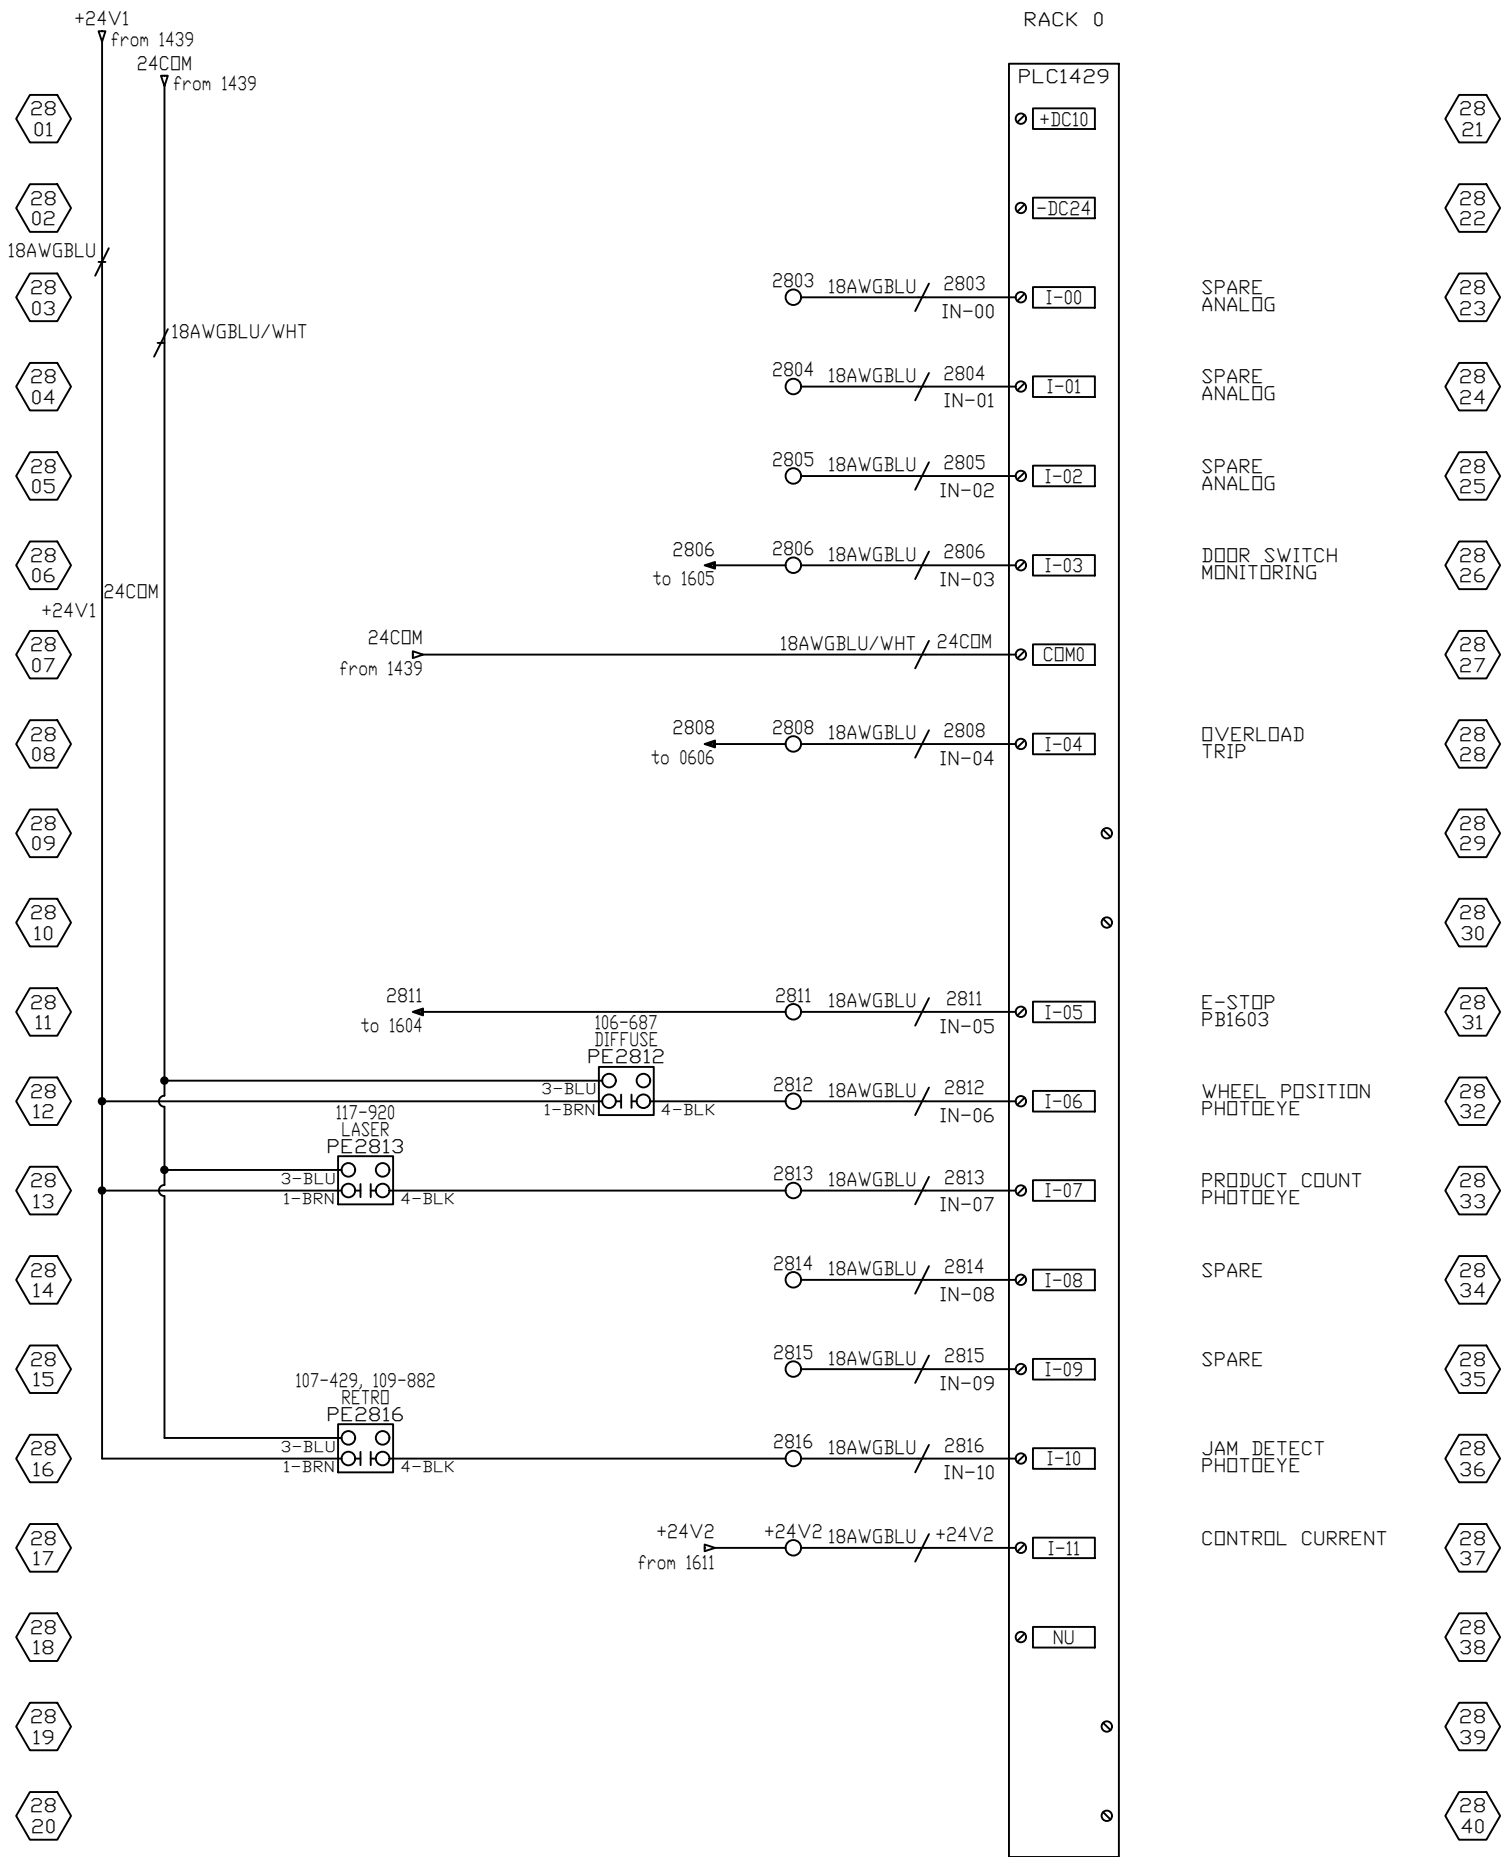

29
01

29
02

29
03

29
04

29
05

29
06

29
07

29
08

29
09

29
10

29
11

29
12

29
13

29
14

29
15

29
16

29
17

29
18

29
19

29
20

29
21

29
22

29
23

29
24

29
25

29
26

29
27

29
28

29
29

29
30

29
31

29
32

29
33

29
34

29
35

29
36


29
37

29
38

29
39

29
40

PAGES 29 - 34 WERE INTENTIONALLY LEFT BLANK

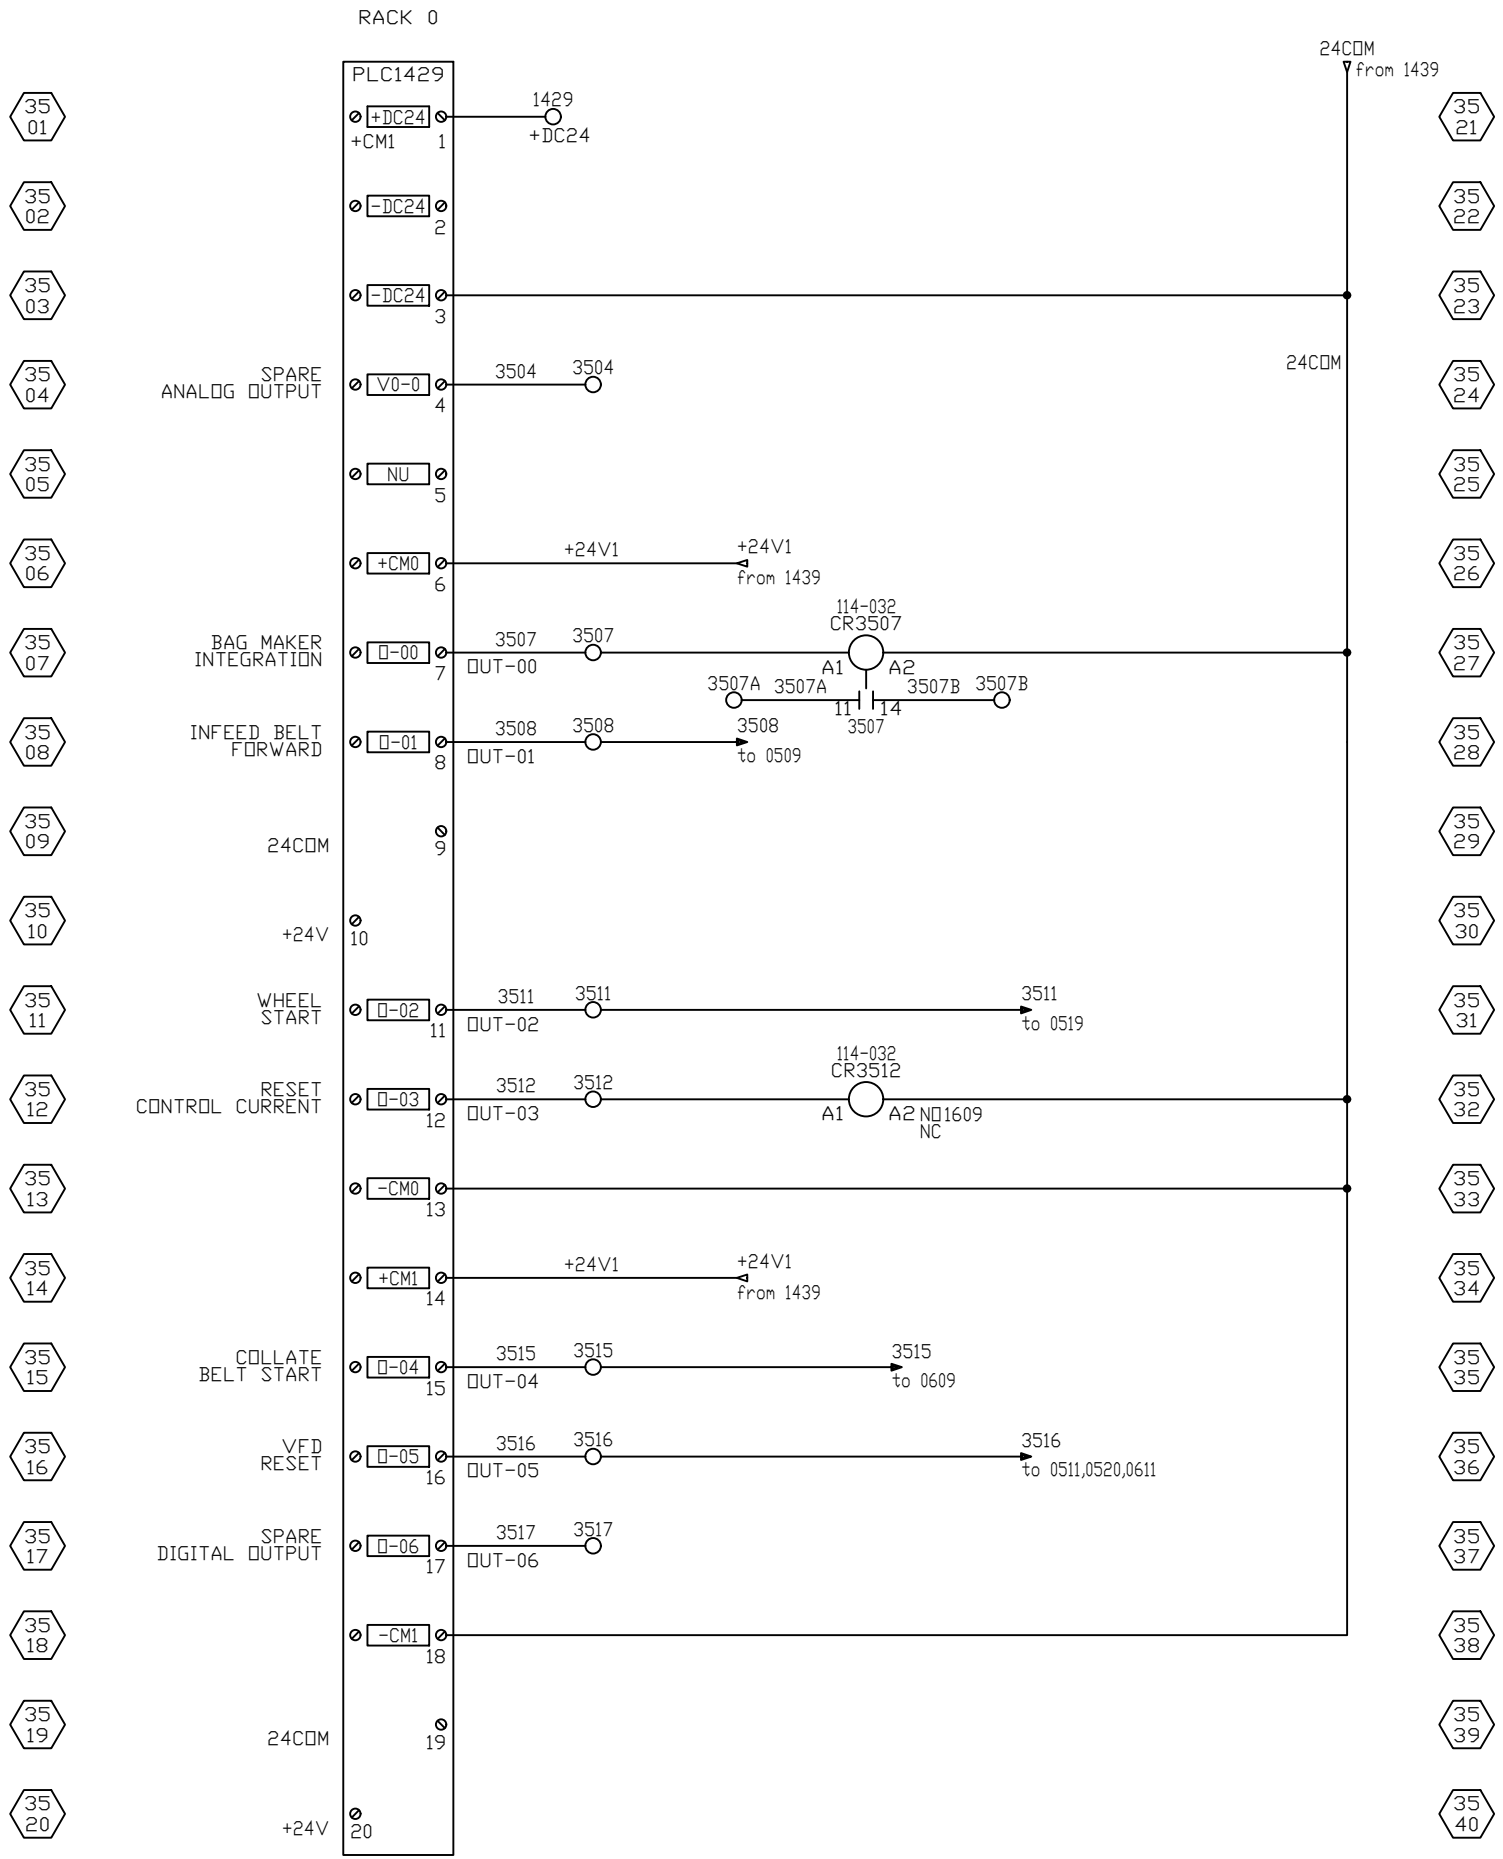

ALL RIGHTS RESERVED, DRAWING REMAINS PROPERTY OF BLUEPRINT AUTOMATION

CUSTOMER NAME	DRAWN BY	DRAWN DATE	CHECKED BY	CHECKED DATE	SCHMATIC #
XXXXXX	SN	8/2017	CE	8/2017	COL-NA-P4M-STD00
MACHINE DESCRIPTION	LOCATION DESCRIPTION	SERIAL #	REV.	PAGE	
Collator			D	35 OF 55	

36
01

36
02

36
03

36
04

36
05

36
06

36
07

36
08

PAGES 36 - 51 WERE INTENTIONALLY LEFT BLANK

36
09

36
10

36
11

36
12

36
13

36
14

36
15

36
16

36
17

36
18

36
19

36
20

36
21

36
22

36
23

36
24

36
25

36
26

36
27

36
28

36
29

36
30

36
31

36
32

36
33

36
34

36
35

36
36


36
37

36
38

36
39

36
40

Communication Network

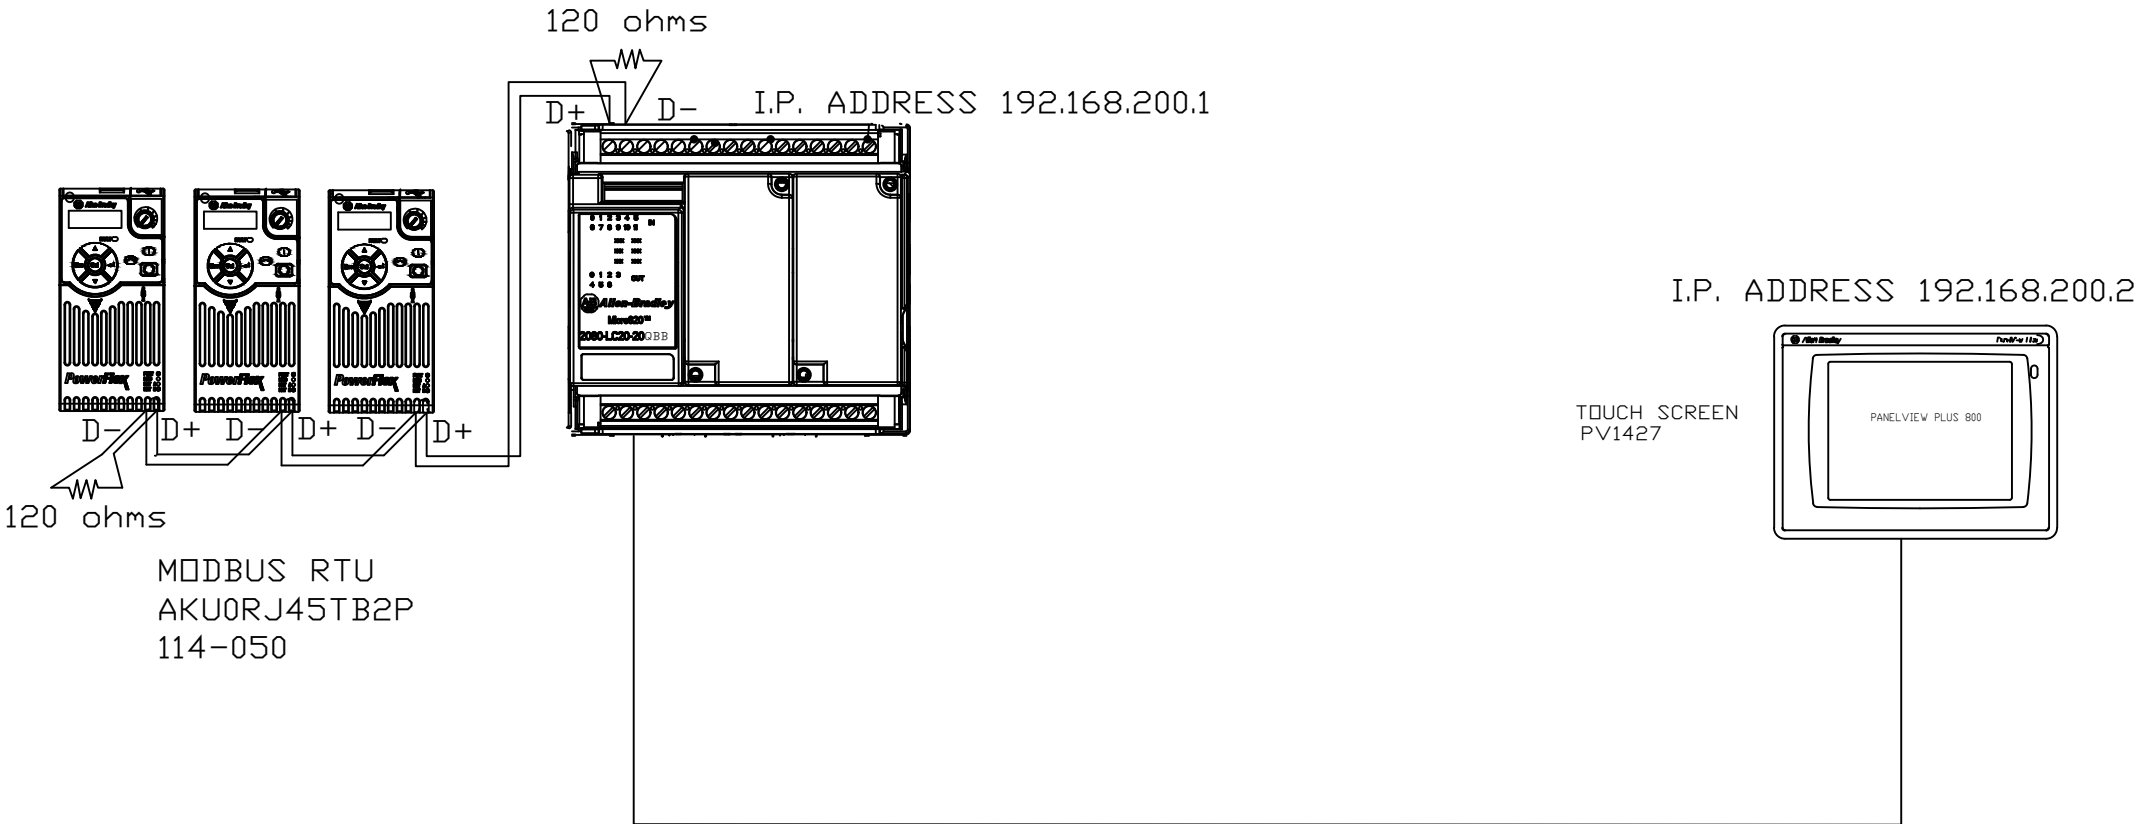

51
01

51
02

51
03

51
04

51
05

51
06

51
07

51
08

51
09

51
10

51
11

51
12

51
13

51
14

51
15

51
16

51
17

51
18

51
19

PAGES 51 - 54 WERE INTENTIONALLY LEFT BLANK

51
20

51
21

51
22

51
23

51
24

51
25

51
26

51
27

51
28

51
29

51
30

51
31

51
32

51
33

51
34

51
35

51
36

51
37

51
38

Electrical Power Component Torque Specifications

Mfg	Mfg Number	Description	Torque (Nm)	Torque (lb-in)
AB	194RF-NC030R* 194RF-NJ030R* 194RF-NN030R* 194R-NA100P3 194R-NA200P3	Disconnect, Rotary, 30A	1.4Nm	12 lb-in
AB	194RF-NJ060R* 194RF-NN060R* 194RF-NA300P3	Disconnect, Rotary, 60A	4.0Nm	35lb-in
AB	100S-C30DJ22C	Contactor, Safety	1.5-3.5Nm	13-31lb-in
AB	1492-PD3C141	Distribution Block, 3 Phase	none provided	
AB	140MCWTE	Terminal, 3Phase Feeder	3.0-3.5Nm	27-31lb-in
AB	140MC2EB63	Motor Starter, 4.0-6.3A	2.0-2.5Nm	18-22lb-in
AB	140MC2EB25	Motor Starter, 1.6-2.5A	2.0-2.5Nm	18-22lb-in
AB	140MC2EB16	Motor Starter, 1.0-1.6A	2.0-2.5Nm	18-22lb-in
AB	140MC2EB10	Motor Starter, 0.63-1.0A	2.0-2.5Nm	18-22lb-in
AB	100C12UZJ10	Contactor, Motor	1.0-2.5Nm	8.9-22lb-in
Mennekes	20MS1A-M2	Disconnect, Rotary, Non-Fused, 25A	none provided	
AB	22AD2P3N104	Drive, Inverter, PowerFlex 4M	1.7-2.2Nm	14-20lb-in
AB	22BD2P3N104	Drive, Inverter, PowerFlex 525	1.7-2.2Nm	14-20lb-in
ACME	T-2A-53340-1S	Transformer, 3 Phase, 480/240	none provided	
AB	2094-BC01-M01-S	Drive, Servo, Kinetix 6000	2.26Nm	20lb-in
Micron	B750BTZ13JK	Transformer, 1 Phase,	none provided	
Weidmuller	991549	Receptacle	none provided	
Hoffman	T-FP41	Cooling Fan	none provided	
AB	1769-PA4	Power Supply, Compact Logix, 4A	1.27Nm	11.24lb-in
AB	1606-XL240E	Power Supply, 240VAC to 24VDC	0.8Nm	7.0lb-in
Mersen	USCC1I	Fuse Holder, 1 Pole, Class CC	1.7Nm	14lb-in
Mersen	USCC2I	Fuse Holder, 2 Pole, Class CC	1.7Nm	14lb-in
Mersen	USCC3I	Fuse Holder, 3 Pole, Class CC	1.7Nm	14lb-in

ALL RIGHTS RESERVED, DRAWING REMAINS PROPERTY OF BLUEPRINT AUTOMATION