


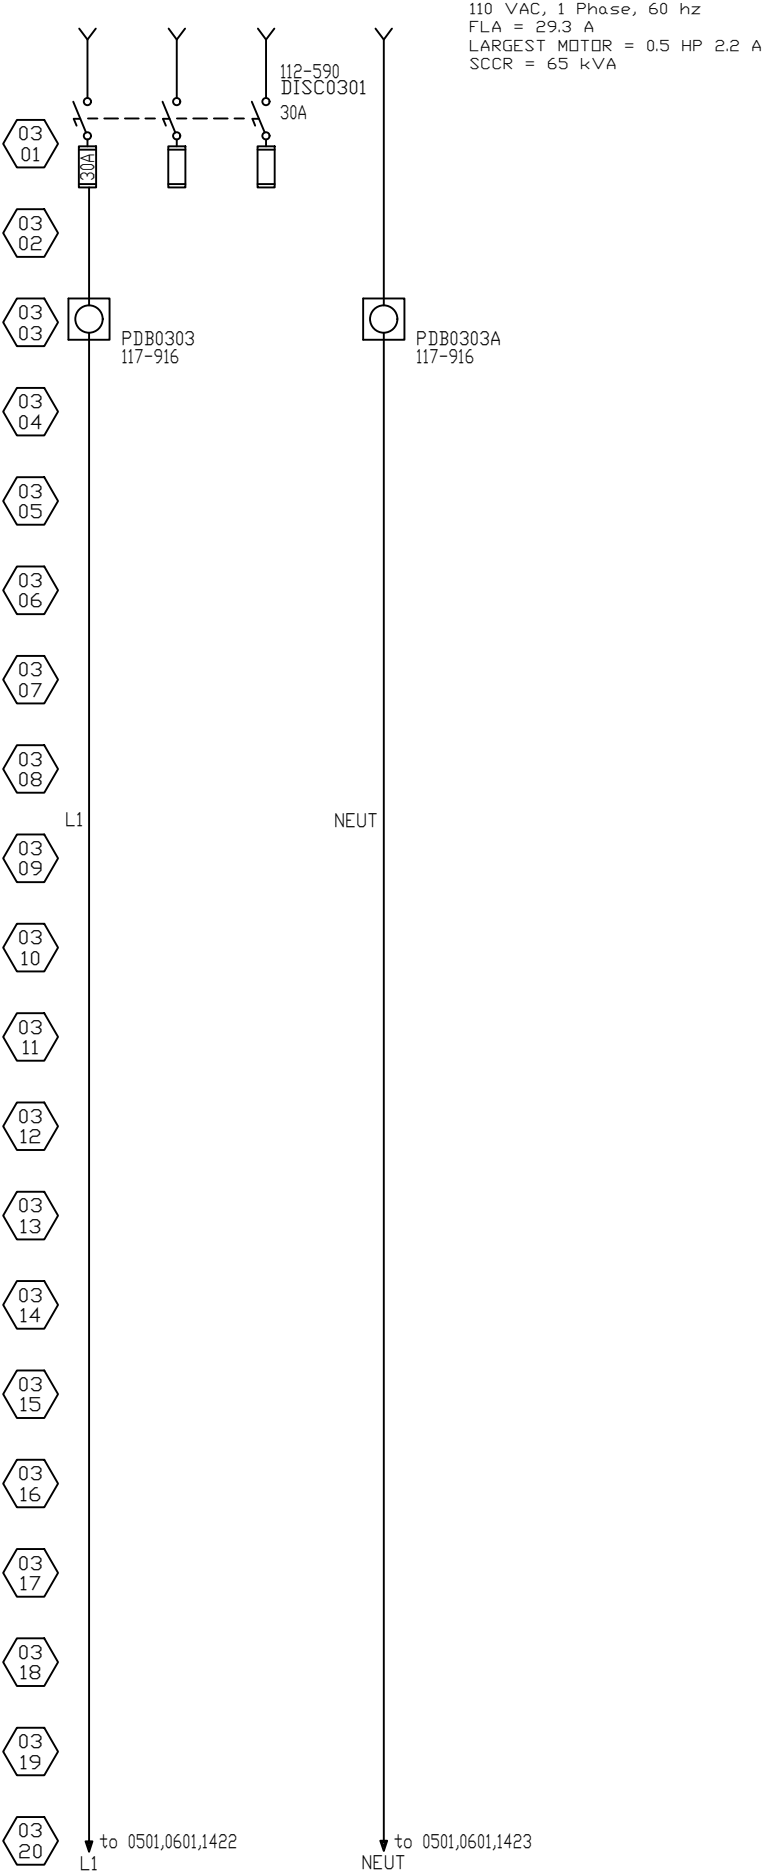

- 03 21
- 03 22
- 03 23
- 03 24
- 03 25
- 03 26
- 03 27
- 03 28
- 03 29
- 03 30
- 03 31
- 03 32
- 03 33
- 03 34
- 03 35
- 03 36
- 03 37
- 03 38
- 03 39
- 03 40

04  
01

04  
02

04  
03

04  
04

04  
05

04  
06

04  
07

04  
08

04  
09

04  
10

04  
11

04  
12

04  
13

04  
14

04  
15

04  
16

04  
17

04  
18

04  
19

PAGE 04 INTENTIONALLY LEFT BLANK

04  
20

04  
21

04  
22

04  
23

04  
24

04  
25

04  
26

04  
27

04  
28

04  
29

04  
30

04  
31

04  
32

04  
33

04  
34


04  
35

04  
36

04  
37

04  
38

NOTE: ON ALL VFD'S USE SILFLEX MOTOR CABLE RATED FOR VFDS, P/N A1161404 SHIELDED. GROUND SHIELD AT VFD AND MOTOR.

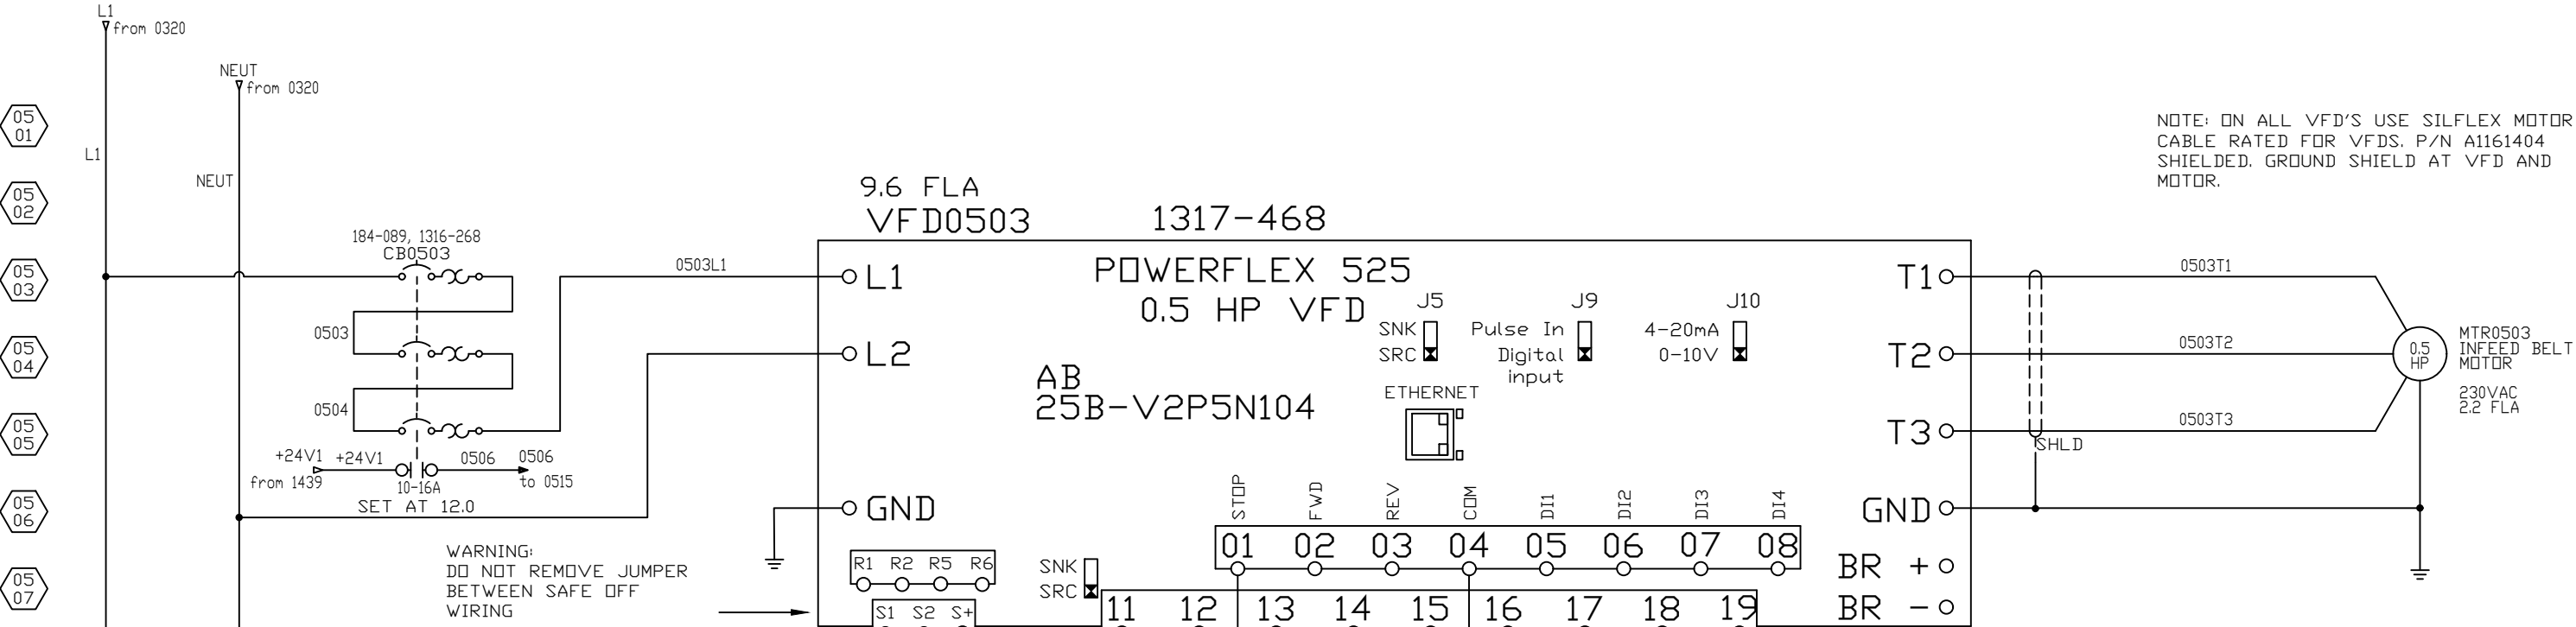


DRIVE PRESETS Powerflex 525

ALL PARAMETERS ARE DEFAULT EXCEPT THE FOLLOWING

|      |                  |   |     |
|------|------------------|---|-----|
| P031 | MTR NP VOLTS     | = | 230 |
| P032 | MTR NP HERTZ     | = | 60  |
| P033 | CURRENT OVERLOAD | = | 2.2 |
| P034 | MTR NP FLA       | = | 2.2 |
| P035 | MTR NP POLES     | = |     |
| P036 | MTR NP RPM       | = |     |
| P037 | MTR NP POWER     | = |     |
| P041 | ACCEL 1          | = | 0.1 |
| P042 | DECEL 1          | = | 0.1 |
| P044 | MAX FREQ         | = | 90  |
| P045 | DC BRAKE         | = | 6   |
| P046 | START SOURCE     | = | 5   |
| P047 | SPEED REF.       | = | 15  |

|        |                  |   |                 |
|--------|------------------|---|-----------------|
| C125   | Comm Loss        | = | 0               |
| C128   | Addr Sel         | = | 1               |
| C129   | IP Addr Cfg1     | = | 192             |
| C130   | IP Addr Cfg 2    | = | 168             |
| C131   | IP Addr Cfg 3    | = | 200             |
| C132   | IP Addr Cfg 4    | = | 10              |
| C133   | SubNet Cfg1      | = | 255             |
| C134   | SubNet Cfg2      | = | 255             |
| C135   | SubNet Cfg3      | = | 255             |
| C136   | SubNet Cfg4      | = | 0               |
| C141   | Rate Cfg         | = | 0 (AUTO DETECT) |
| C143   | EN Comm Flt Actn | = | 1 (STOP)        |
| C144   | EN Idle Flt Actn | = | 1 (STOP)        |
| A434DC | Brake Time       | = | .2 sec          |
| A435DC | Brake Level      | = | 3.8 amps        |

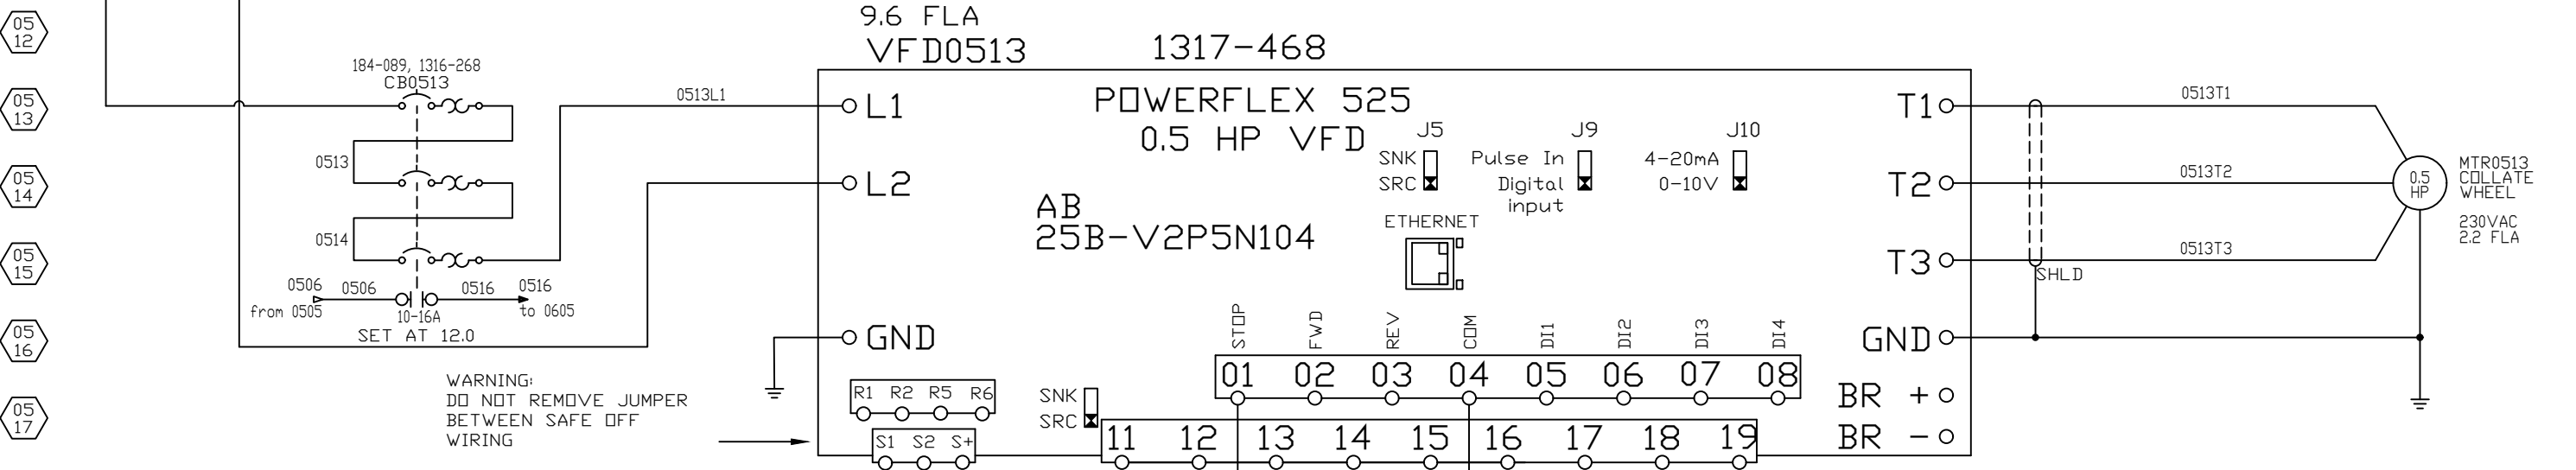

DRIVE PRESETS Powerflex 525

ALL PARAMETERS ARE DEFAULT EXCEPT THE FOLLOWING

|      |                  |   |     |
|------|------------------|---|-----|
| P031 | MTR NP VOLTS     | = | 230 |
| P032 | MTR NP HERTZ     | = | 60  |
| P033 | CURRENT OVERLOAD | = | 2.2 |
| P034 | MTR NP FLA       | = | 2.2 |
| P035 | MTR NP POLES     | = |     |
| P036 | MTR NP RPM       | = |     |
| P037 | MTR NP POWER     | = |     |
| P041 | ACCEL 1          | = | 0.1 |
| P042 | DECEL 1          | = | 0.1 |
| P044 | MAX FREQ         | = | 90  |
| P045 | DC BRAKE         | = | 6   |
| P046 | START SOURCE     | = | 5   |
| P047 | SPEED REF.       | = | 15  |

|        |                  |   |                 |
|--------|------------------|---|-----------------|
| C125   | Comm Loss        | = | 0               |
| C128   | Addr Sel         | = | 1               |
| C129   | IP Addr Cfg1     | = | 192             |
| C130   | IP Addr Cfg 2    | = | 168             |
| C131   | IP Addr Cfg 3    | = | 200             |
| C132   | IP Addr Cfg 4    | = | 11              |
| C133   | SubNet Cfg1      | = | 255             |
| C134   | SubNet Cfg2      | = | 255             |
| C135   | SubNet Cfg3      | = | 255             |
| C136   | SubNet Cfg4      | = | 0               |
| C141   | Rate Cfg         | = | 0 (AUTO DETECT) |
| C143   | EN Comm Flt Actn | = | 1 (STOP)        |
| C144   | EN Idle Flt Actn | = | 1 (STOP)        |
| A434DC | Brake Time       | = | .2 sec          |
| A435DC | Brake Level      | = | 3.8 amps        |



|                     |          |                      |    |            |         |            |    |              |         |             |                     |
|---------------------|----------|----------------------|----|------------|---------|------------|----|--------------|---------|-------------|---------------------|
| CUSTOMER NAME       | XXXXXX   | DRAWN BY             | JN | DRAWN DATE | 10/2022 | CHECKED BY | SN | CHECKED DATE | 10/2022 | SCHEMATIC # | COL-NA-P525NA-STD00 |
| MACHINE DESCRIPTION | Collator | LOCATION DESCRIPTION |    | SERIAL #   |         | REV.       | B  | PAGE         | 05      | OF          | 55                  |

ALL RIGHTS RESERVED, DRAWING REMAINS PROPERTY OF BLUEPRINT AUTOMATION

06  
01  
06  
02  
06  
03  
06  
04  
06  
05  
06  
06  
06  
07  
06  
08  
06  
09  
06  
10  
06  
11  
06  
12  
06  
13  
06  
14  
06  
15  
06  
16  
06  
17  
06  
18  
06  
19  
06  
20

