

ADJUSTMENTS

NOTE: BEFORE WORKING, CLEANING OR MAINTAINING THE EQUIPMENT, IT IS HIGHLY IMPORTANT TO LOCK OUT ALL OF THE ENERGY SOURCES ACCORDING TO OSHA (OR LOCAL SAFETY) REGULATIONS. ONLY PEOPLE WITH THE PROPER QUALIFICATIONS, TRAINING, AND AUTHORITY FROM THE MANAGEMENT SHALL WORK OR MAINTAIN THIS EQUIPMENT.

BEFORE ATTEMPTING TO DO ANY WORK, CLEANING OR MAINTAINING THE EQUIPMENT, BE CERTAIN TO SHUT THE POWER OFF BY SWITCHING THE MAIN POWER SUPPLY CIRCUIT BREAKER TO THE OFF POSITION. THE MAIN DISCONNECT SWITCH MUST THEN BE LOCKED OUT AND TAGGED ACCORDING TO OSHA (OR LOCAL SAFETY) REGULATIONS. ONLY PEOPLE WITH THE PROPER QUALIFICATIONS, TRAINING, AND AUTHORITY FROM THE MANAGEMENT SHALL WORK OR MAINTAIN THIS EQUIPMENT.

CONVEYOR TENSIONING

Remove all side access covers. Loosen the idlers to ease chain tension nuts. Tighten each belt conveyor section, or tier, only slightly. Tension-up or tighten belt by loosening tension screw-bar nut, (as mentioned before), and tightening tension screw-bar by turning in a clock-wise direction.

Assure that the belt is tracking straight because of balanced tension, and not being forced by the belt sprockets, which would wear more quickly. After tension adjust, tighten flange bolts, lock nuts, and idlers, do not overly tighten tension.



BEFORE ATTEMPTING TO DO ANY WORK, CLEANING OR MAINTAINING THE EQUIPMENT, BE CERTAIN TO SHUT THE POWER OFF BY SWITCHING THE MAIN POWER SUPPLY CIRCUIT BREAKER TO THE OFF POSITION. THE MAIN DISCONNECT SWITCH MUST THEN BE LOCKED OUT AND TAGGED ACCORDING TO OSHA (OR LOCAL SAFETY) REGULATIONS. ONLY PEOPLE WITH THE PROPER QUALIFICATIONS, TRAINING, AND AUTHORITY FROM THE MANAGEMENT SHALL WORK OR MAINTAIN THIS EQUIPMENT.

ADJUSTING FRYER PADDLE DRUM HEIGHT

1. With the Fryer conveyor down in run position, check the gap between the Tostada drum and the bottom of the fryer kettle. There should be a 2.500" gap between the flights and the kettle bed. (See Fig. A)

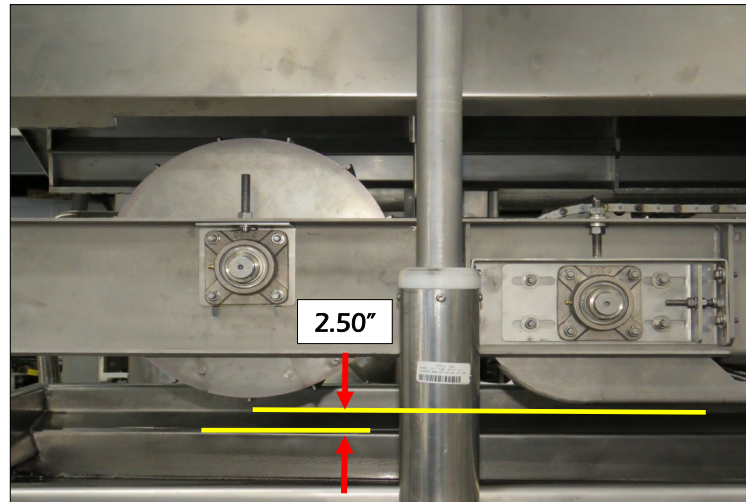


Fig. A

2. If adjustments are needed, raise the fryer hood, loosen the four bolts on the bearings and then raise or lower the nuts on the top of the bearing mounts. Secure the nuts after adjustments are made or they may fall into the fryer oil (See Fig. B and C)

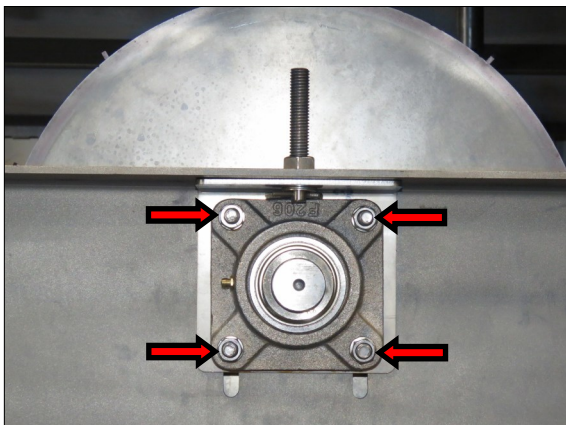


Fig. B

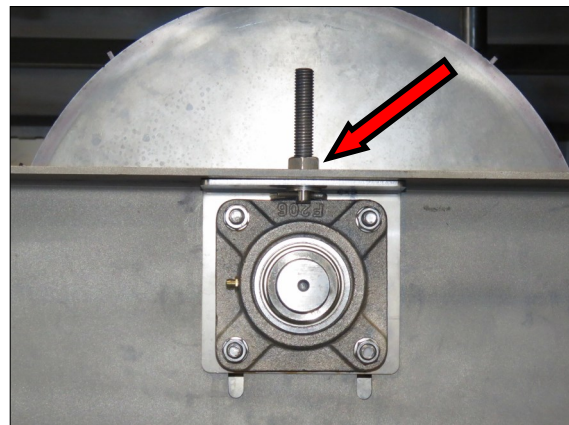


Fig. C

BEFORE ATTEMPTING TO DO ANY WORK, CLEANING OR MAINTAINING THE EQUIPMENT, BE CERTAIN TO SHUT THE POWER OFF BY SWITCHING THE MAIN POWER SUPPLY CIRCUIT BREAKER TO THE OFF POSITION. THE MAIN DISCONNECT SWITCH MUST THEN BE LOCKED OUT AND TAGGED ACCORDING TO OSHA (OR LOCAL SAFETY) REGULATIONS. ONLY PEOPLE WITH THE PROPER QUALIFICATIONS, TRAINING, AND AUTHORITY FROM THE MANAGEMENT SHALL WORK OR MAINTAIN THIS EQUIPMENT.

ADJUSTING FRYER PADDLE DRUM HEIGHT

3. Raise the hood and conveyor frame up to have access to the submerger belt carrier rails. *(See Fig. D)*



Fig. D

3. The Submerger belt should be adjusted to 1" higher than the tostada drum. The bottom of the submerger mesh should be 3" from the kettle bed to the bottom of the mesh chain. The submerger belt should be level front to back and left to right. *(See Fig. E)*

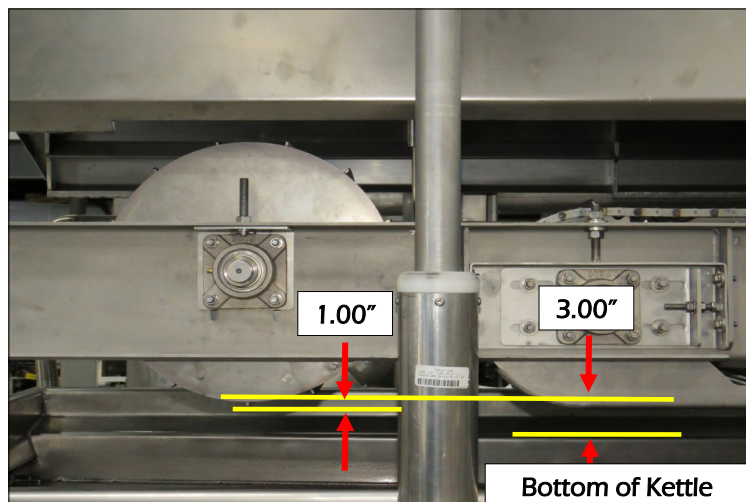


Fig. E