

1 SAFETY

1.1 Summary

This chapter describes the proper use of the warning terms, precautions, and warning labels that are attached to the device. The warning terms must be observed by the owners and personnel who install, operate, maintain, and inspect this device.



- **When installing, operating, maintaining, and inspecting the device, always follow the instructions and warnings found within this manual.**
 - **When there are any questions or when anything is unclear, contact the distributor or Ishida customer support staff. Do not proceed with any operations until the required instructions are given.**
-

<Contents>

- Warning labels and their attached locations
- Precautions for the operation of the device
- Proper use of the warning terms

<Purpose>

- To ensure that the safety maintenance and hazardous areas protocols are thoroughly understood by the personnel dealing with this device.

<Intended reader>

- Owner of this device
- All users

1.2 Warning Terms and Meaning

In case the warning indications shown in the instruction manual and the warning labels attached on the device unit are not followed, degree of danger (or scale of accidents) is divided into the following three levels.

Understand the meaning of the warning terms, and follow the contents (instructions) of this manual.

Table 1-1

Warning Terms	Description
 DANGER	Used for imminent hazardous conditions that could cause death or serious injury, if they are not avoided.
 WARNING	Used for hazardous conditions that could cause death or serious injury, if they are not avoided.
 CAUTION	Used for hazardous conditions that could cause light or moderate injury, or damage equipment or devices, if they are not avoided.

1.3 General Precautions

To prevent hazards to person and damage to properties, items described in this chapter must be strictly observed.

In addition, notes which are specific to this equipment as described in section "1.4 Special Precautions" must be strictly observed.

< Safety precautions regarding equipment installation >

Table 1-2

Degree of hazards	Possible hazards and its prevention methods
 DANGER	Electrical wiring work must be performed by a legally qualified person. Electrical wiring work on the equipment must be performed by a legally qualified person. It is the violation of applicable laws and regulations for a person who is not legally qualified to perform electrical wiring work of the equipment. Faulty electrical wiring work may cause fire, electric shock, ground leakage, etc.
 DANGER	Ground the equipment. The equipment must be connected to protective ground. Securely connect the equipment to protective ground by having a legally qualified person perform the electrical wiring work. Improper grounding may result in an electric shock
 DANGER	Connect the equipment to a power supply with the voltage and frequency as indicated in the specifications and on the device plate. Connecting to a power supply with different voltage or frequency may result in equipment malfunction.
 DANGER	Avoid multiple-tap connection to a single outlet for power supply cable and other cables. Otherwise it may cause burning or start a fire.
 DANGER	Do not pour water on the equipment. Do not install the equipment at a location exposed to moisture or condensation. Except for water-resistant equipment, exposing to water will result in loss of performance, reduction in functions, equipment failure, or electric shock.
 DANGER	Install the equipment at a solid and level location. Installing the equipment at an unstable or tilting location may cause loss of performance, functions, or roll-over of the equipment, resulting in injury.

Table 1-2

Degree of hazards	Possible hazards and its prevention methods
 WARNING	Install the equipment with sufficient distance maintained from other electronic devices. Otherwise malfunction of the equipment or other electronic devices may occur.
 WARNING	Maintain necessary space for operation and maintenance. Otherwise an operational error or injury may occur.

< Safety precautions regarding equipment operation >

Table 1-3

Degree of hazards	Possible hazards and its prevention methods
 DANGER	Do not touch the equipment with wet hand. Doing so may result in electric shock.
 DANGER	Do not step on or pull wet or damaged cables of the equipment. Doing so may result in electric shock, fire, or injury.
 DANGER	Do not try to disassemble, repair, or modify the equipment. Do not try to disassemble, repair, or modify the equipment with tools such as screwdriver or spanner unless indicated in the instruction manual. Doing so may result in electric shock, fire or injury. All repairing the device can be performed by Ishida service department. Contact the distributor or Ishida Customer Support.
 DANGER	Be sure to check that there is no damaged parts or missing parts before starting operation. Otherwise parts fragment may become mixed into a product handled by the equipment, resulting in a foreign matter contamination accident. Electric shock, fire or injury may result.
 DANGER	Start operation after checking that nothing is placed on the equipment. The object placed on the equipment may become mixed together with product handled by the equipment, resulting in a foreign matter contamination accident. Electric shock, fire or injury may result.

Table 1-3

Degree of hazards	Possible hazards and its prevention methods
 DANGER	Operate the equipment with all the covers and doors closed. Otherwise may result in loss of performance, reduction in functions, or injury.
 DANGER	Do not insert your hand or finger in the gap of the cover or door of the equipment. Doing so may result in loss of performance, reduction in functions, or injury.
 DANGER	Conduct maintenance and cleaning of the equipment. Make sure to conduct maintenance and cleaning of the equipment according to the instruction manual. Not doing so may result in loss of required hygienic level of foods handled by the equipment.
 WARNING	The equipment must be operated by a person who has read and understood the instructions in the manual. Make sure to fully understand precautions, methods on operation and maintenance according to the instruction manual before operating the equipment. Otherwise electric shock, injury, fire, damage to the equipment or food poisoning caused by foods handled by the equipment, may occur.
 WARNING	Operate the equipment with appropriate clothes. Be sure to fasten or zip up any fasteners on the clothes. Put on non-slip shoes and tightly tie the shoe laces. Remove any accessories that you are wearing. Remove tie and strap, or fasten them tightly with a clip. Cover your hair entirely with a hat or hair cap. Disregarding the above instructions may result in hair or fibers mixed into the product handled by the equipment and cause a foreign matter contamination accident. In addition, it may result in an injury caused by entanglement of foreign matter in the equipment.
 WARNING	Make sure that there is no other person around the equipment before operating the equipment. Injury may occur when trying to operate the equipment suddenly while other person is near the equipment.
 WARNING	Do not touch the operating parts of the equipment unless indicated in the instruction manual. Doing so may result in loss of performance, reduction in functions, or injury.
 WARNING	Use fingers to operate the control panel. Operating the control panel with other than fingers may result in damage of the control panel.
 WARNING	Do not ride on, lean against, or sit on the equipment. Doing so may result in loss of performance, reduction in functions, or injury.

Table 1-3

Degree of hazards	Possible hazards and its prevention methods
 WARNING	Use a stool or step ladder in accordance with its instruction manual and as indicated. When using a stool or step ladder, make sure to follow the instructions in the manual as indicated. Otherwise it may result in injury.
 WARNING	Be sure to wait at least 5 minutes after turning off the power supply before conducting maintenance or inspection of the equipment. Otherwise may result in electric shock.
 WARNING	Do not conduct any maintenance or inspection that is not described in the instruction manual. Doing so may result in electric shock, fire or injury.
 WARNING	Do not turn off the main power supply switch during operation except in emergency. Turning off the main power switch of the equipment during operation may delete the configuration and summary data.

1.4 Special Precautions

This section describes special safety precautions for this equipment which, in addition to the previously mentioned precautions, should be carefully observed.

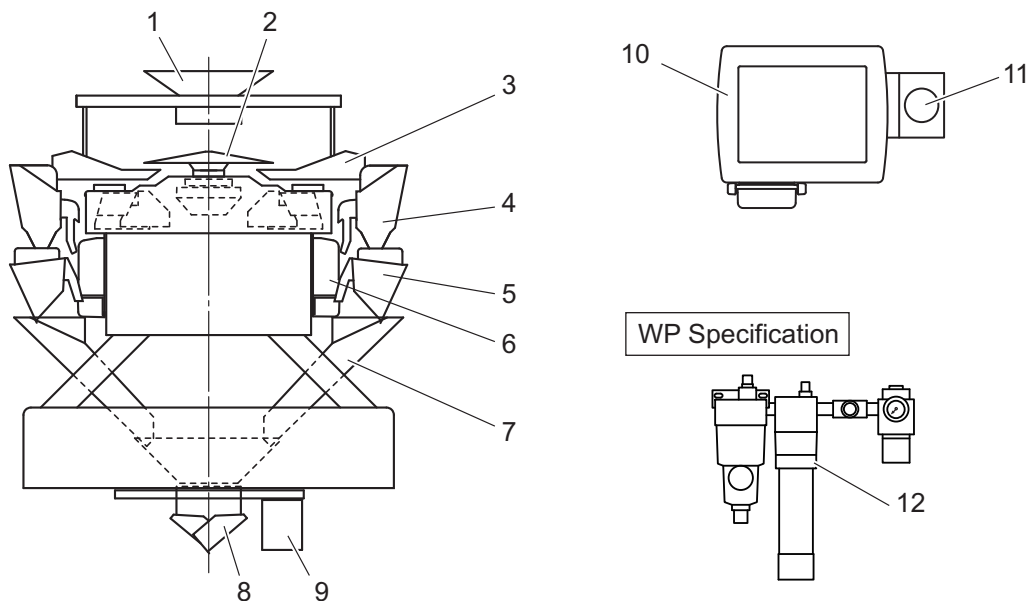


Fig. 1-1

Table 1-4

Degree of hazards	Possible hazards and its prevention methods	Fig. No.	Chapter
 WARNING	When cleaning the device, the operator must turn OFF and lock the main power switch and keep the key in his possession during the work. This is to prevent other personnel from starting the device, which may result in an electrical shock or injury.	11	"1.6"
 WARNING	Do not place your hand close to the hopper during operation. Doing so may result in your hands getting entangled in the gate, linkage, or lever.	4, 5, 6, 8, 9	—
 WARNING	Be sure to install the Remote Control Unit at a location that gives sufficient work space to the operator and does not pose a danger to the operator. Otherwise operator may be injured.	10	—
 CAUTION	Do not share the power source with other devices that may emit noises. Otherwise may result in malfunction or failure to the equipment.	—	—
 CAUTION	Do not place any foreign matter such as insecticide or liquid inside the protected portions including the device main body, terminal boxes, and motor boxes. Doing so may result in malfunction or failure to the equipment.	—	—

Table 1-4

Degree of hazards	Possible hazards and its prevention methods	Fig. No.	Chapter
 CAUTION	Do not apply an excessive load to the weigh hopper. Doing so may damage the weighing device.	5	—
 CAUTION	Route the wiring in the way that power voltage fluctuation due to load change does not exceed $\pm 10\%$. Otherwise may result in malfunction or failure to the equipment.	—	—
 CAUTION	Depending on food materials such as raw meat and cut vegetables, the risk of hygienic hazards may be increased through the usage of the device. Clean the device in a suitable manner for product type and processing methods. For cleaning methods, read and thoroughly understand Chapter 9 and follow the instructions.	1, 2, 3, 4, 5, 7, 8	"9"
 CAUTION	When the specification of your machine is WP (splash proof), do not turn off the pneumatic supply. This maintains the supply of dry air to the main body of the machine. Otherwise may cause condensation and corrosion.	12	—
 CAUTION	Use the specified USB. Other USB cannot be used.	13	"5","6"

1.5 Warning Label

Warning labels are attached at the locations that require special cautions. Take sufficient time to familiarize yourself with the detailed locations and precaution details of these labels.

1.5.1 Warning Label Handling

Check if all the warning labels are legible. If any letters or illustrations are unclear, clean or replace such labels.

Clean the warning labels using a cloth, water, and neutral detergent.
Do not use organic solvents or gasoline.

If the warning labels are damaged, lost, or illegible, replace the labels.
Check the machine type (model) and machine identification, and contact the distributor or Ishida customer support.

1.5.2 Attached Locations of Warning Labels

The locations of attached warning labels are shown in "Fig. 1-2".

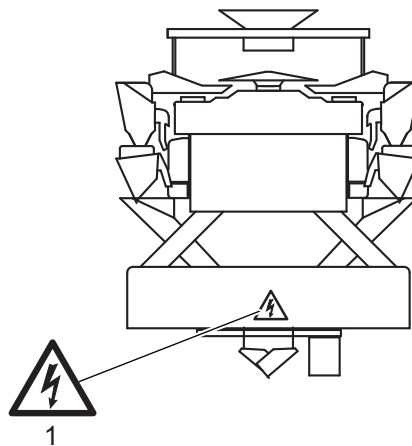


Fig. 1-2

Table 1-5

No.	Attached Location	Precaution Detail
1	Front and back of the device	Electrical shock

1.6 Power Supply Shut Off and Indication

This section describes the power supply shut off and its indication.

⚠ WARNING

- **Before performing maintenance and inspections, shut off the power supply in order to secure operator safety.**
- **Note that even if the main power switch is turned to the OFF position, the main body circuit to the main power switch is on.**

The following is recommended in order to prevent other operators from turning on the power supply during the work:

- Lock the power switch in the OFF position.
- Create an accident prevention tag and place it at the power shut-off location.

For the placement of a main power switch lock and accident prevention tag, refer to the following.

NOTE

- A main power switch lock and accident prevention tag are to be prepared by customers.

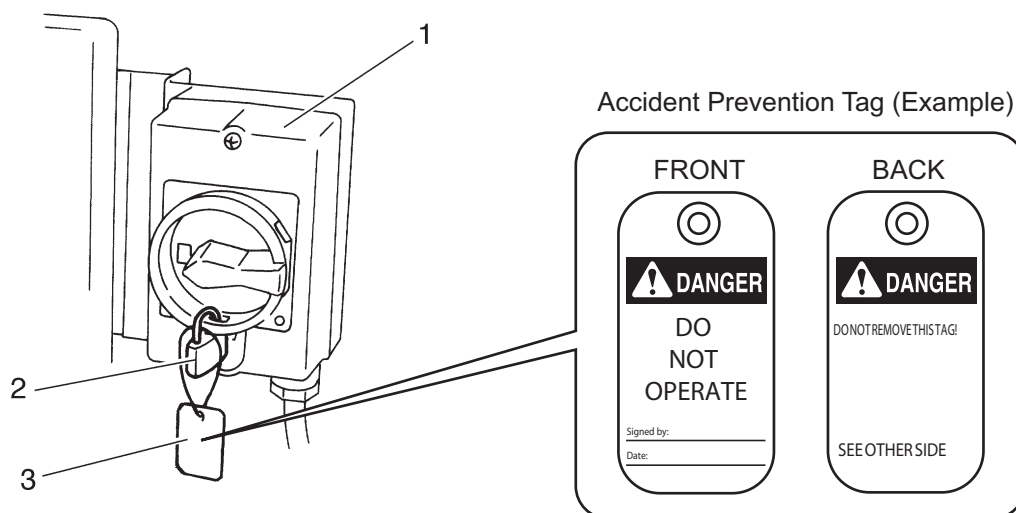


Fig. 1-3

Table 1-6

No.	Name
1	Main power switch
2	Lock
3	Accident prevention tag