



11.2.2 Electrical diagram



MACHINE: MULTI BAG G

SERIAL NUMBER: 24024140

CLIENT: ARTESANO


PROJECT: MATHEUS


DATE: 29/04/2024

REVISION 1


VOLTAGE: 208V FREQUENCY: 60Hz


POWER: 8,0kVA

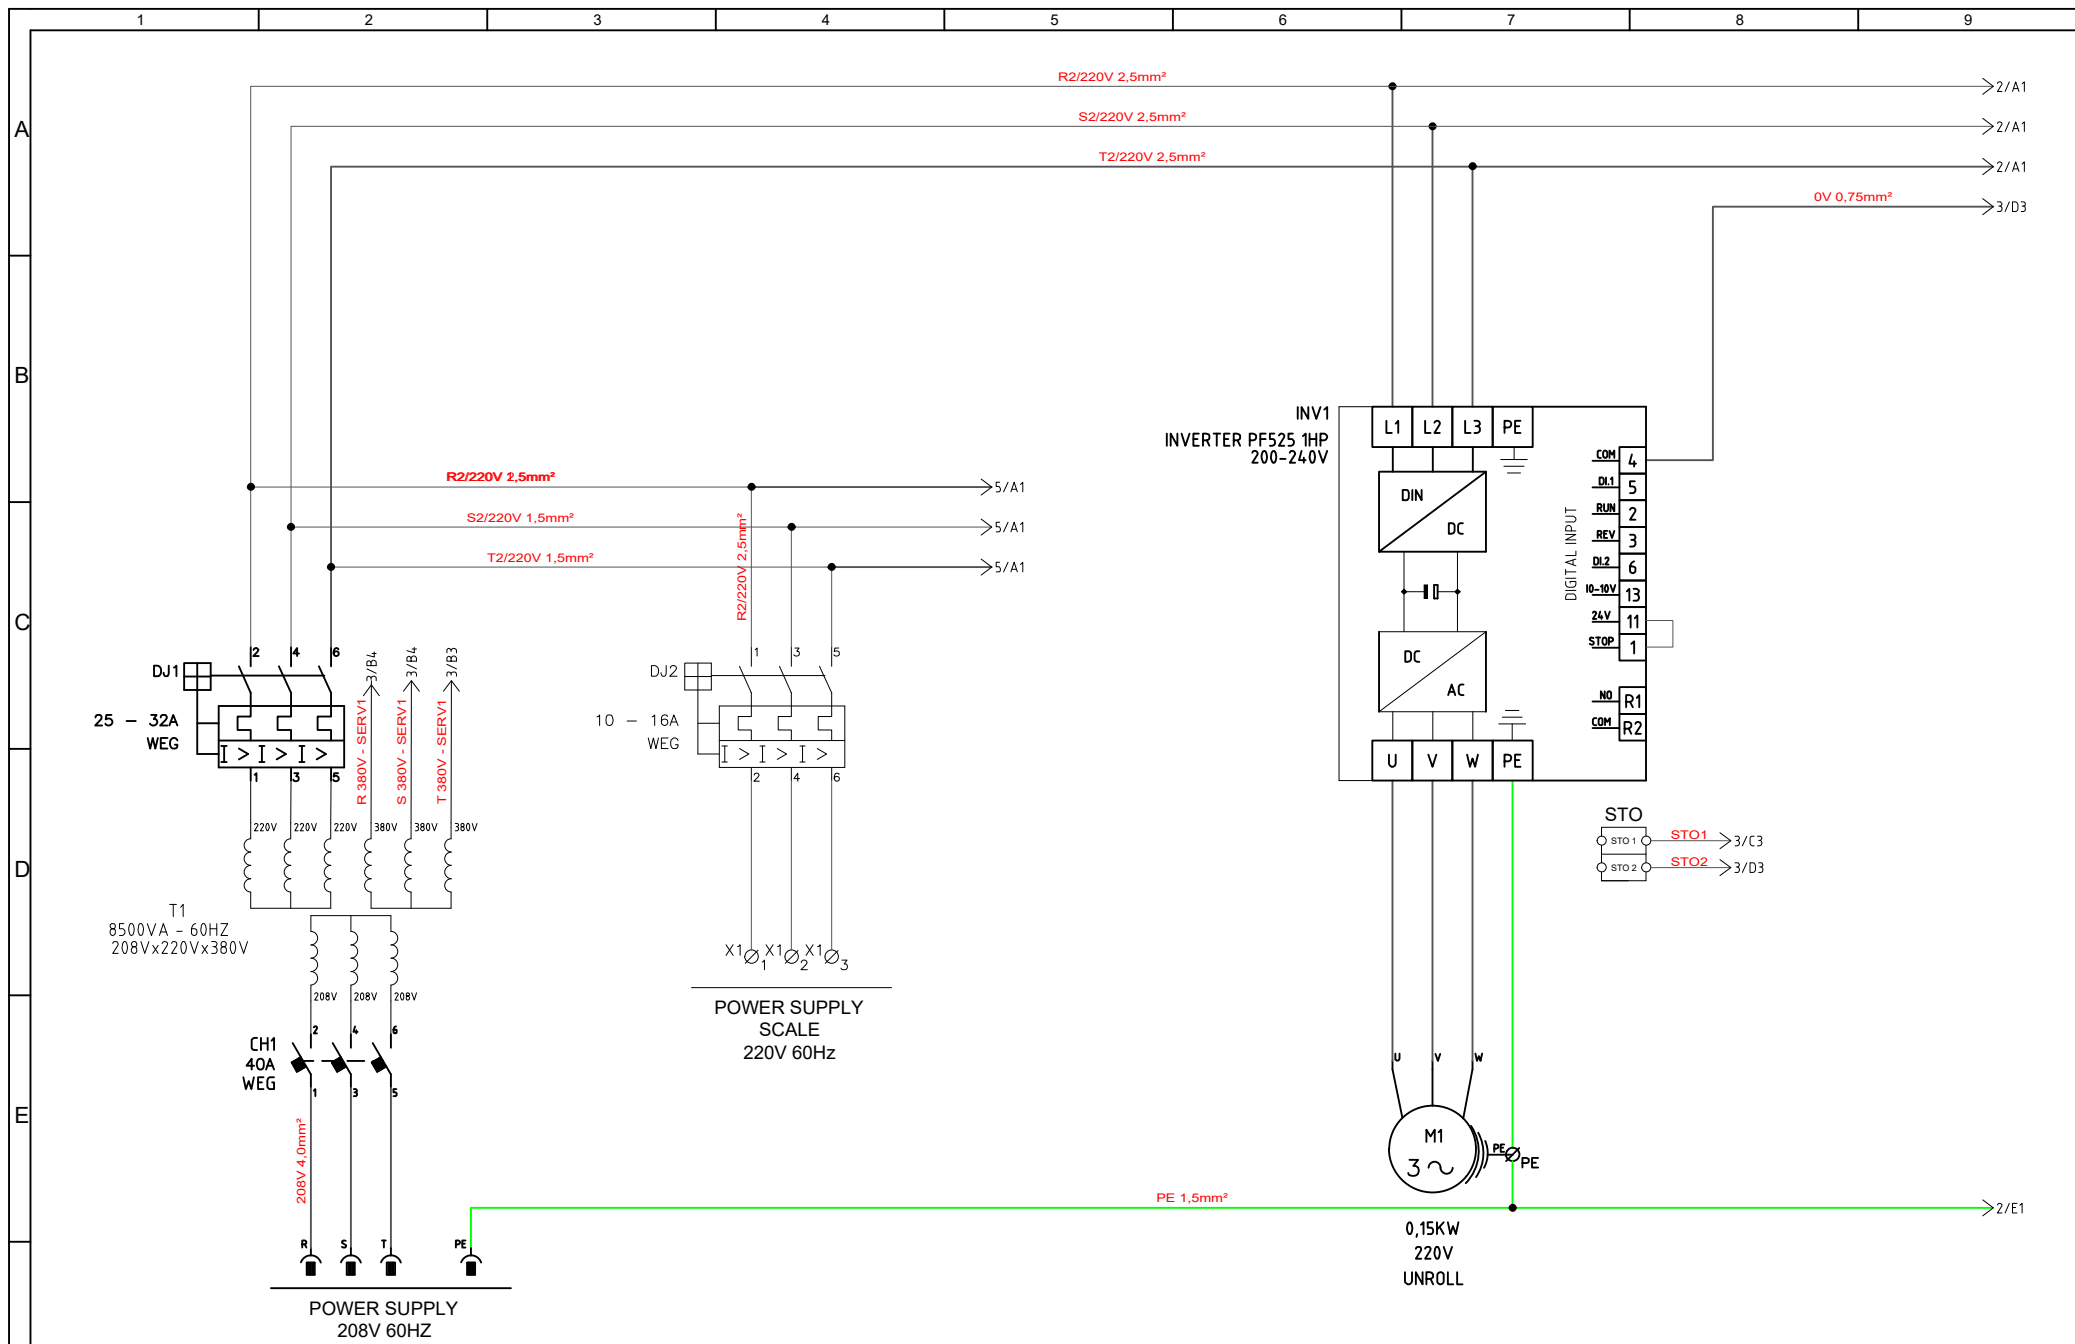


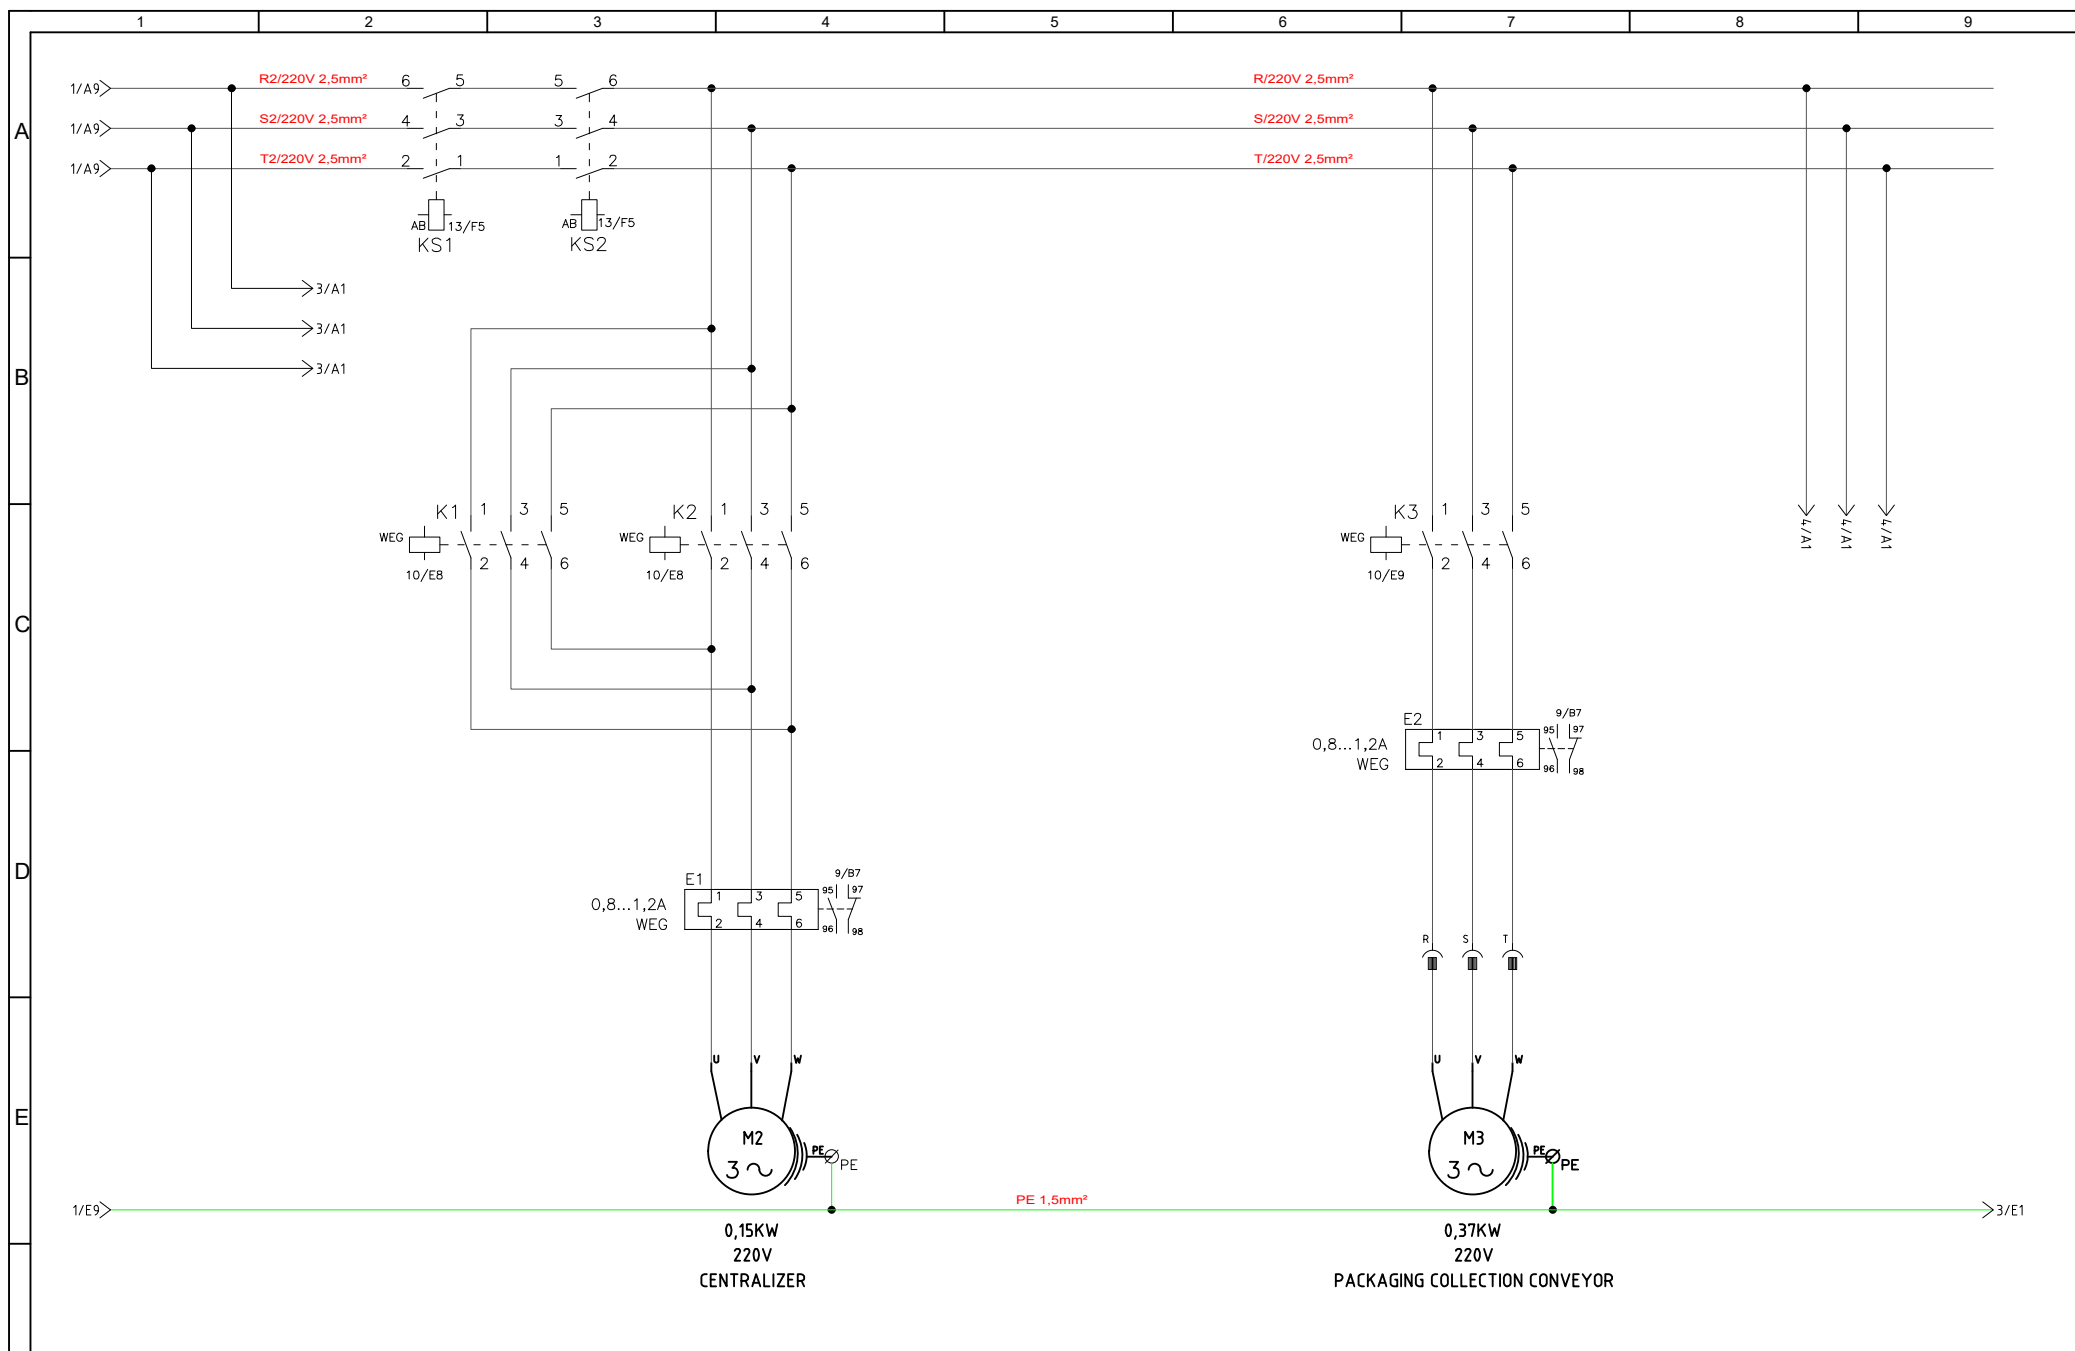



PROJECT	DESIGNED	REVIEW	MULTI BAG G	SERIAL NUMBER 24024140	REV. 1	CLIENT: ARTESANO			
MATHEUS		JANICE				CLIENT APPROVED:			
DATE	DATE	DATE	DESCRIPTION: POWER			PAGE 2 DE 16 ESC. 1:1			
29/04/2024		31/07/2024							

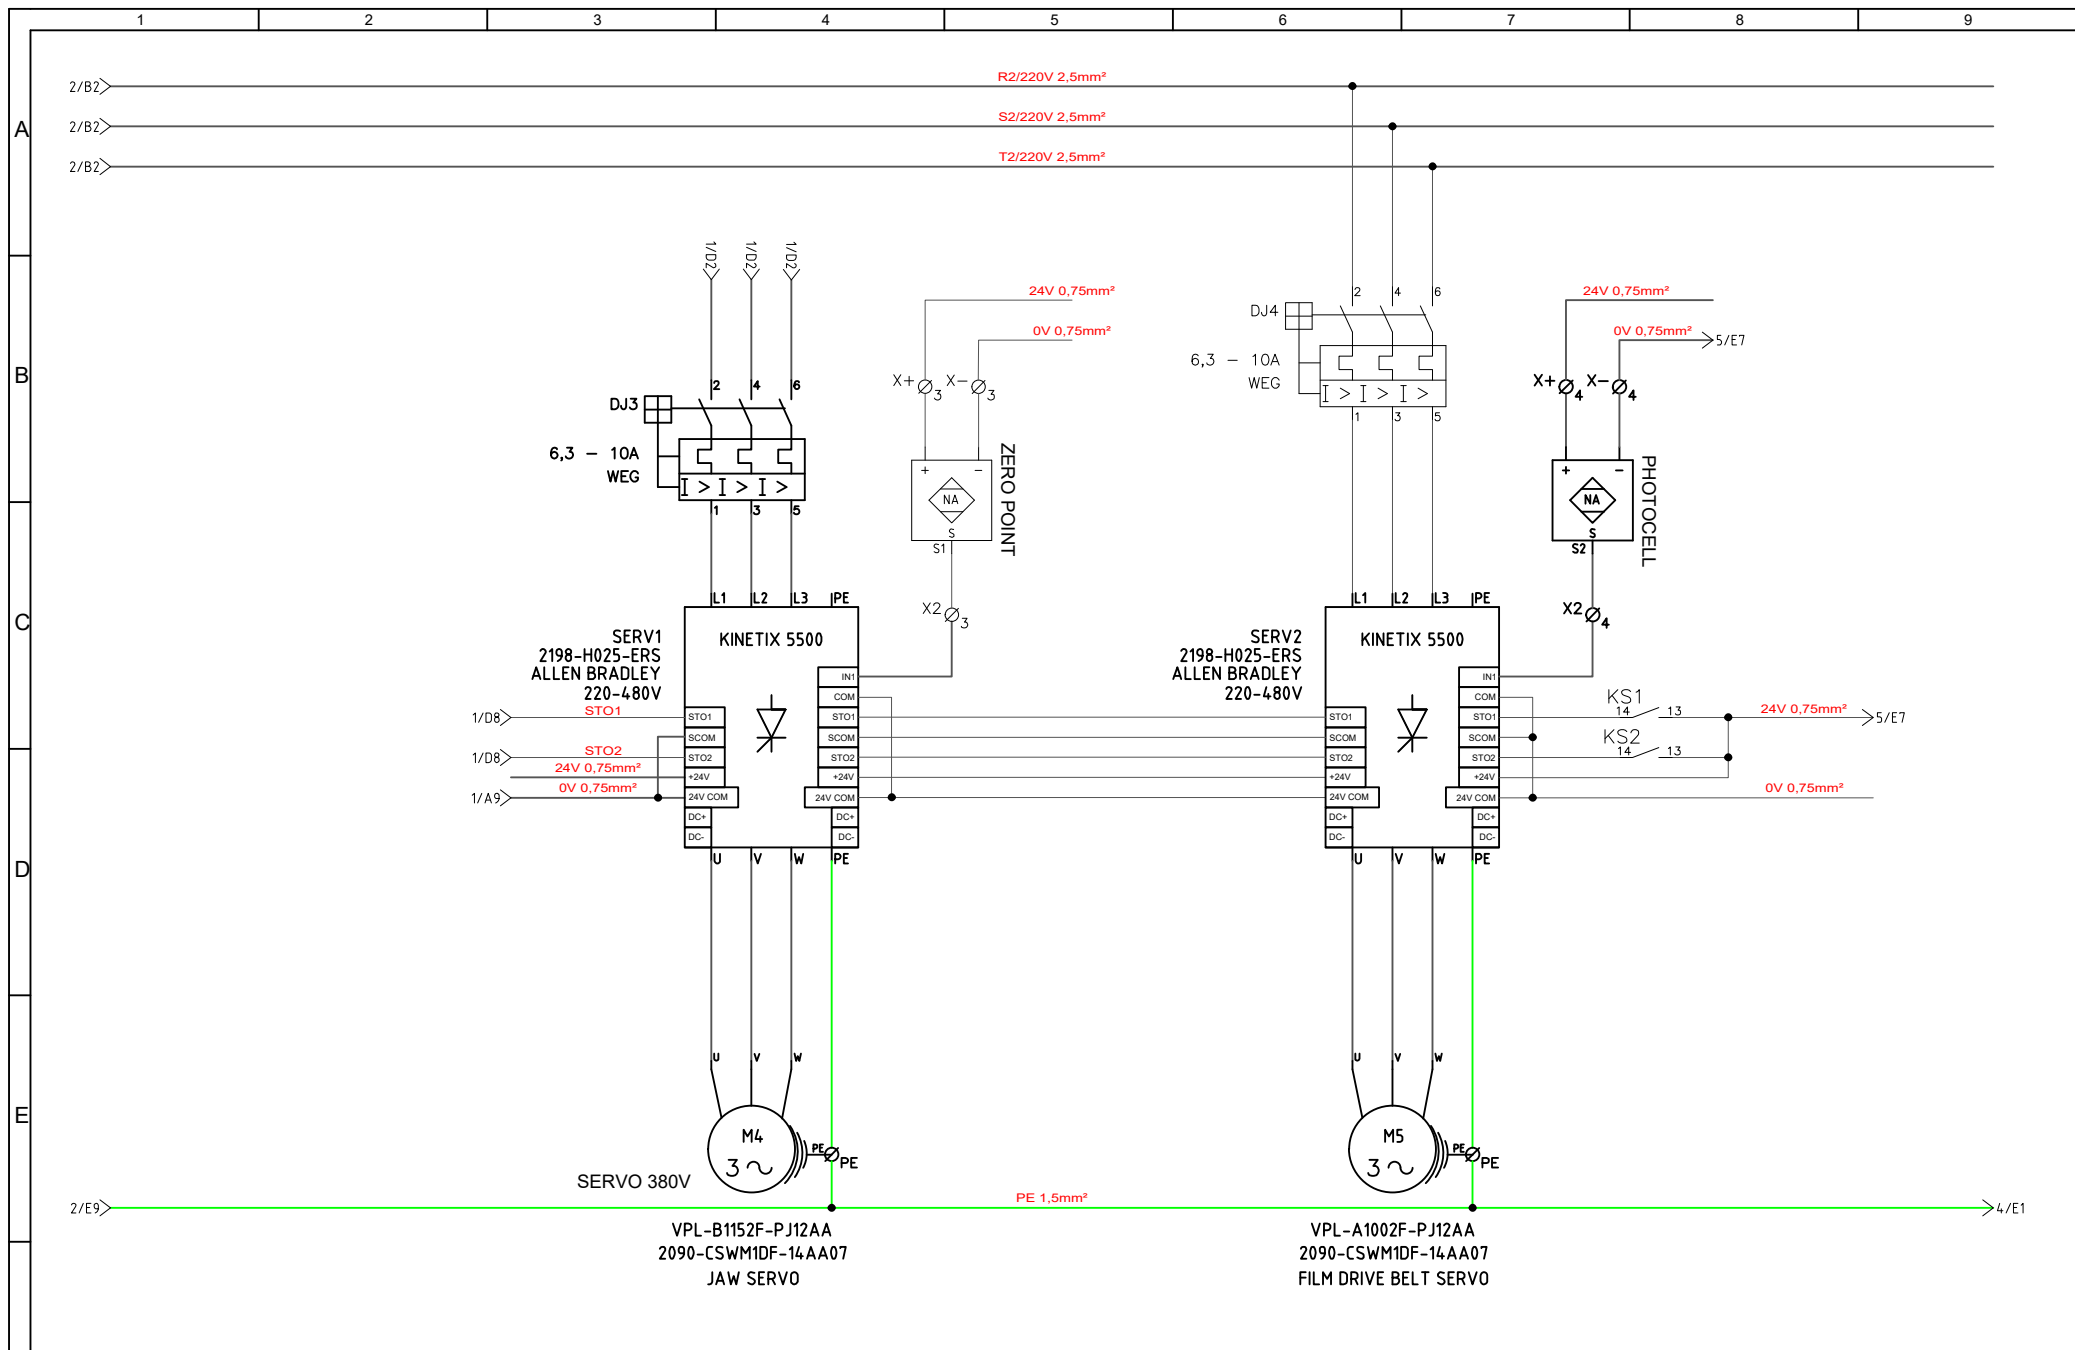


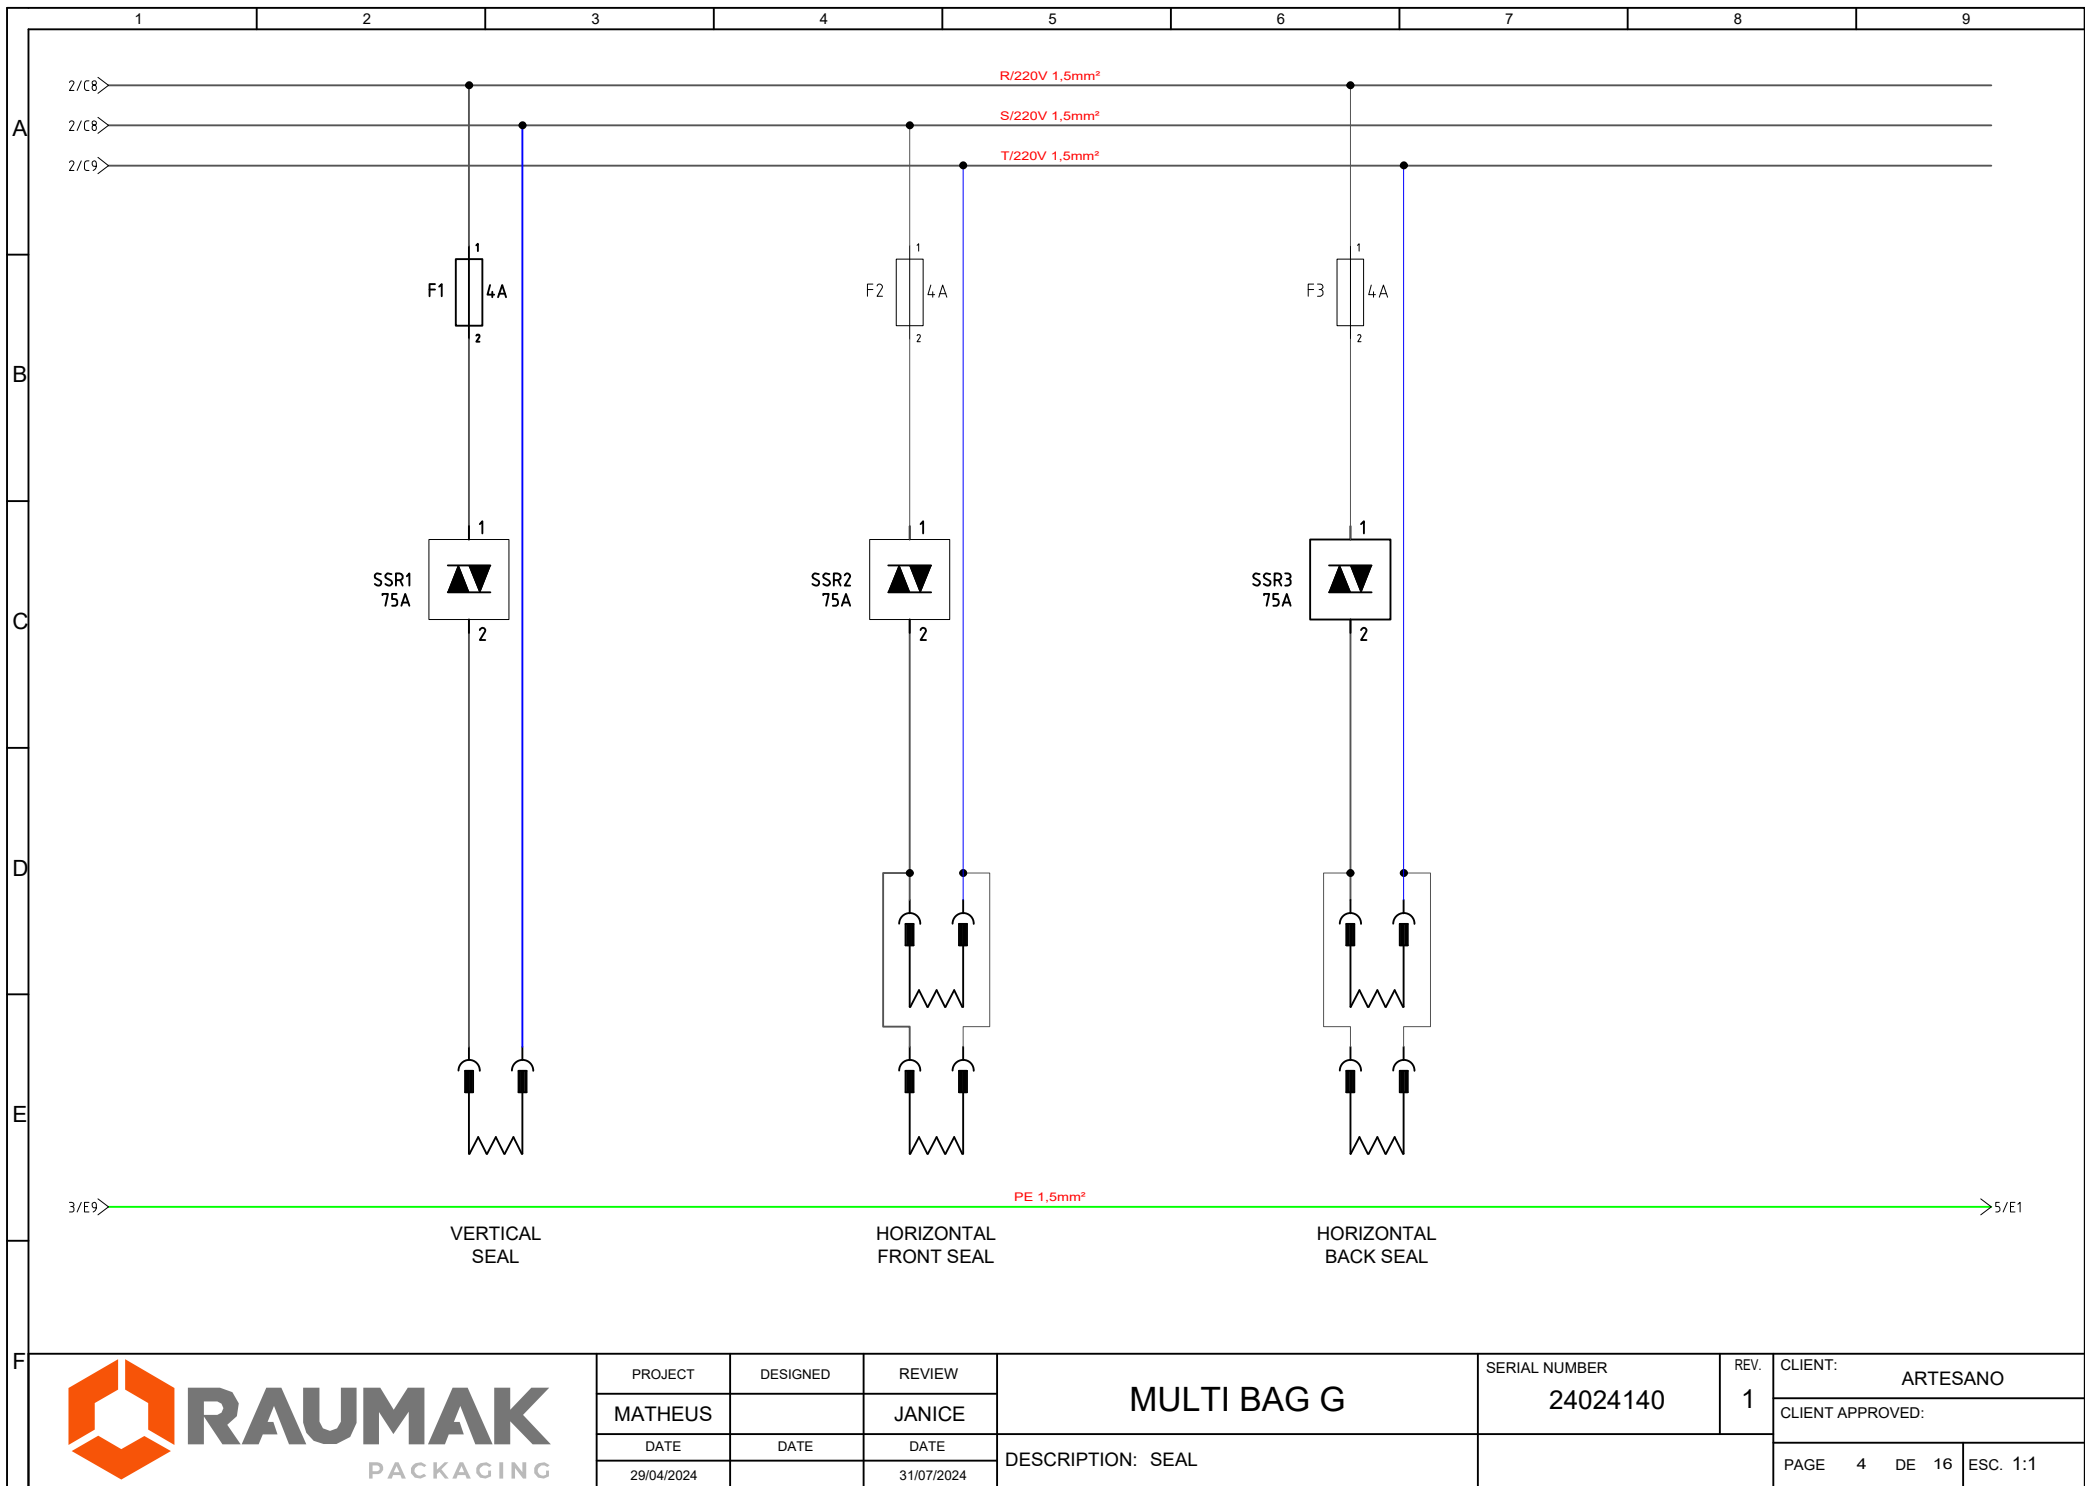


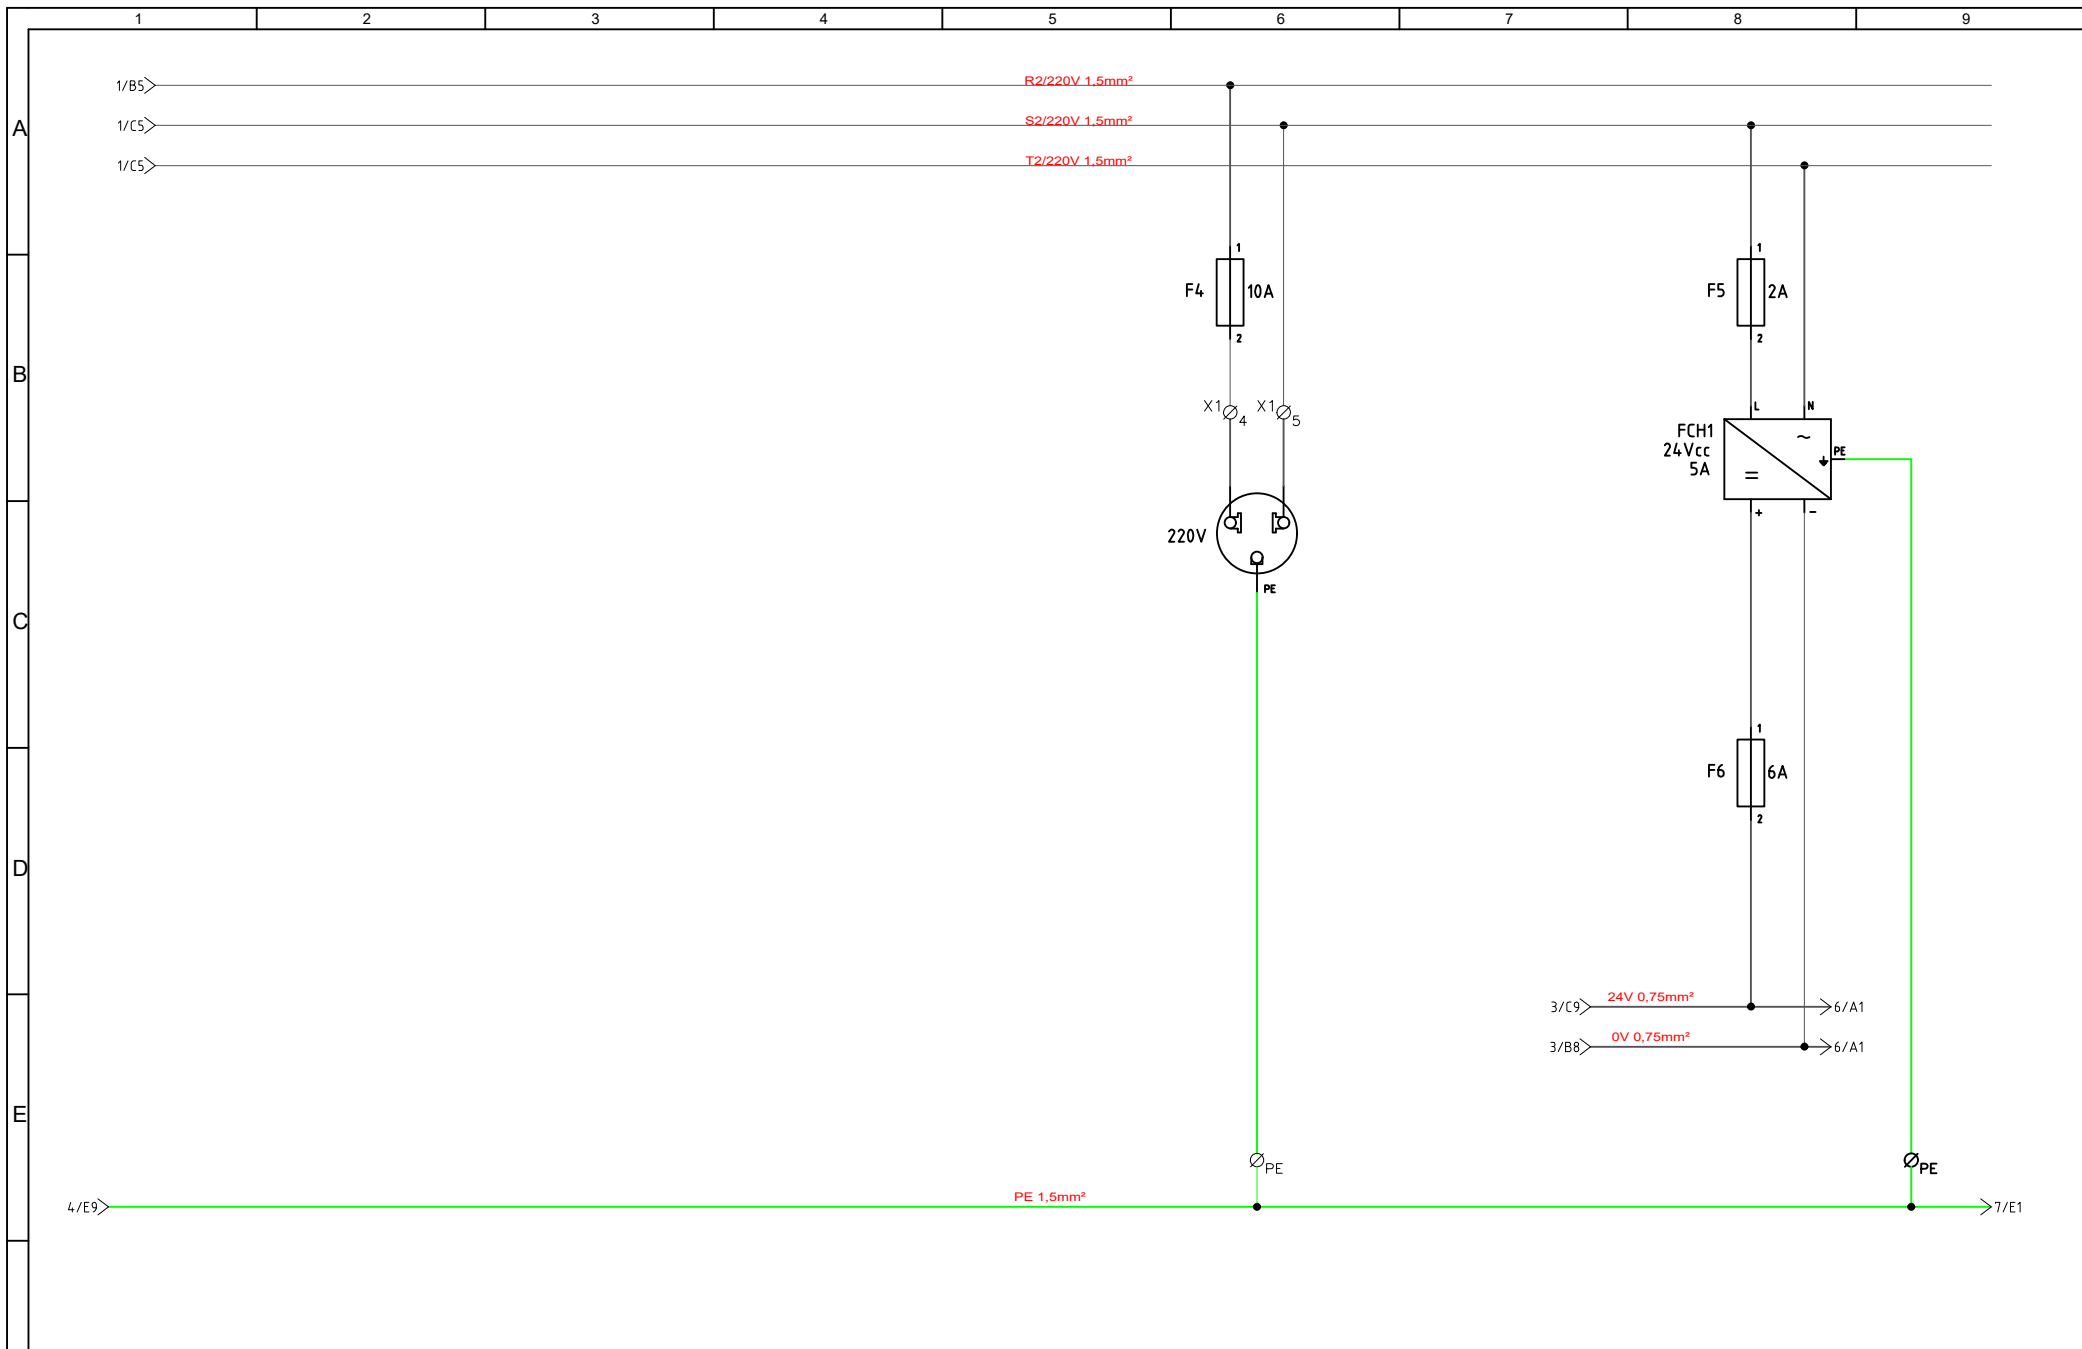


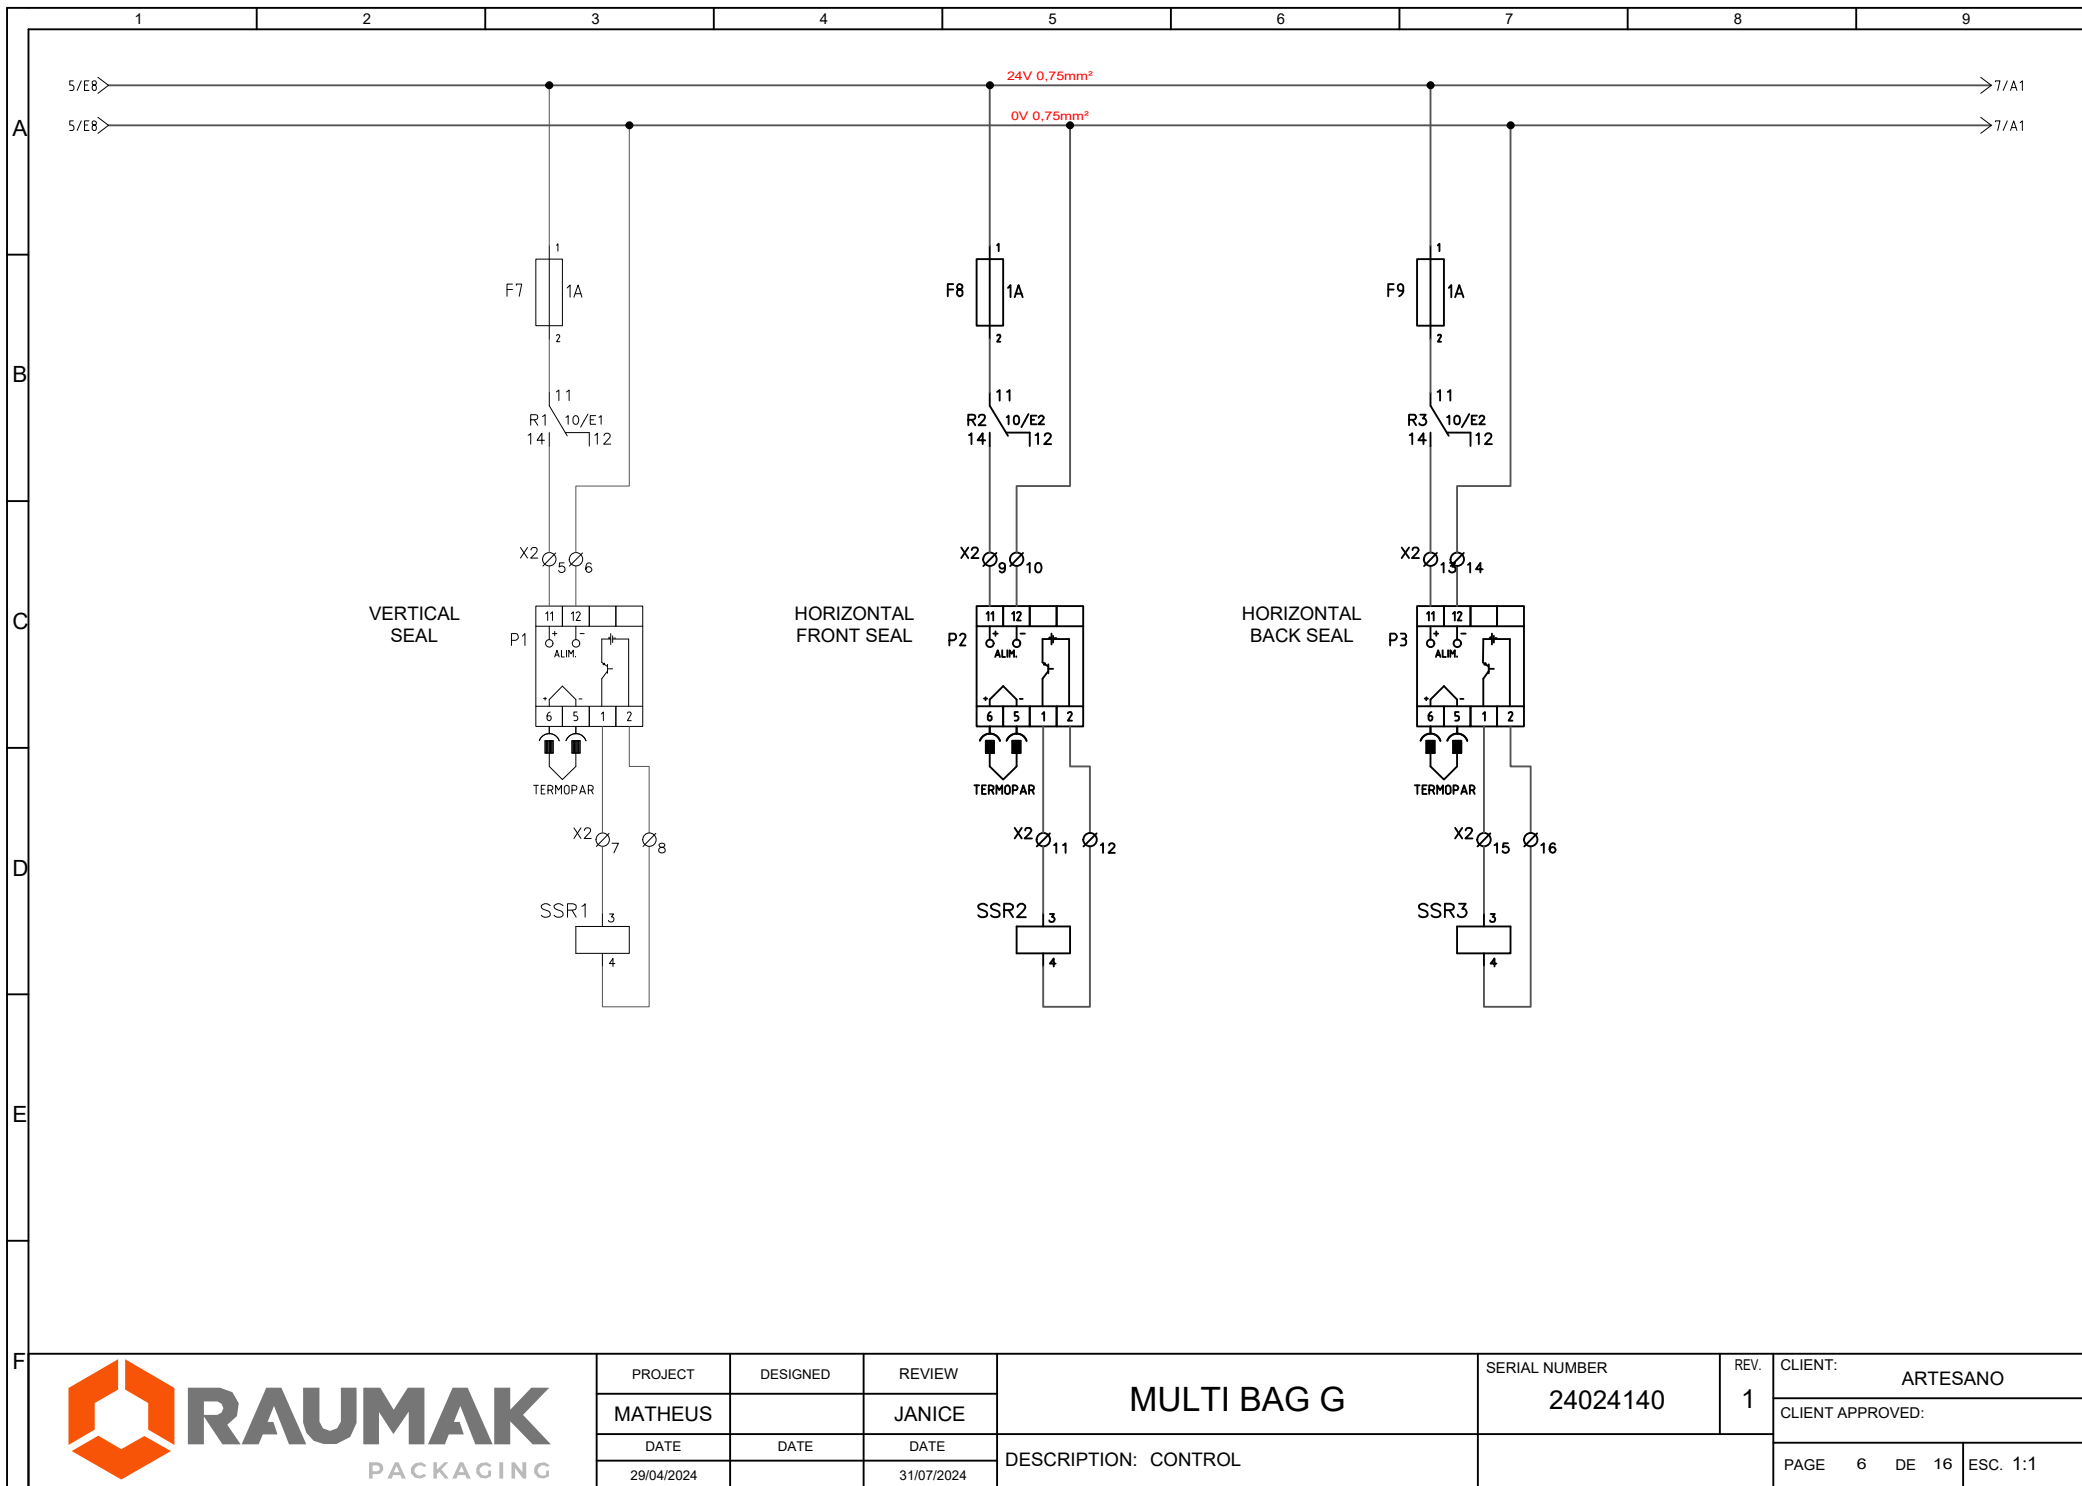


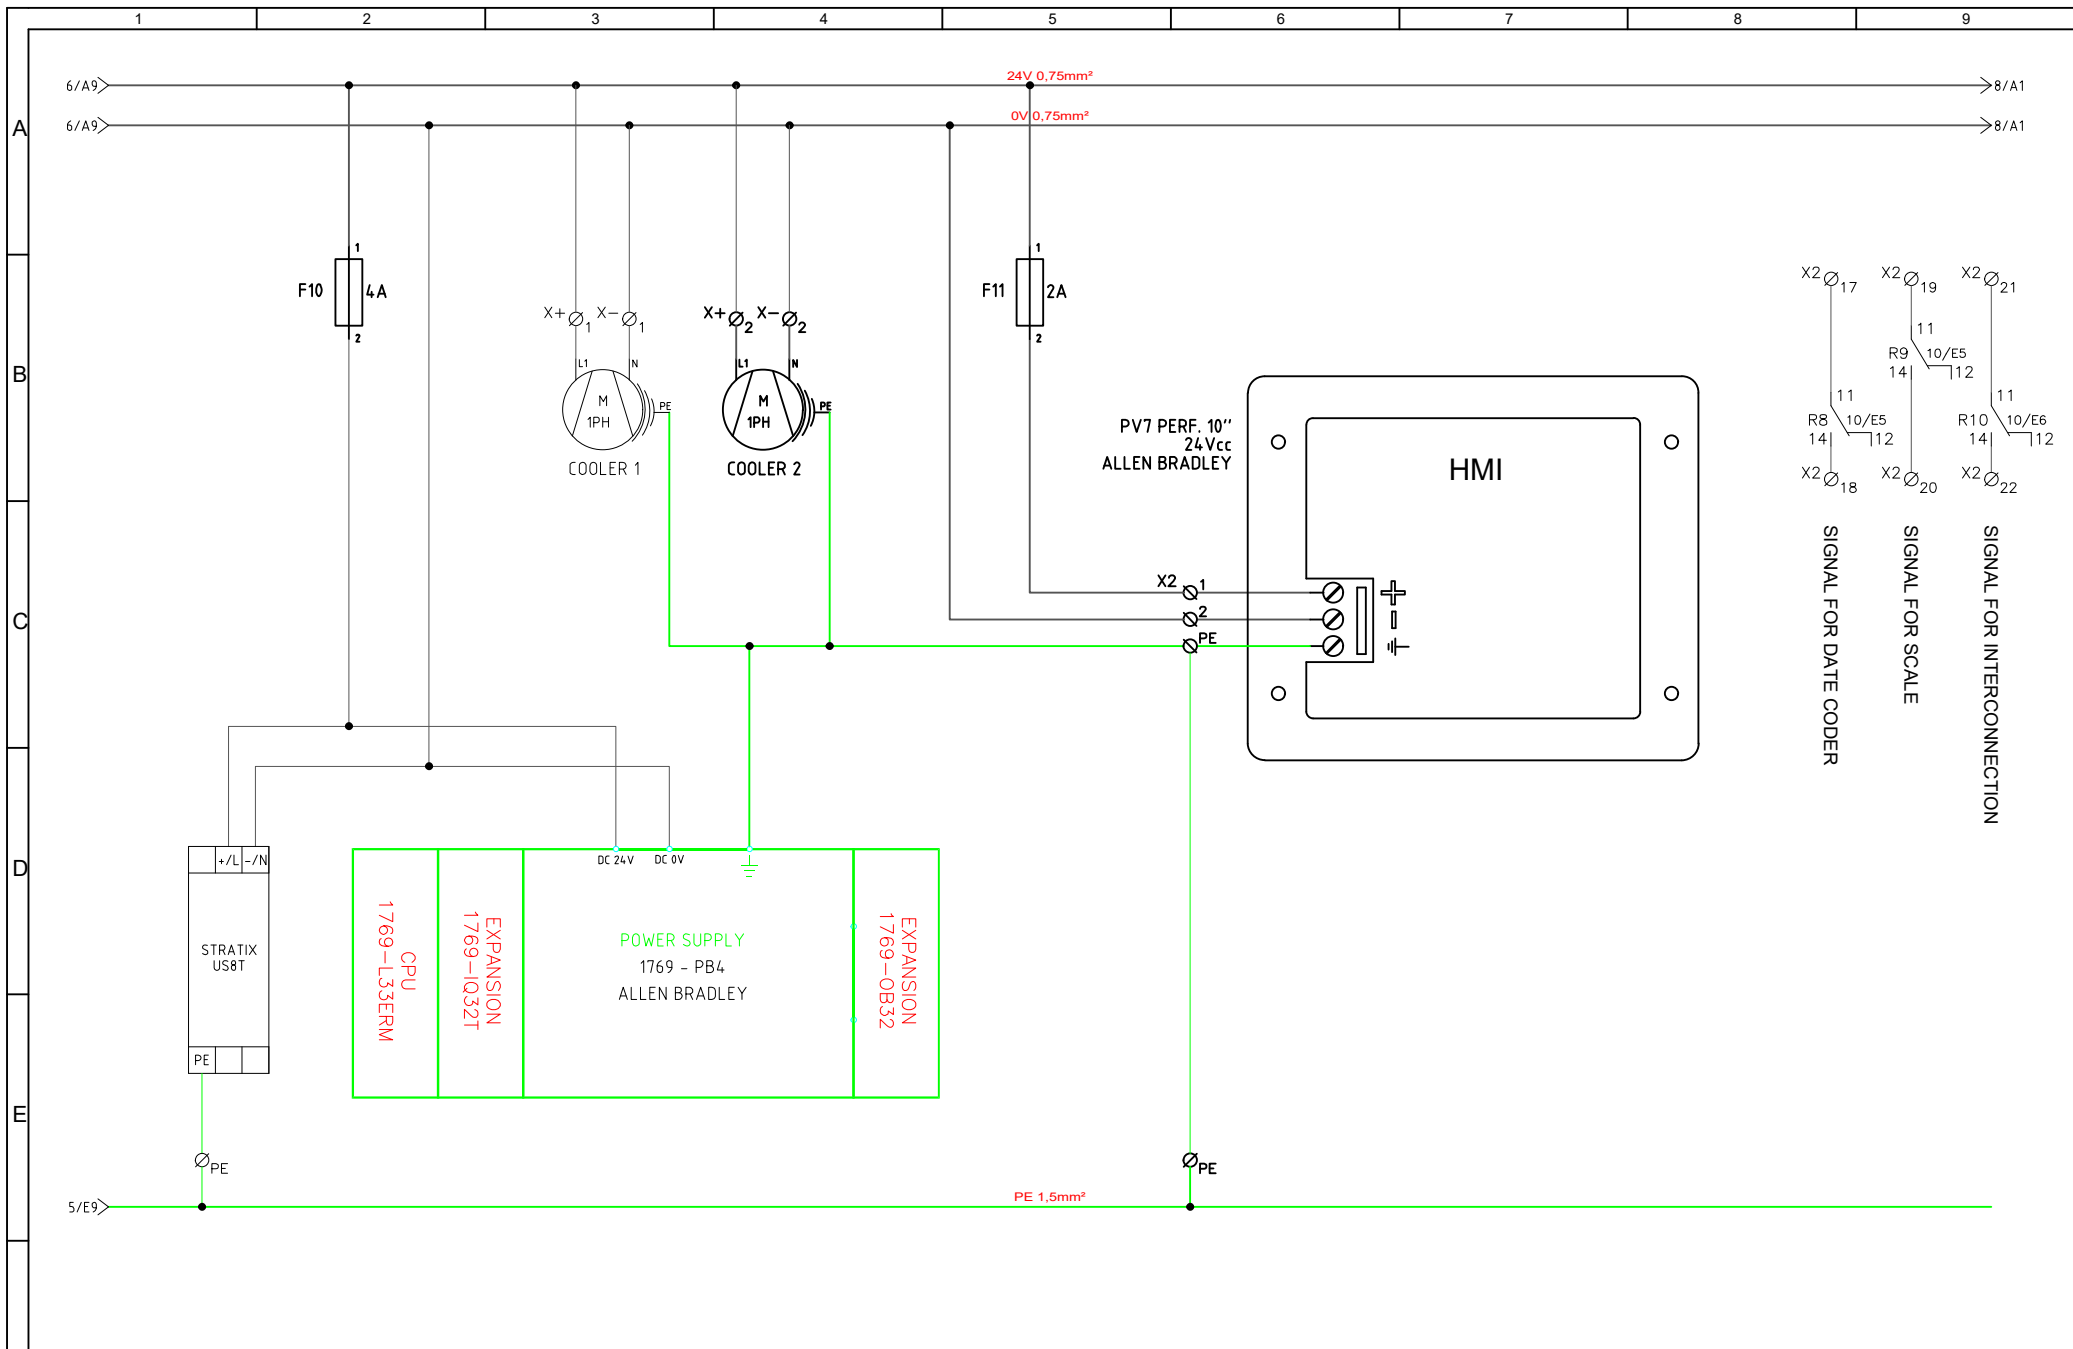


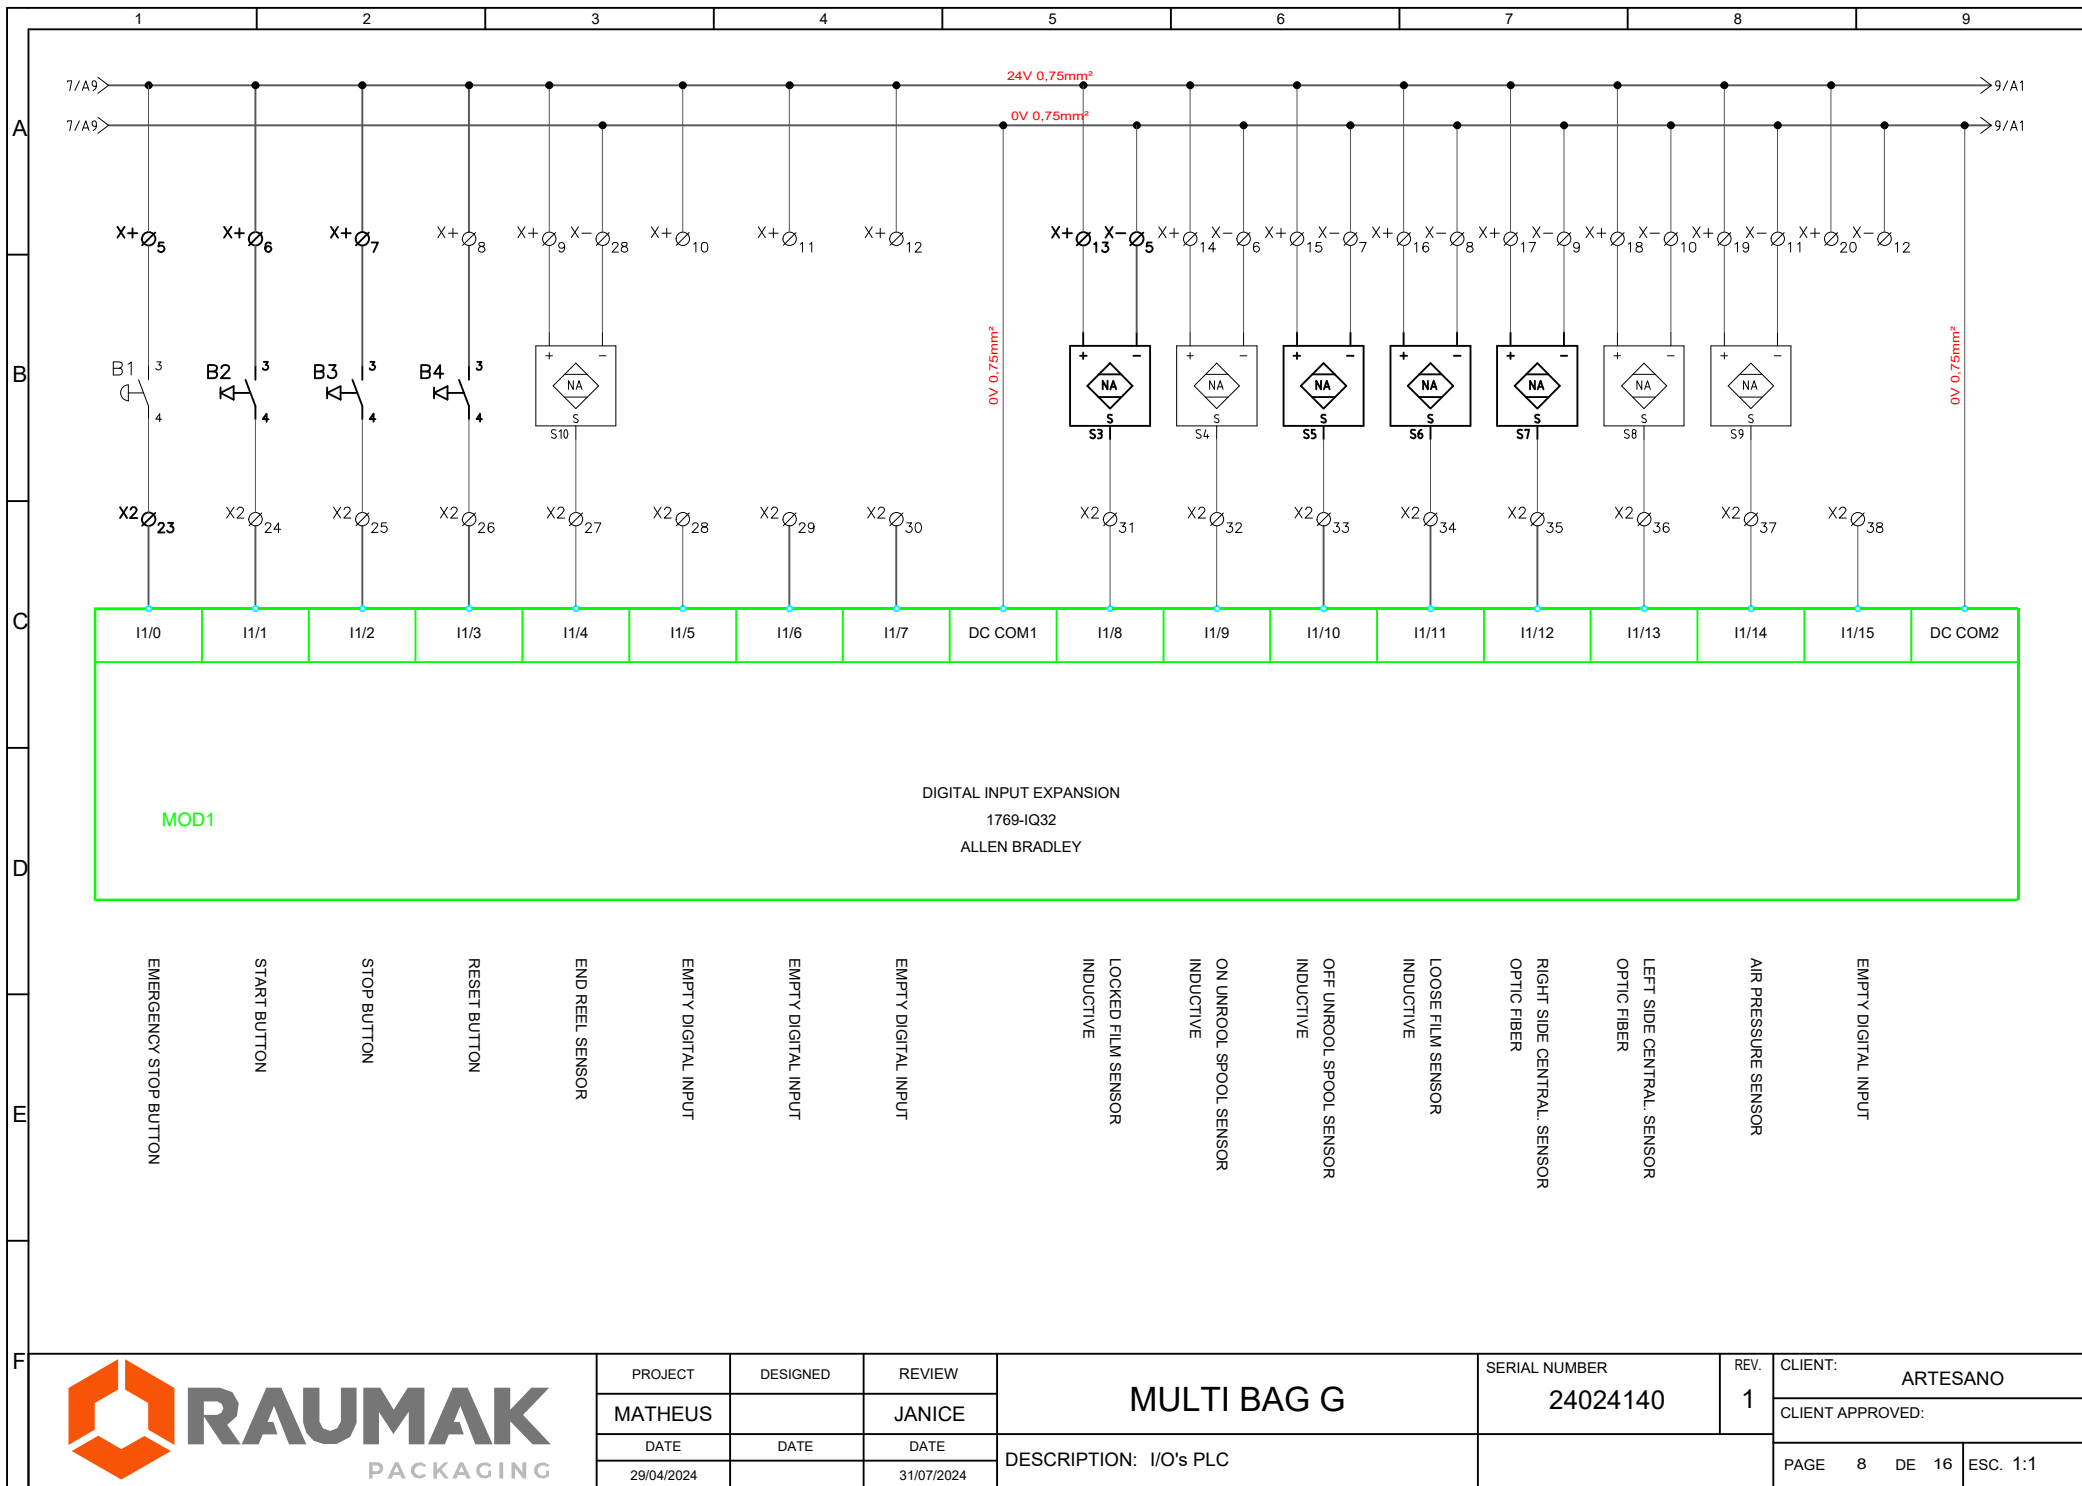


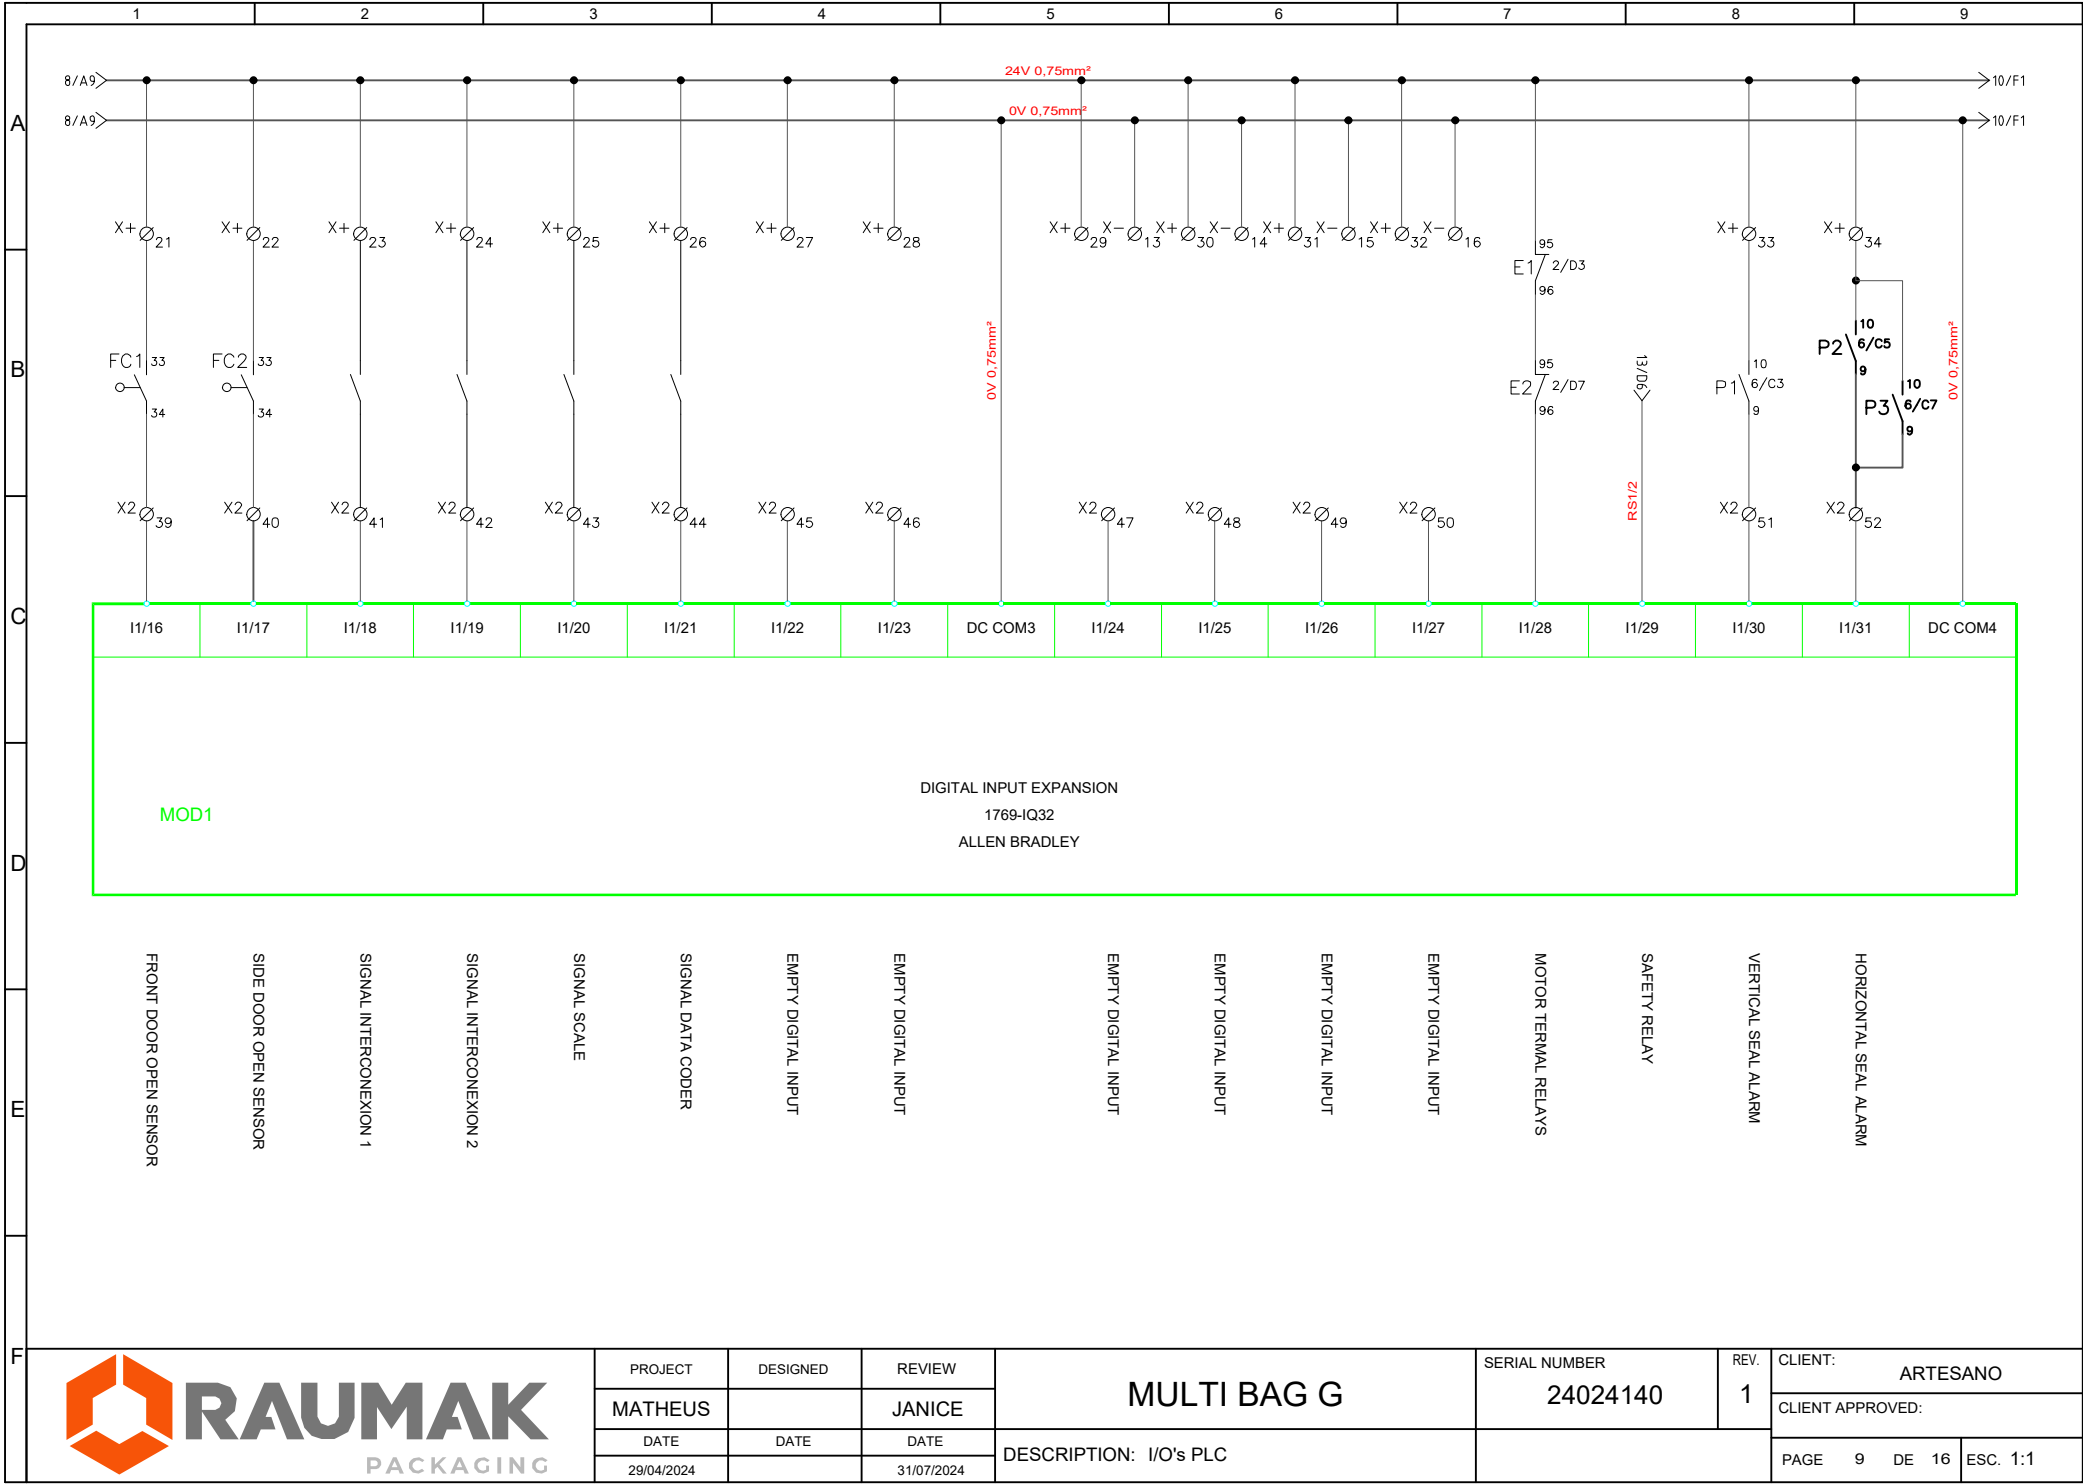

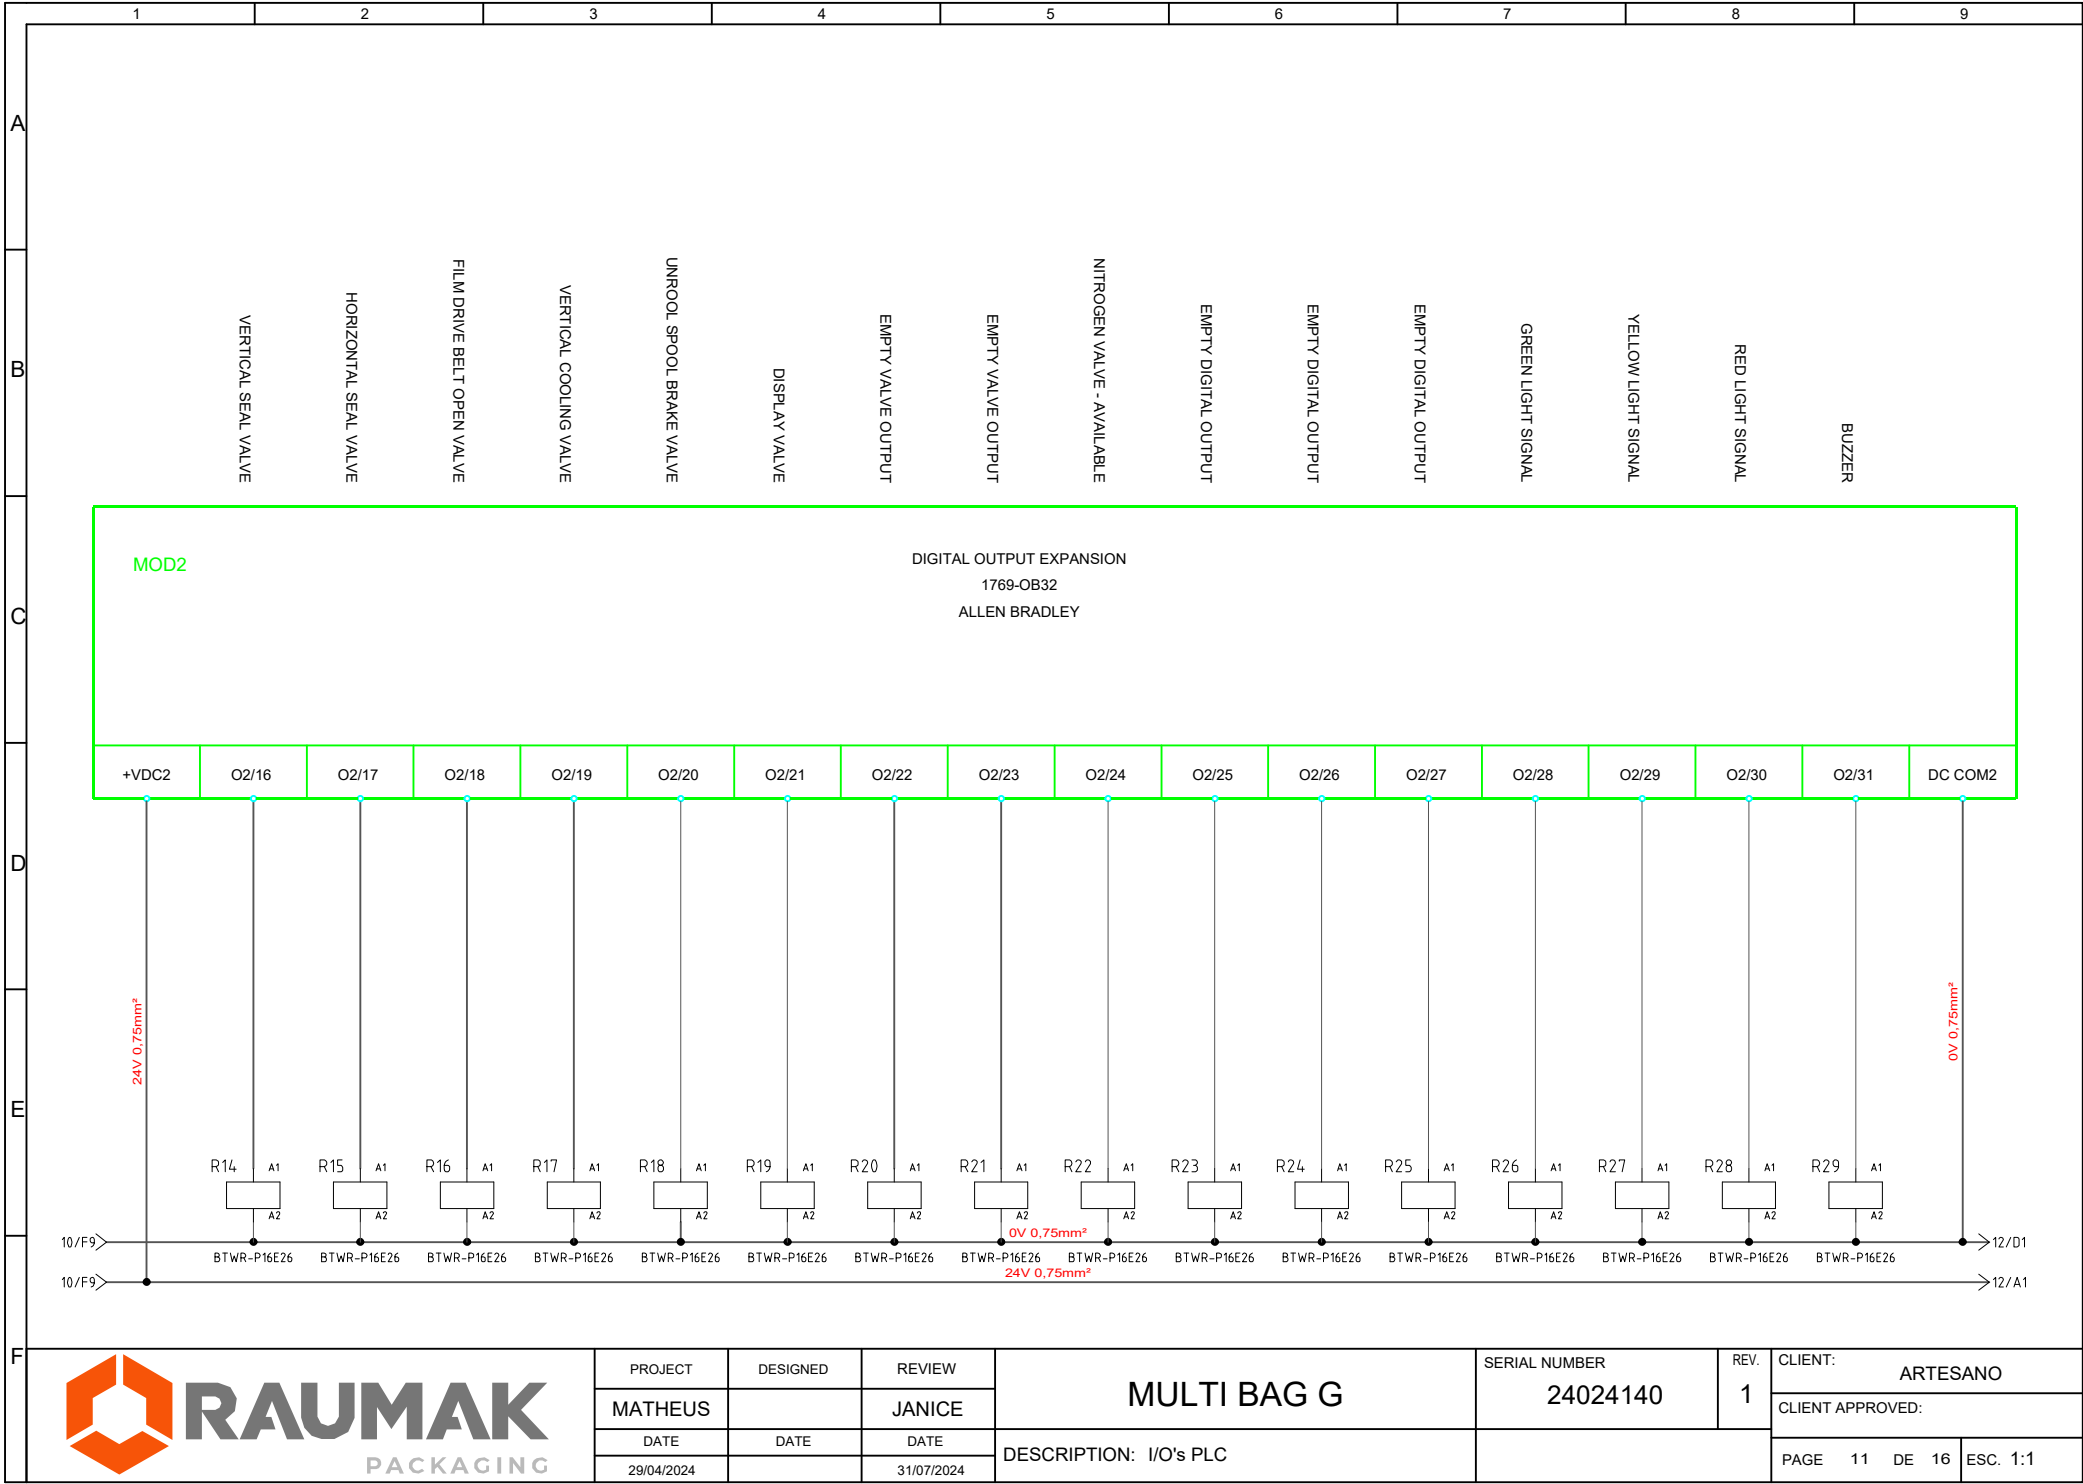

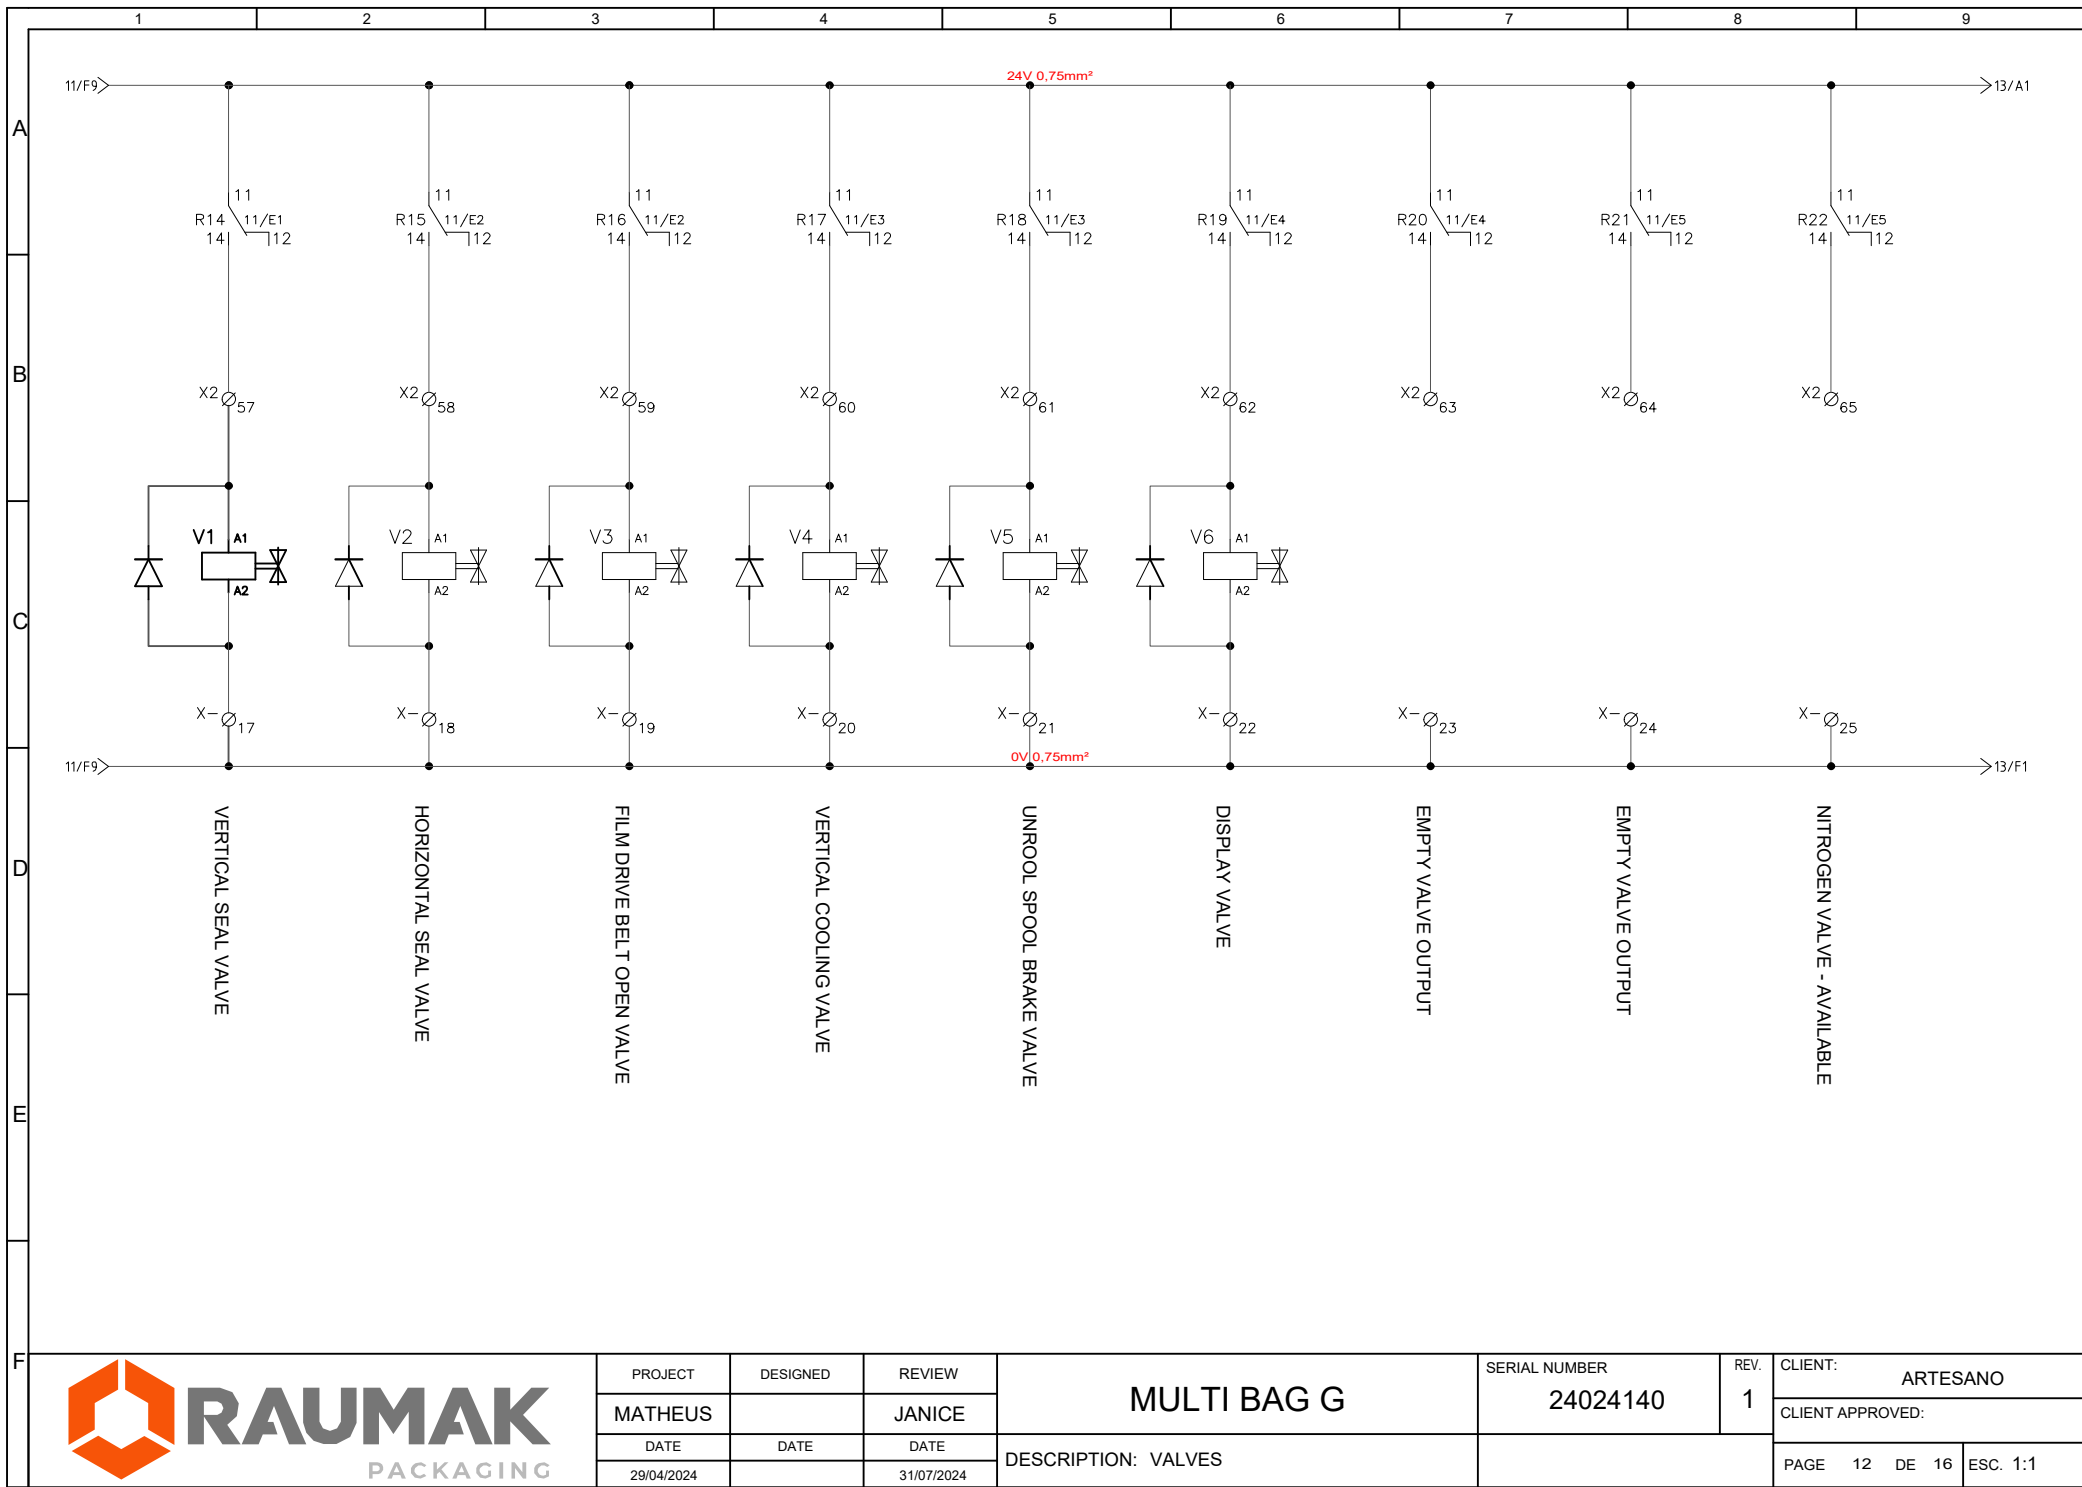

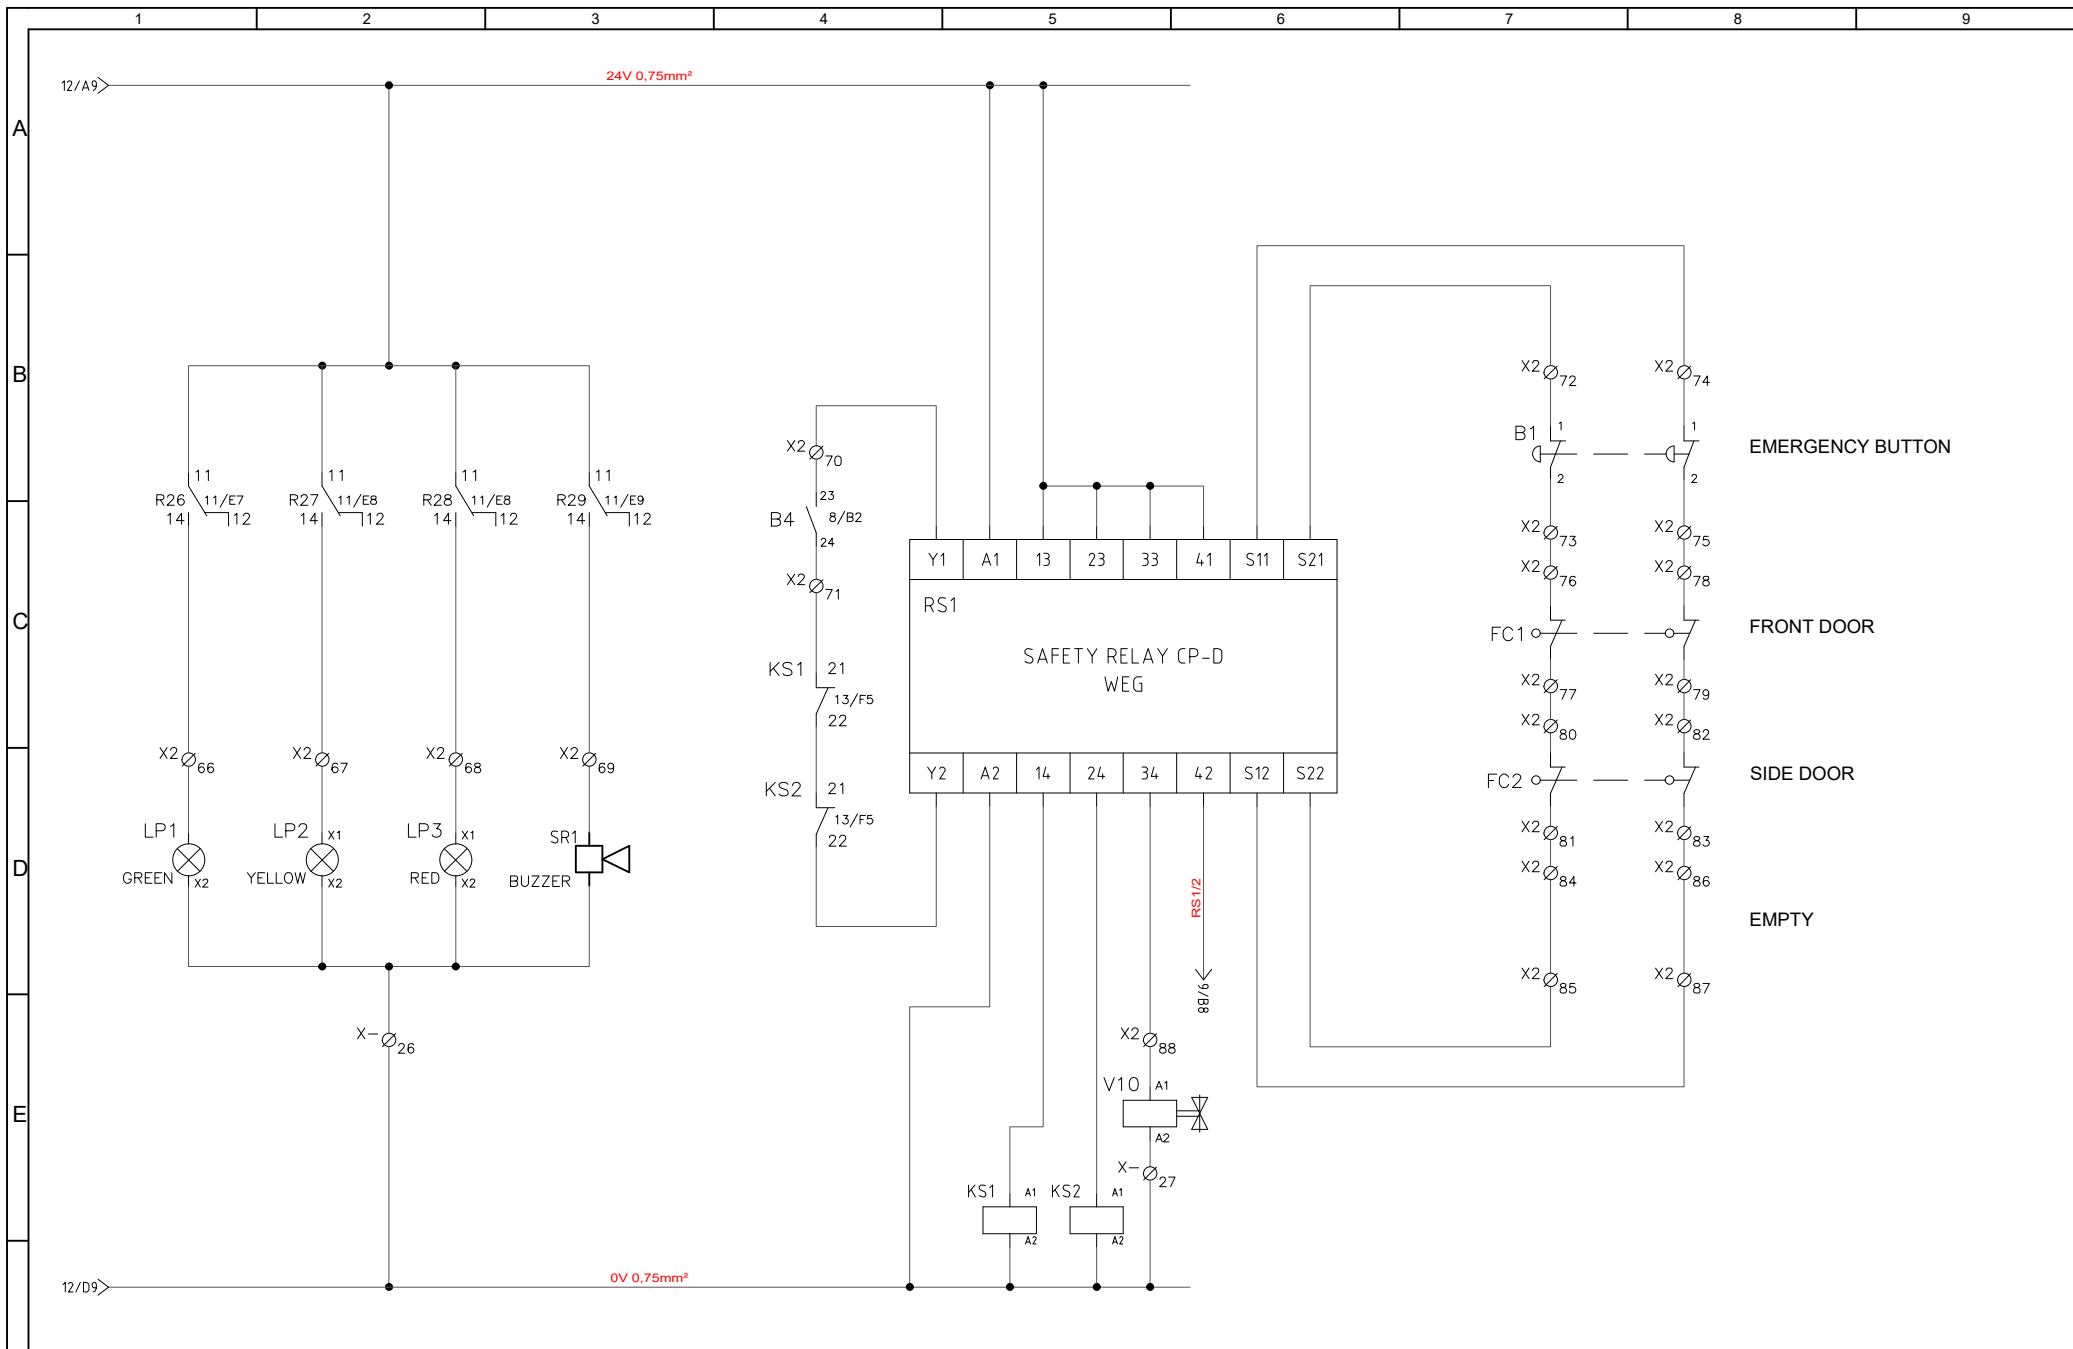

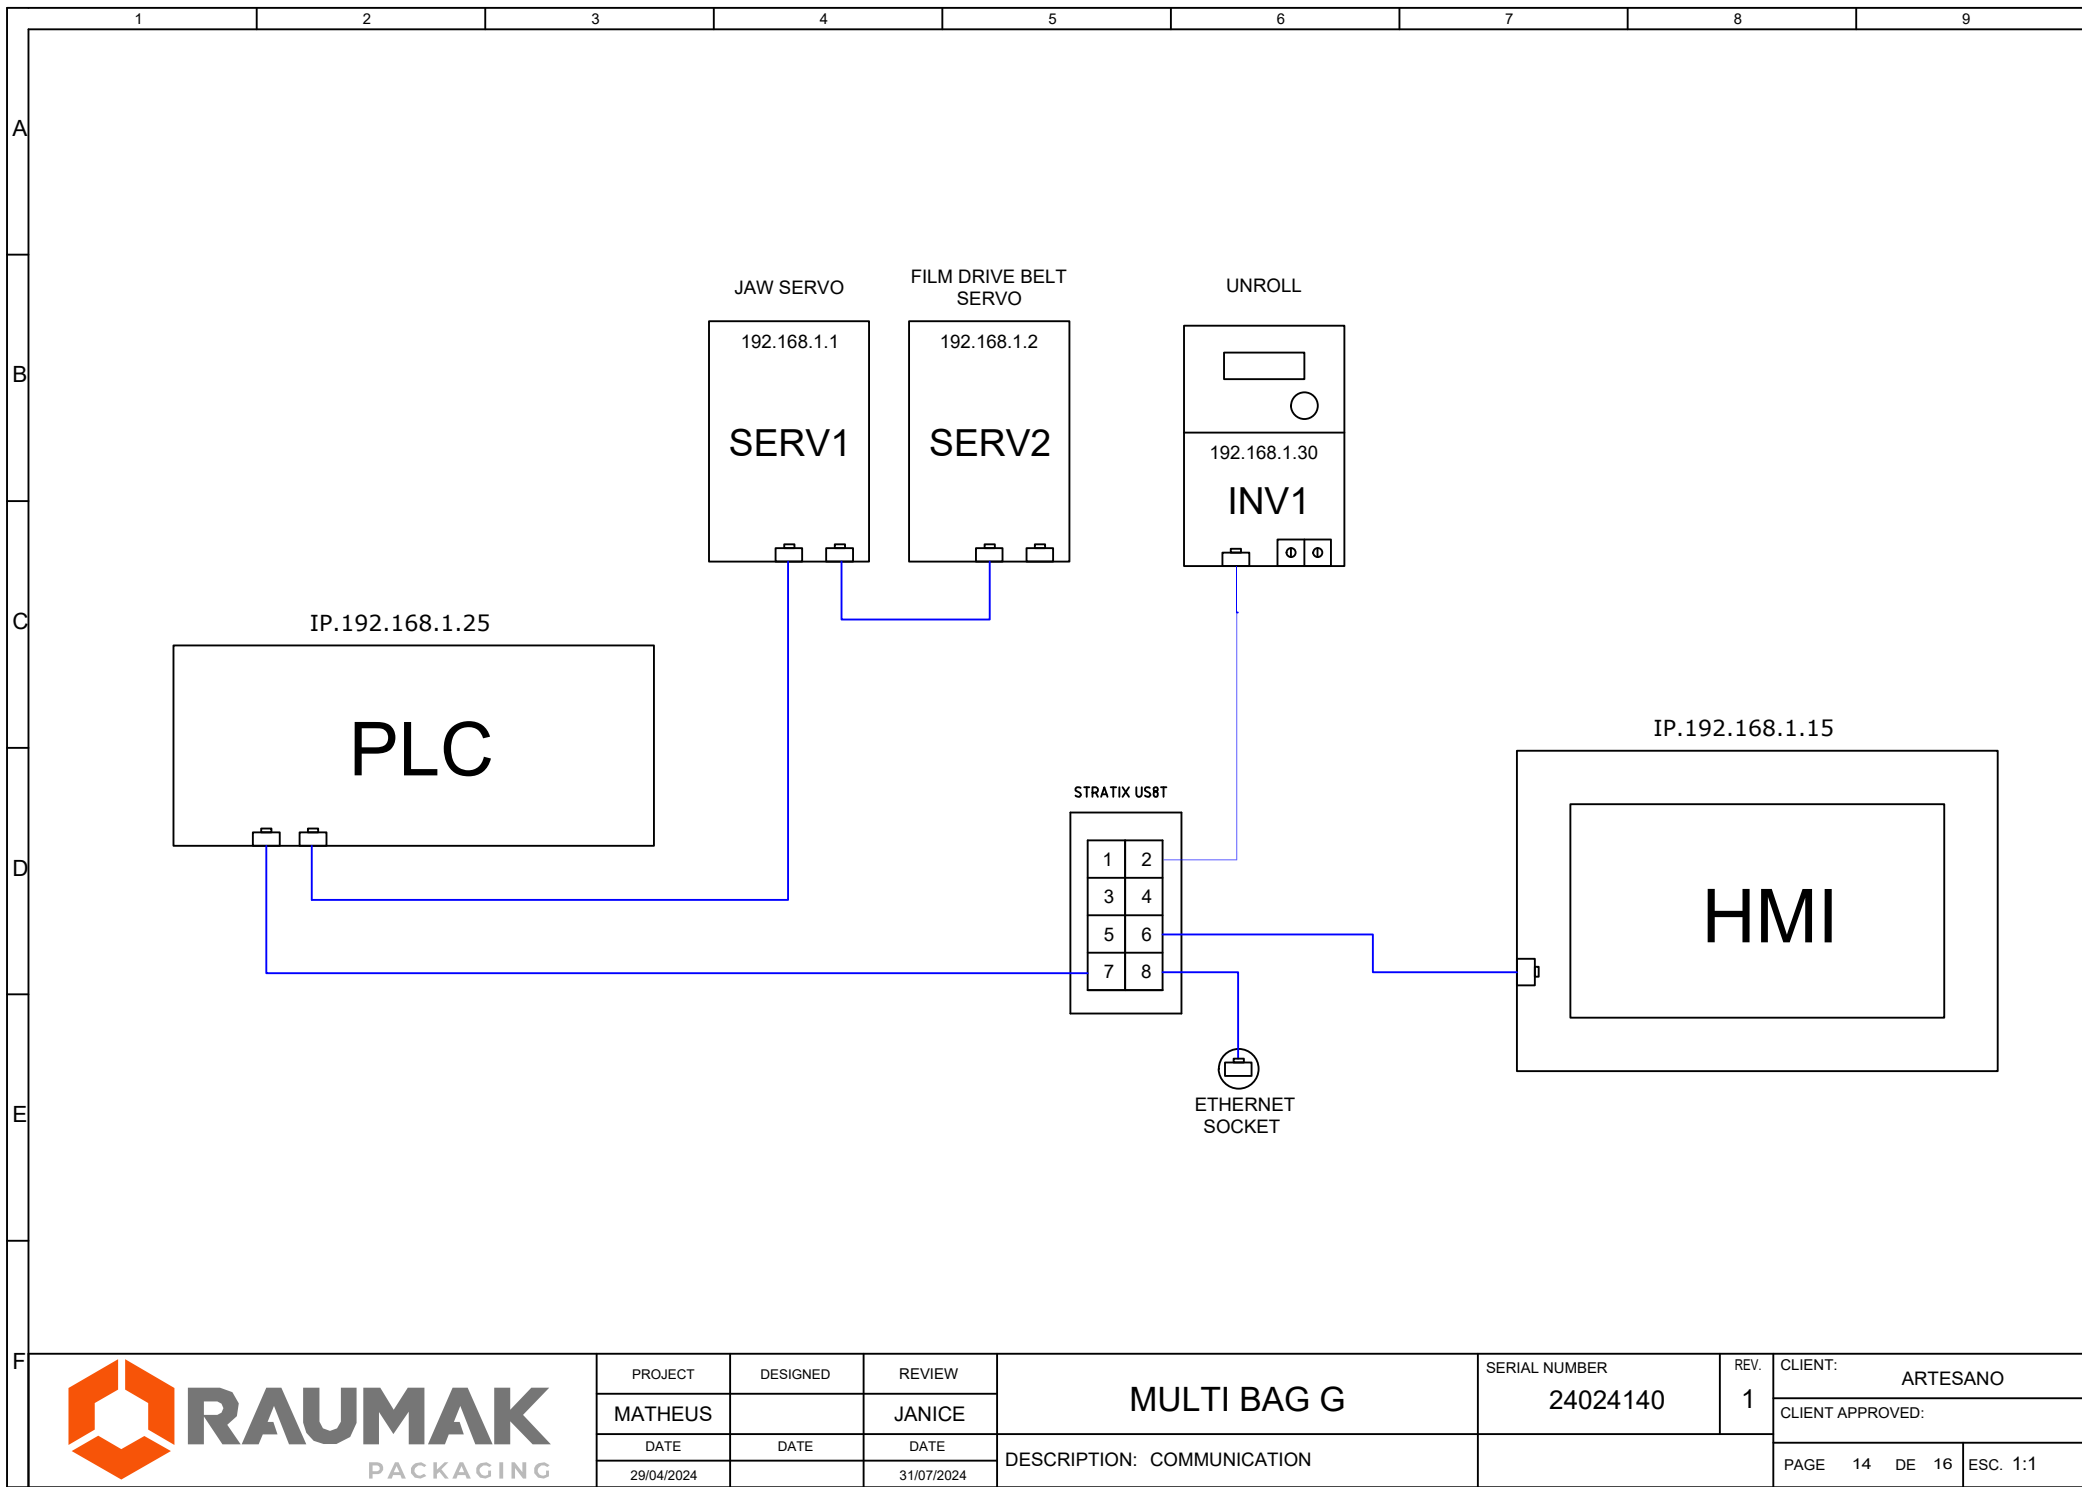



	1	2	3	4	5	6	7	8	9
A									
B	Parameters Frequency Inverter Power Flex 525 (AB):								
	Parameters:								

	1 - P031 = 380 or 220 (Motor Voltage)								
	2 - P033 = Motor Overload								
	3 - P034 = Motor Current + 30% (Overload Current)								
	4 - P035 = Number of poles								
	5 - P036 = RPM of Motor								
	6 - P037 = Rated Motor Power								
	7 - P039 = 0- V/Hz, 1- SVC, 3- Vector								
C	7,5- P040 = Autotune (0- Ready/Idle, 1- Static Tune, 2- Rotate Tune)								
	8 - P041 = Acceleration Time								
	9 - P042 = Desacceleration Time								
	10 - P043 = Minimum Frequency								
	11 - P044 = Maximum Frequency								
	12 - P046 = Start Force (1 - Keypad, 2 - Digital Input, 5 - EtherNet)								
	13 - P047 = Speed Reference (2 - Keypad, 15 - EtherNet, 3 - Serial)								
	14 - t062 = Digital Input - (48 start 2 wires)								
	14,5 t065 = Digital Input - (13 remove fault)								
D	15 - C128 = Set fixed or dynamic IP (1 - fixed; 2 - dynamic)								
	16 - C129 = Set IP address 1st part (192)								
	17 - C130 = Set IP address 2st part (168)								
	18 - C131 = Set IP address 3st part (1)								
	19 - C132 = Set IP address 4st part (XXX)								
	20 - C133 = Define subnet 1st part (255)								
	21 - C134 = Define subnet 2st part (255)								
	22 - C135 = Define subnet 3st part (255)								
	23 - C136 = Define subnet 4st part (0)								
E									
F									