


REV	DCR No.	DATE	REVISION	DRW	APP'D
A	212	7/95	ADDED 9014L LOCKWASHER	JM	MF
B	212	7/95	ADDED 9012L LOCKWASHER	JM	MF
C	7310	3/7/00	REDRAWN ON SOLID WORKS	JM	RJ

SKIP WELD RING TO
GEARCASE AFTER
BEARING IS BOLTED ON.

1/8" SET-UP BETWEEN
ITEM 4 & ITEM 2

SHAFT SHOWN
AS REFERENCE

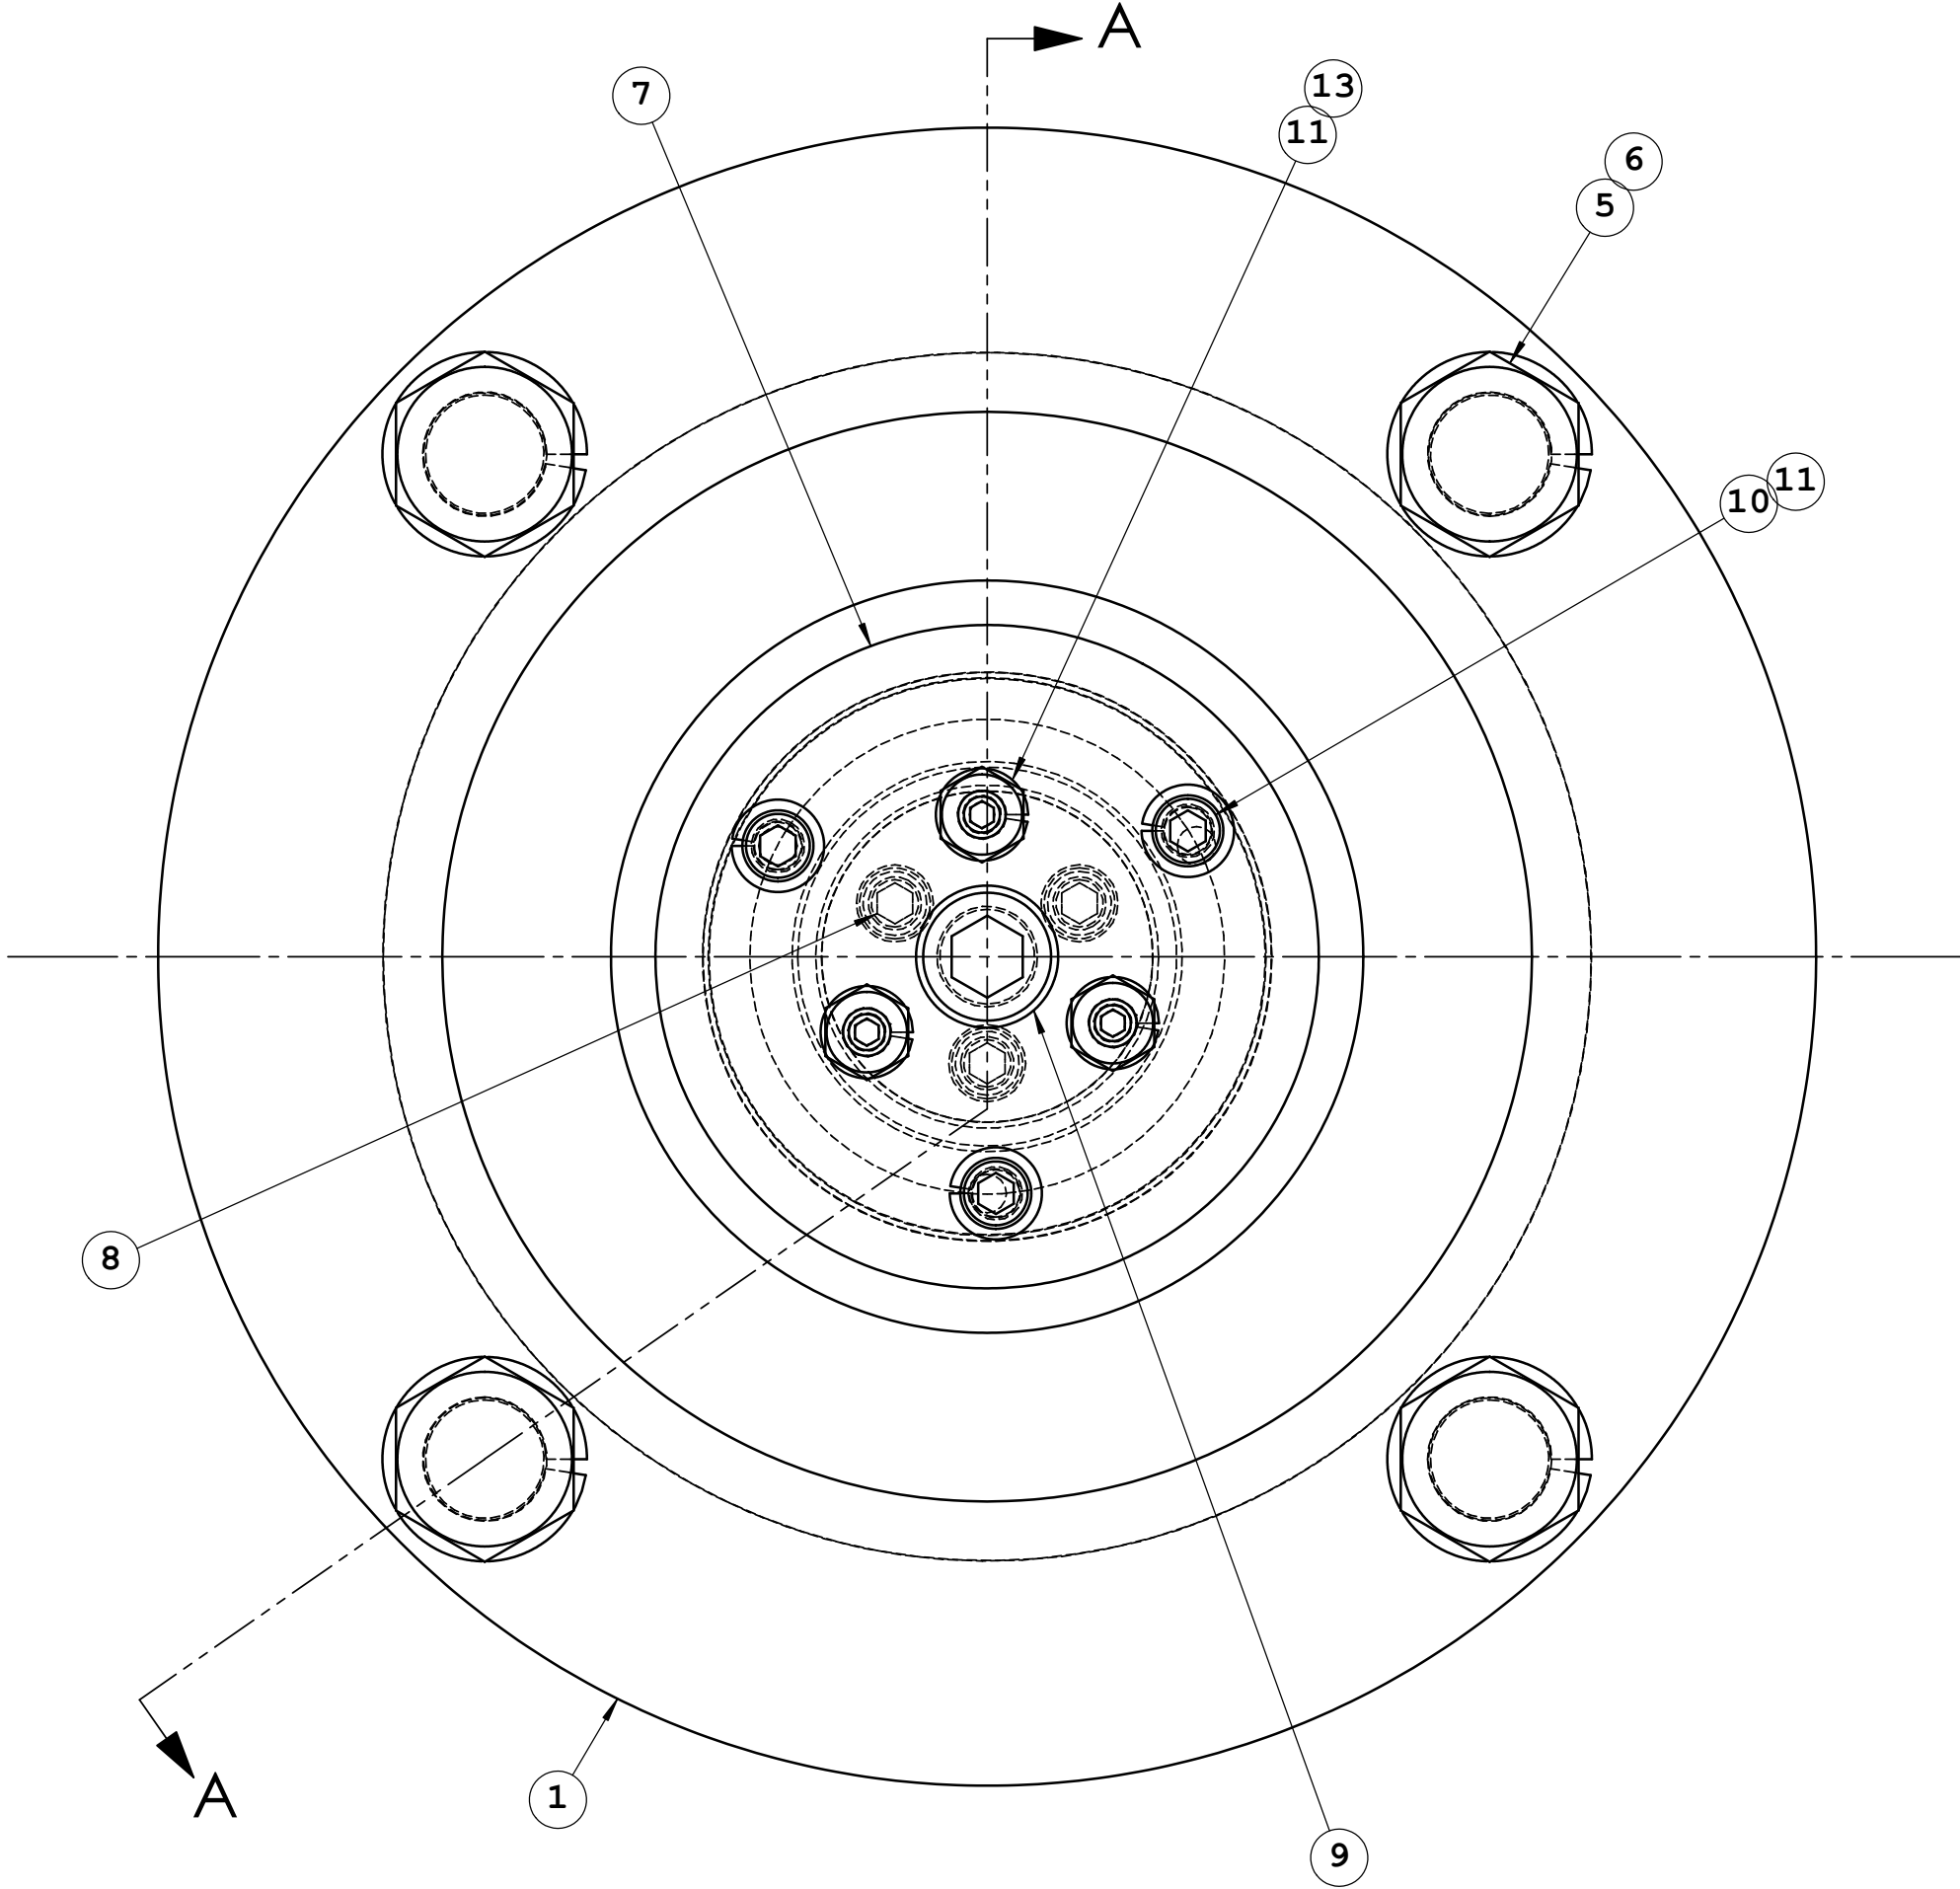

ITEM NO.	QTY.	FILE NO.	DESCRIPTION	PART NO.
1	1	FC900X2-1516	FLANGE BEARING - BROWNING	FC900X2-1516
2	1	1SB-12	INNER SLEEVE	DA200-9-B3
3	1	1SB-11	BEARING SPACER	DA200-9-B2
4	1	1SA-11	SHAFT STOP	DA200-9-A6
5	4	955811214A	HEX HEAD CAP SCREW - M/S, 5/8"-11UNC X 2-1/4" LONG	955811214A
6	4	9058L	LOCKWASHER - 5/8"	9058L
7	1	1sa-5	END CAP	DA200-9-A4
8	3	901420112B	SOCKET HEAD CAP SCREW - M/S, 1/4"-20UNC X 1-1/2" LONG	901420112B
9	1	901213212B	SOCKET HEAD CAP SCREW - M/S, 1/2"-13UNC X 2-1/2" LONG	901213212B
10	3	901420114B	SOCKET HEAD CAP SCREW - M/S, 1/4"-20UNC X 1-1/4" LONG	901420114B
11	6	9014L	LOCKWASHER - M/S, 1/4"	9014L
12	3	9014201E	SOCKET HEAD SET SCREW - M/S, 1/4"-20UNC X 1" LONG	9014201E
13	3	901420JN	HEX HEAD JAM NUT - M/S, 1/4"-20UNC	901420JN

THE INFORMATION CONTAINED IN THIS DRAWING IS SOLE PROPERTY OF THE PEERLESS MACHINERY CORP. ANY REPRODUCTION IN PART OR WHOLE WITHOUT PERMISSION FROM THE PEERLESS MACHINERY CORP. IS PROHIBITED.



DO NOT SCALE DRAWING
TOLERANCES (UNLESS OTHERWISE SPECIFIED)
DECIMALS ±0.01 ±0.005
FRACTIONS ±1/32"
ANGLES ±1°
DRAWN: M. HALL
CHECKED: M. HALL

TITLE:	LH BEARING ASSEMBLY		
MATERIAL:			
SCALE:	DWG. NO.:	CAD FILE:	
1:1	DA200-9-C1	1SC-14	