



DRAWING NUMBER	REAR SEAL ASSY	"A"	"B"	MIXER MODEL
HS4-14-C3-1	HS4-14-B4-1	5	34.5	HS4/6 W/O BEC
HS4-14-C3-2	HS4-14-B4-2	5	39	HS4/6 W/BEC
HS4-14-C3-3	HS4-14-B4-3	5	38.5	HS8 W/O BEC
HS4-14-C3-4	HS4-14-B4-4	5	43	HS8 W/BEC
HS4-14-C3-5	HS4-14-B4-5	5	47.5	HS10 W/O BEC
HS4-14-C3-6	HS4-14-B4-6	5	52	HS10 W/BEC
HS4-14-C3-7	HS4-14-B4-7	5	52.5	HS13 W/O BEC
HS4-14-C3-8	HS4-14-B4-8	5	57	HS13 W/BEC
HS4-14-C3-9	HS4-14-B4-9	5	58.5	HS16/20 W/O BEC
HS4-14-C3-10	HS4-14-B4-10	7	63	HS16/20 W/BEC
HS4-14-C3-11	HS4-14-B4-11	7	69.5	HS24/28 W/O BEC
HS4-14-C3-12	HS4-14-B4-12	7	74	HS24/28 W/BEC
HS4-14-C3-13	HS4-14-B4-13	7	63.5	DA300/350 W/BEC
HS4-14-C3-14	HS4-14-B4-14	5	30.5	DA100 W/O BEC
HS4-14-C3-15	HS4-14-B4-15	5	35	DA100 W/BEC
HS4-14-C3-16	HS4-14-B4-16	5	37.5	DA150 W/O BEC
HS4-14-C3-17	HS4-14-B4-17	5	42	DA150 W/BEC
HS4-14-C3-18	HS4-14-B4-18	5	49.5	DA200/250 W/O BEC
HS4-14-C3-19	HS4-14-B4-19	5	54	DA200/250 W/BEC
HS4-14-C3-20	HS4-14-B4-20	5	57.5	DA300/350 W/O BEC
HS4-14-C3-21	HS4-14-B4-21	5	54.5	DA400 W/O BEC
HS4-14-C3-22	HS4-14-B4-22	5	59	DA400 W/BEC
HS4-14-C3-23	HS4-14-B4-23	7	62.5	DA500 W/O BEC
HS4-14-C3-24	HS4-14-B4-24	7	67	DA500 W/BEC
HS4-14-C3-25	HS4-14-B4-25	7	69.5	DA600 W/O BEC
HS4-14-C3-26	HS4-14-B4-26	7	74	DA600 W/BEC
HS4-14-C3-27	HS4-14-B4-27	5	44.5	5SD W/O BEC
HS4-14-C3-28	HS4-14-B4-28	7	65.5	DA400 W/O BEC

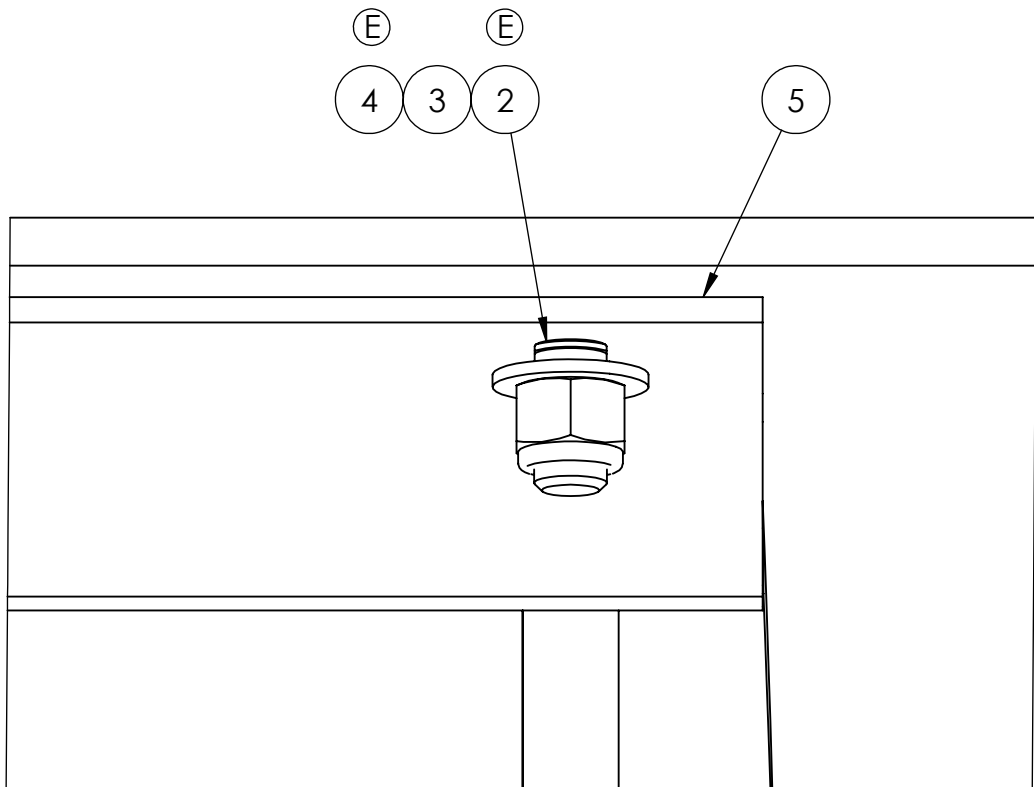

SECTION A-A
SCALE 1 : 1

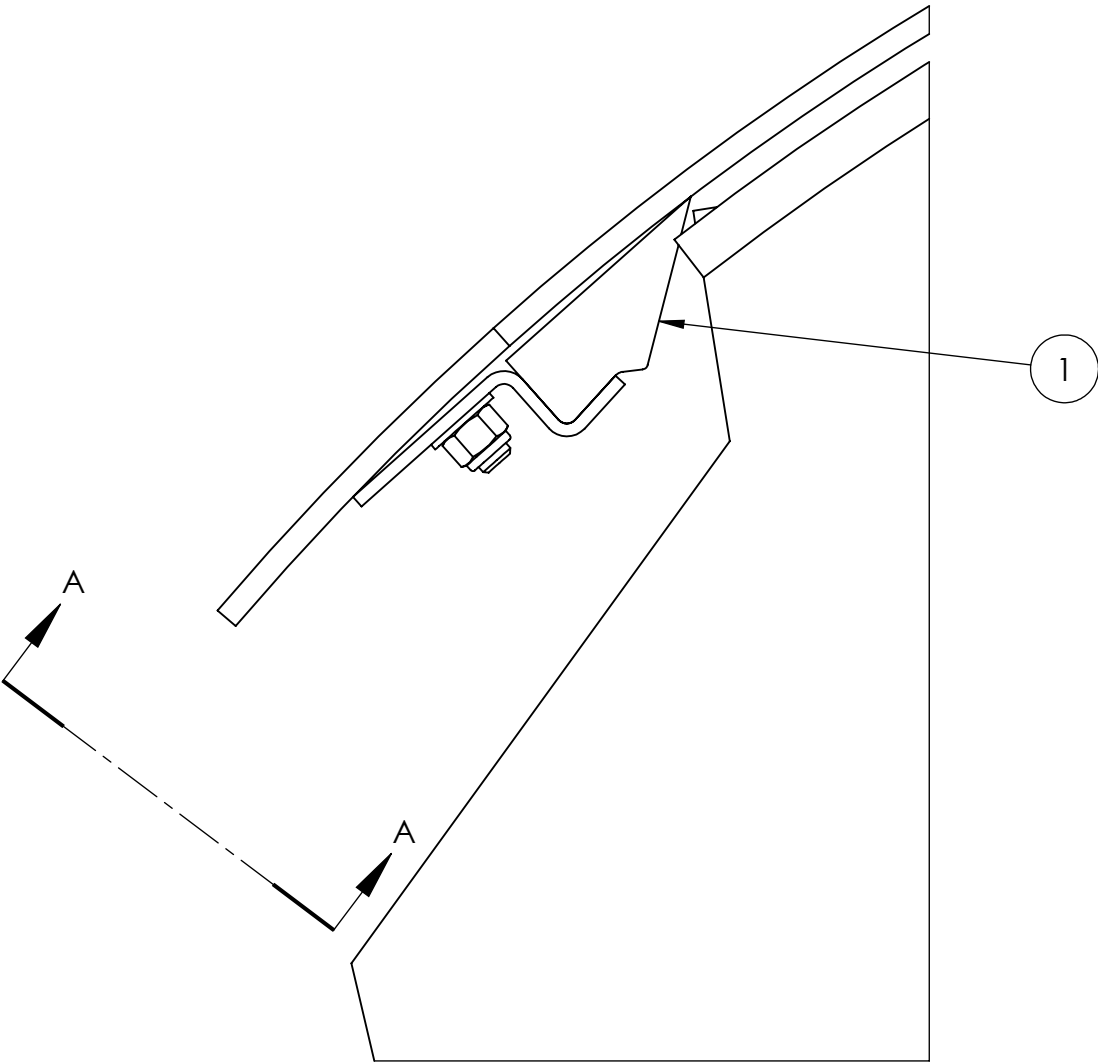

©

NOTE:

- IF $B \leq 48$, $C = 48$
IF $48 < B \leq 60$, $C = 60$
IF $60 < B \leq 74$, $C = 74$
- CUT SEAL RUBBER TO LENGTH
"B" AT ASSY
- AT INSTALLATION, POSITION BOWL
IN FULL UP POSITION (1/16" FROM
CANOPY) WHEN LOCATING SEAL
- WELD STUD SHOULD BE LOCATED
IN END OF SLOT CLOSEST TO SEAL
TO ALLOW FOR FUTURE ADJUSTMENT
AS NEEDED

ITEM NO.	QTY.	PART NUMBER	DESCRIPTION	FILE NUMBER
1	1	50A0103	REAR BOWL SEAL, WHITE FOOD GRADE RUBBER	50A0103
2	A	95381634WS	WS-SST(18-8) 3/8-16 X 0.75 LG	9X3816XWS
3	A	953816SN	STOP NUT SST - 3/8-16UNC	953816SN
4	A	9538W	FW-SST(18-8) 3/8	9XXW
5	1	SEE CHART	REAR SEAL BAR MACH.	B27-102

REVISIONS						
REV.	DCR	ECR	DATE	DESCRIPTION	DRW	APP
A	114		12/28/94	ADDED CHART	WF	MH
B	604		3/28/95	ADDED TO CHART	SH	MH
C	1001		8/3/95	ADDED NOTE	KK	MH
D	2922		9/17/96	ADDED TO CHART, DWG NO WAS SEE CHART	KK	DT
E	37115		9/18/2015	HARDWARE UPDATED TO CURRENT TPG STANDARD, REDRAWN IN SW	RF	RJ

REVISION LEVEL: E		THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISCLOSED IN CONFIDENCE AND IS THE EXCLUSIVE PROPERTY OF THE PEERLESS GROUP (TPG). ANY DISCLOSURE, DISTRIBUTION, AND/OR REPRODUCTION IN PART OR WHOLE WITHOUT PERMISSION FROM TPG IS PROHIBITED			
UNLESS OTHERWISE SPECIFIED Machining Tolerances XXX ± .005 .XX ± .030 X ± .125 Angles ± 1° Weldment / Fabrication Tolerances Mat'l Thickness (1" or less) Length 0 - 12 ± .030 12 - 36 ± .060 Over 36 ± .125 Mat'l Thickness (>1") Length 0 - 12 ± .060 12 - 36 ± .125 Over 36 ± .250 -Dimensions Apply After Finish -Break All Sharp Corner Min = .005 / .015 -Do Not Machine Stock Sizes -All Machining To Be 125(Ra) Max -3rd Angle Projection -Do Not Scale Drawing -Dimensions Shown in Inches		 Peerless ® THE PEERLESS GROUP An ITW Company		500 S. VANDEMARK ROAD SIDNEY, OH 45365-0769 937.492.4158 www.thepeerlessgroup.us	
DESCRIPTION:		REAR SEAL MOUNTING BAR			
MATERIAL:		1:2		SHEET: 1 OF 1	
DRAWN: KR		DATE: 8/17/94		FILE NO:	
APPROVED: RJ		DATE: 8/17/94		C20-57	
DRAWING SIZE: C					