
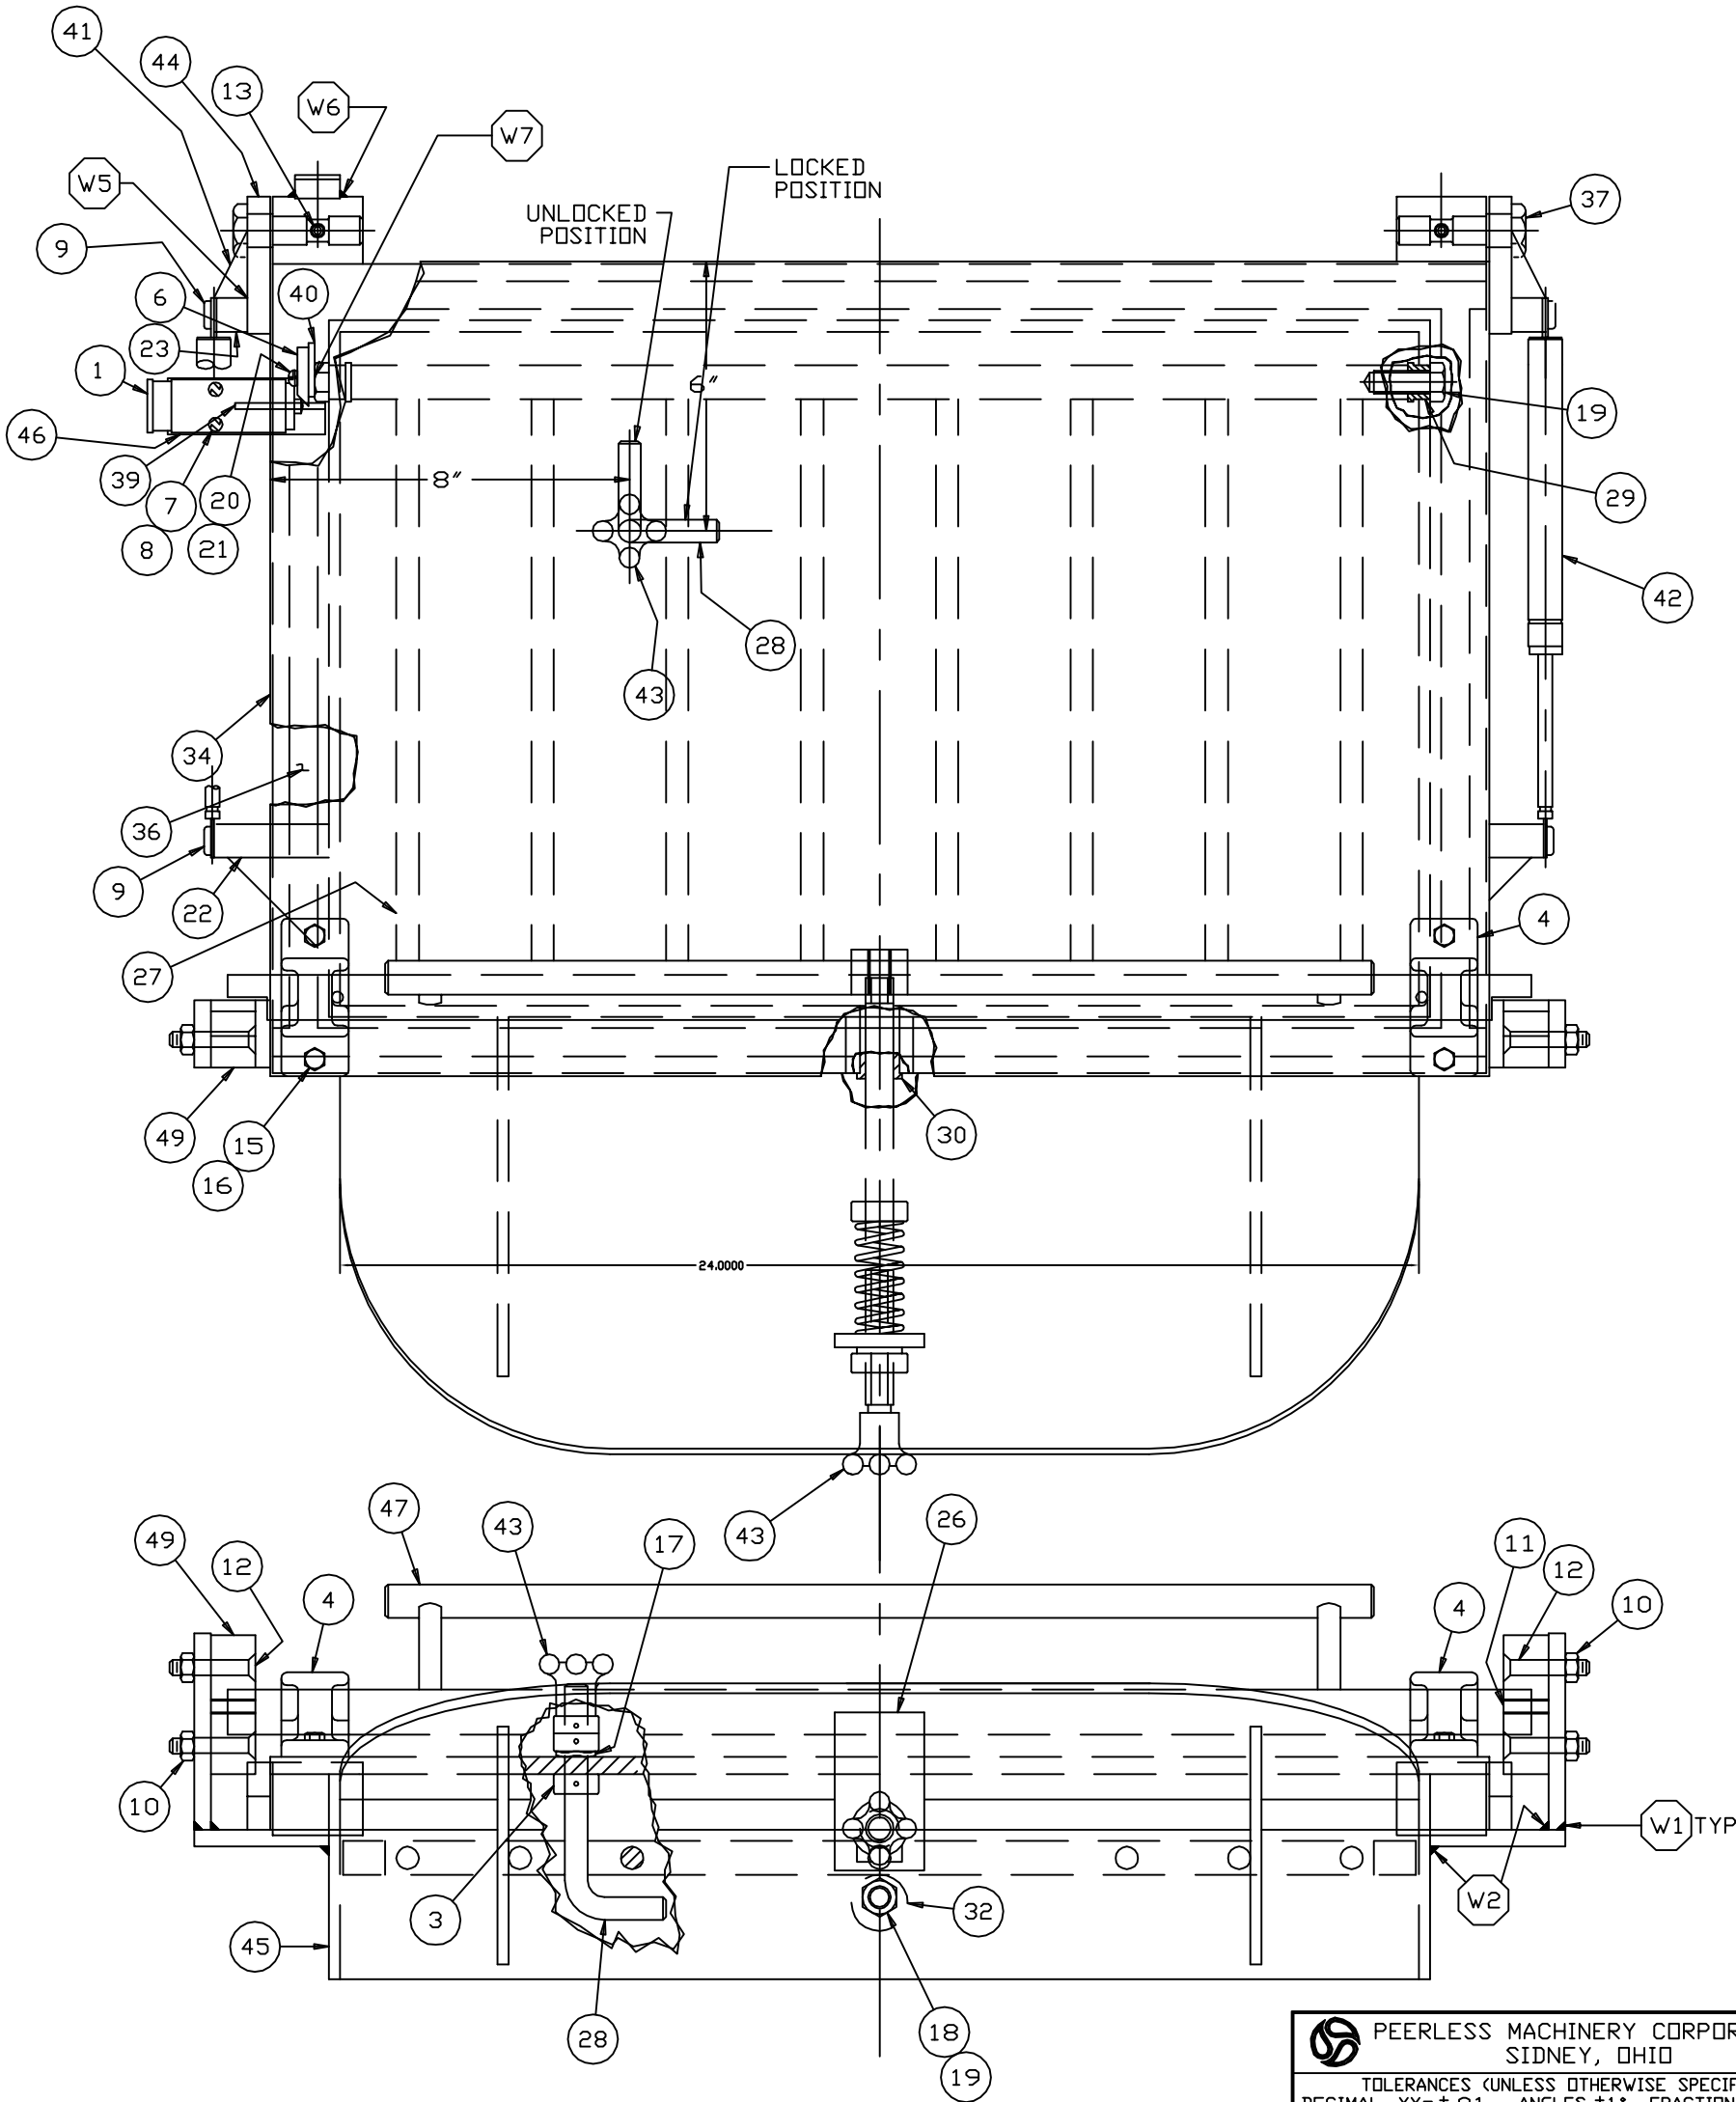


WELD NO.	WELD SYMBOL	NOTES
W1	3/16" GTAW 308	
W2	3/16" GTAW 308	
W3	1/16" GTAW 308	
W4	1/16" GTAW 308	
W5	1/4" GTAW 308	
W6	1/8" GTAW 308	
W7	1/8" GTAW 308	WELD TO BOLT HEAD
W8	1/8" GTAW 308	

INSTALLATION NOTES

- 1) DISCONNECT ELECTRICAL POWER.
- 2) PROTECT INSIDE OF BOWL WITH COVER OR CATCH PAN DURING REMOVABLE AND INSTALLATION.
- 3) REMOVE EXISTING INGREDIENT DOOR AND HARDWARE.
- 4) CENTER NEW DOOR IN BOTH DIRECTIONS OVER EXISTING OPENING.
- 5) WELD NEW DOOR ASSEMBLY IN PLACE, INSIDE AND OUTSIDE. (STAGGER WELD FOR MINIMUM WARPAGE)
- 6) CUT INSIDE OPENING TO MATCH. (PLASMA ARC)
- 7) GRIND AND POLISH.
- 8) CONNECT SAFETY SWITCH TO INTERRUPT ALL AGITATOR OPERATION.
- 9) REMOVE SET SCREW FROM ALL SET COLARS.

49	2	10KB-32-1	LATCH DOG
48	2	10KB-32-2	LATCH DOG SUPPORT
47	1	13683-18	CLAMP HANDLE ASSEMBLY
46	1	16RF-23-A15	SAFETY SWITCH MOUNTING PLATE
45	1	16RF-23-C2	INGREDIENT DOOR FRAME WELDMENT
44	2	20RS-23-A2	HINGE BLOCK
43	2	21113	HAND KNOB - ALUMINUM
42	2	4417	GAS SPRING LIFT SUPPORT
41	2	5027X112G	GUSSET - 1/4" X 3/4" S/S FLAT X 1 1/2" TRIANGLE
40	1	5057X114X114	SAFETY SWITCH ACTUATOR - 10GA S/S X 1 1/4" X 1 1/4"
39	1	5057X12X2	SAFETY SWITCH PLATE GUSSET - 10GA STAIN X 1/2" X 2" (CUT DIAGONAL)
38	1	5141X1	DOOR STOP - 1/2" X 1/2" S/S FLAT X 1" LONG
37	2	516-1035	HINGE PIN
36	5	516-1092	DOOR SEAL TUBING (QTY IN FEET)
35	2	5230X2G	GUSSET - 1/4" X 2" S/S FLAT X 2" TRIANGLE
34	1	5501X15X21	INGREDIENT DOOR PLATE - 3/8" S/S PLATE X 15 1/8" X 21 1/8"
33	1	5557X12X1	ROTATION STOP PLATE - 10GA S/S X 1/2" X 1"
32	1	620-1089	LATCH CAM
31	1	620-1090	LATCH BAR
30	1	620-1099	GRID LATCH BUSHING
29	2	620-1100	GRID HINGE BUSHING
28	1	620-1103	GRID LIFT HOOK
27	1	620-1105	SAFETY GRID ASSEMBLY
26	1	620-1107	LATCH BAR BRACE
25	1	620-1113	DOOR LATCH BOSS
24	1	620-1114	DOOR LATCH BOSS
23	2	620-1148	LIFT SUPPORT MOUNTING BLOCK
22	2	620-1149	LIFT SUPPORT MOUNTING BLOCK
21	2	95103212CT	RD HD TAMPER RESISTANT SCREW - #10-32UNF X 1/2"
20	2	9510L	LOCKWASHER - S/S #10
19	3	951213114A	HEX HD CAP SCREW - S/S 1/2"-13UNC X 1 1/4"
18	1	9512L	LOCKWASHER - S/S 1/2"
17	1	9512WW	WAVE WASHER - S/S 1/2"
16	4	95142034A	HEX HD CAP SCREW - S/S 1/4"-20UNC X 3/4"
15	4	9514L	LOCKWASHER - S/S 1/4"
14	6	9518114RP	S/S ROLL PINS - 1/8" X 1 1/4" S/S
13	2	955161812E	SOCKET HD SET SCREW - S/S 5/16"-18UNC X 1/2" CUP POINT
12	4	9551618134D	FLAT HD CAP SCREW - S/S 5/16"-18UNC X 1 3/4"
11	2	955161834E	SOCKET HD CAP SCREW - S/S 5/16"-18UNC X 3/4"
10	4	9551618SN	STOP NUT - S/S 5/16"-18UNC
9	4	9551638SH	STAIN SHOULDER SCREW - 5/16" X 3/8" LONG
8	2	95832114CT	RD HD TAMPER RESISTANT SCREW - #8-32UNC X 1 1/4"
7	2	958L	LOCKWASHER - S/S #8
6	1	HS20-23-A6	SAFETY SWITCH ACTUATING CAM
5	1	LC-120M-6	COMPRESSION SPRING - LEE
4	2	M3B-198-1	CLAMP BEARING ASSEMBLY
3	1	SSC-1/2	SET COLLAR - 1/2" DIA BORE
2	2	SSC-5/8	SET COLLAR - 5/8" DIA BORE
1	1	XCK-P110	MINI SAFETY INTERLOCK SWITCH
ITEM	QTY	PART NUMBER	DESCRIPTION

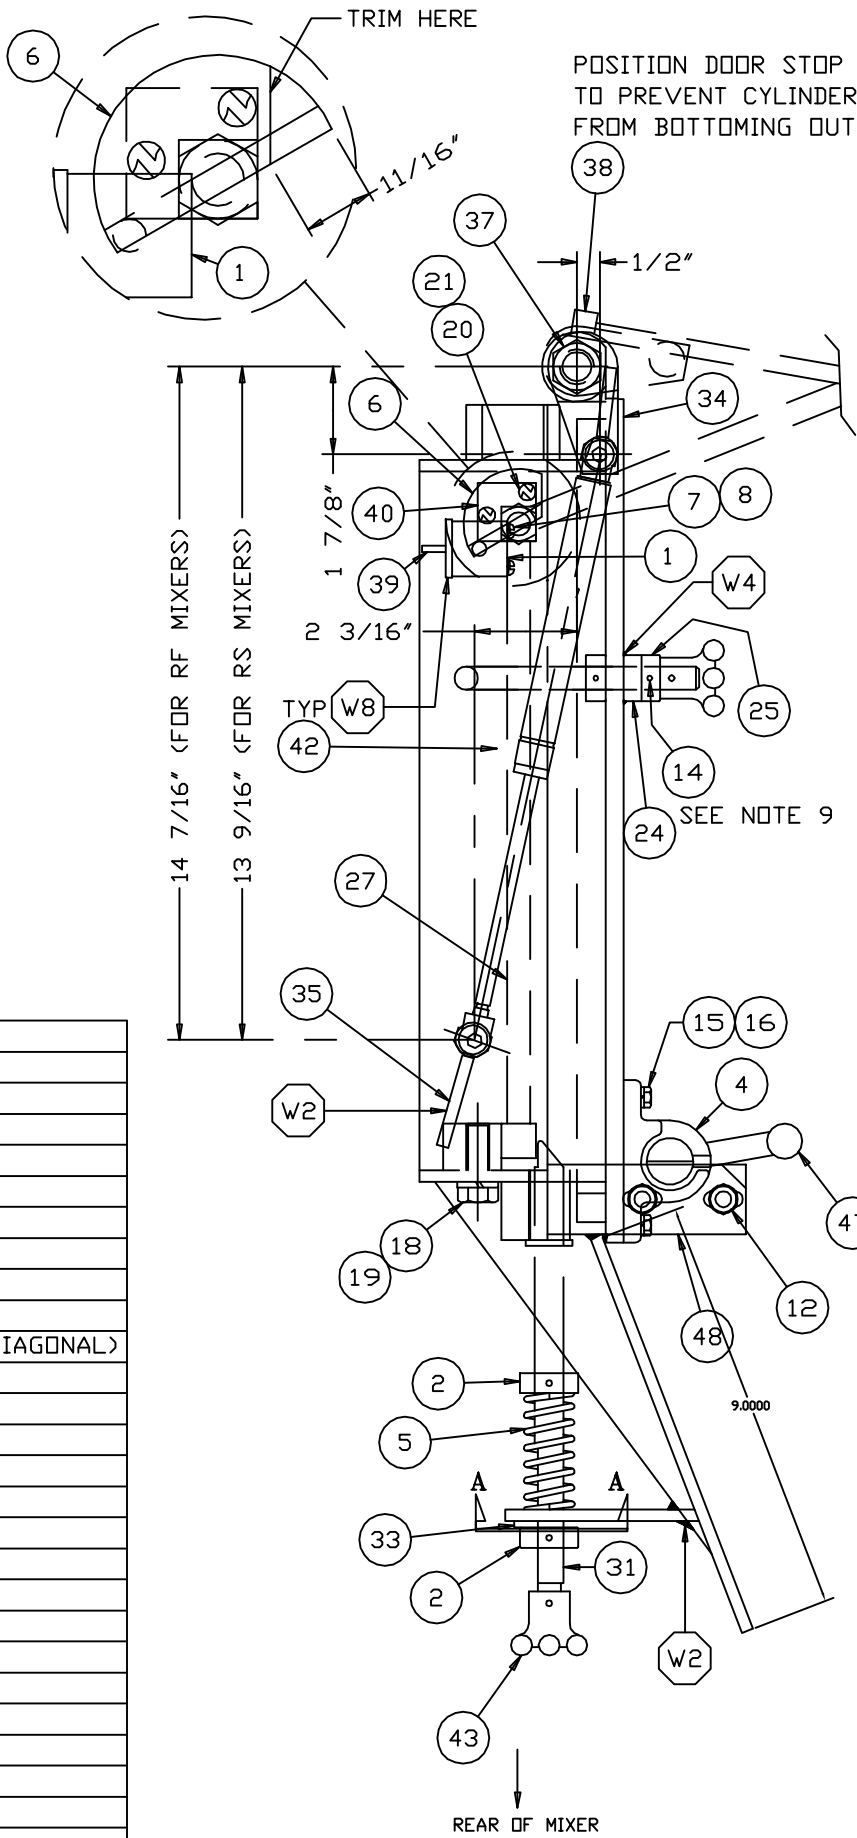

PEERLESS MACHINERY CORPORATION SIDNEY, OHIO		
TOLERANCES (UNLESS OTHERWISE SPECIFIED) DECIMAL .XX = ±.01 ANGLES ±1° FRACTIONAL ±1/32 BREAK ALL EDGES		
MATERIAL	DATE	APPROVED BY
SCALE	TITLE	DT
3:8	INGREDIENT DOOR ASSEMBLY	
DATE	DRAWING NUMBER	FILE NUMBER
8/13/97	16RF-23-D16	D39-49