

**Heat and Control, Inc.
Packaging Service Department
Technical Bulletin PS TB62909**

TSC-RS

Belt Cover Replacement Procedure



Figure 1: New Covers completely Installed

Date: 06.29.09

HEAT AND CONTROL

Packaging Service Department:

Heat and Control, Inc.
187 West Airport Rd
Lititz, PA 17543 USA
Phone: 800.648.5313
Fax: 717.519.5260
www.heatandcontrol.com

Corporate Headquarters:

Heat and Control, Inc.
21121 Cabot Blvd
Hayward, CA 94545 USA
Phone: 800.227.5980
Fax: 510.259.0600
www.heatandcontrol.com

Applicable Equipment:

Job #'s 08/14320 to 08/14325 Serial #'s 808 to 867

Problem:

The excessive buildup of product inside the belt cover interferes with the operation of the TSC-RS.

Solution:

Replace the existing cover with a new design making it more difficult for product to enter. Product that enters the cover will be able to escape via the open bottom.

Parts List (HP63-100A):

128-3373-01 COVER:TIMING BELT:1

128-3370-00 COVER:TIMING BELT:2

128-3376-01 COVER:TIMING BELT:3

014-3996-09 CROSS HEAD:HEX BOLTS WITIMING H (Quantity 6)

**Notes:**

Modification kits have been provided to upgrade all units. Please dispose of old covers after replacement.

Heat and Control contacts:

Jim Tate: Packaging Service Manager 717-259-5240 jamest@heatandcontrol.com

Bob Moze: Packaging Parts Manager 510-259-7816 bobm@heatandcontrol.com

Mark Longhi: Technical Sales Coordinator 510-259-7730 markl@heatandcontrol.com

Randy Blair: Product Development Manager 510-259-7735 randyb@heatandcontrol.com



Figure 3: Removing Original Covers

Remove original covers by removing these three bolts.



Figure 4: Covers Removed


The belt is revealed when covers have been removed.



Install Cover-1 using two bolts.



Install Cover-2 using two bolts.

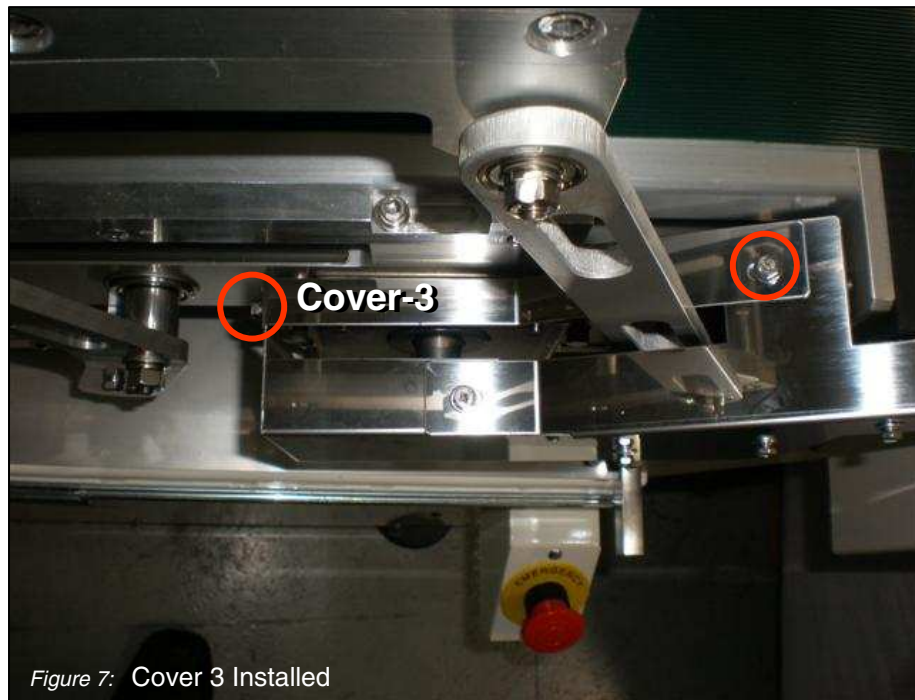

Install *Cover-3* using two bolts.



New Covers completely installed

Note: All blue plastic has been removed from the covers.