


Introduction

BB-2/3T Case Taper Overview

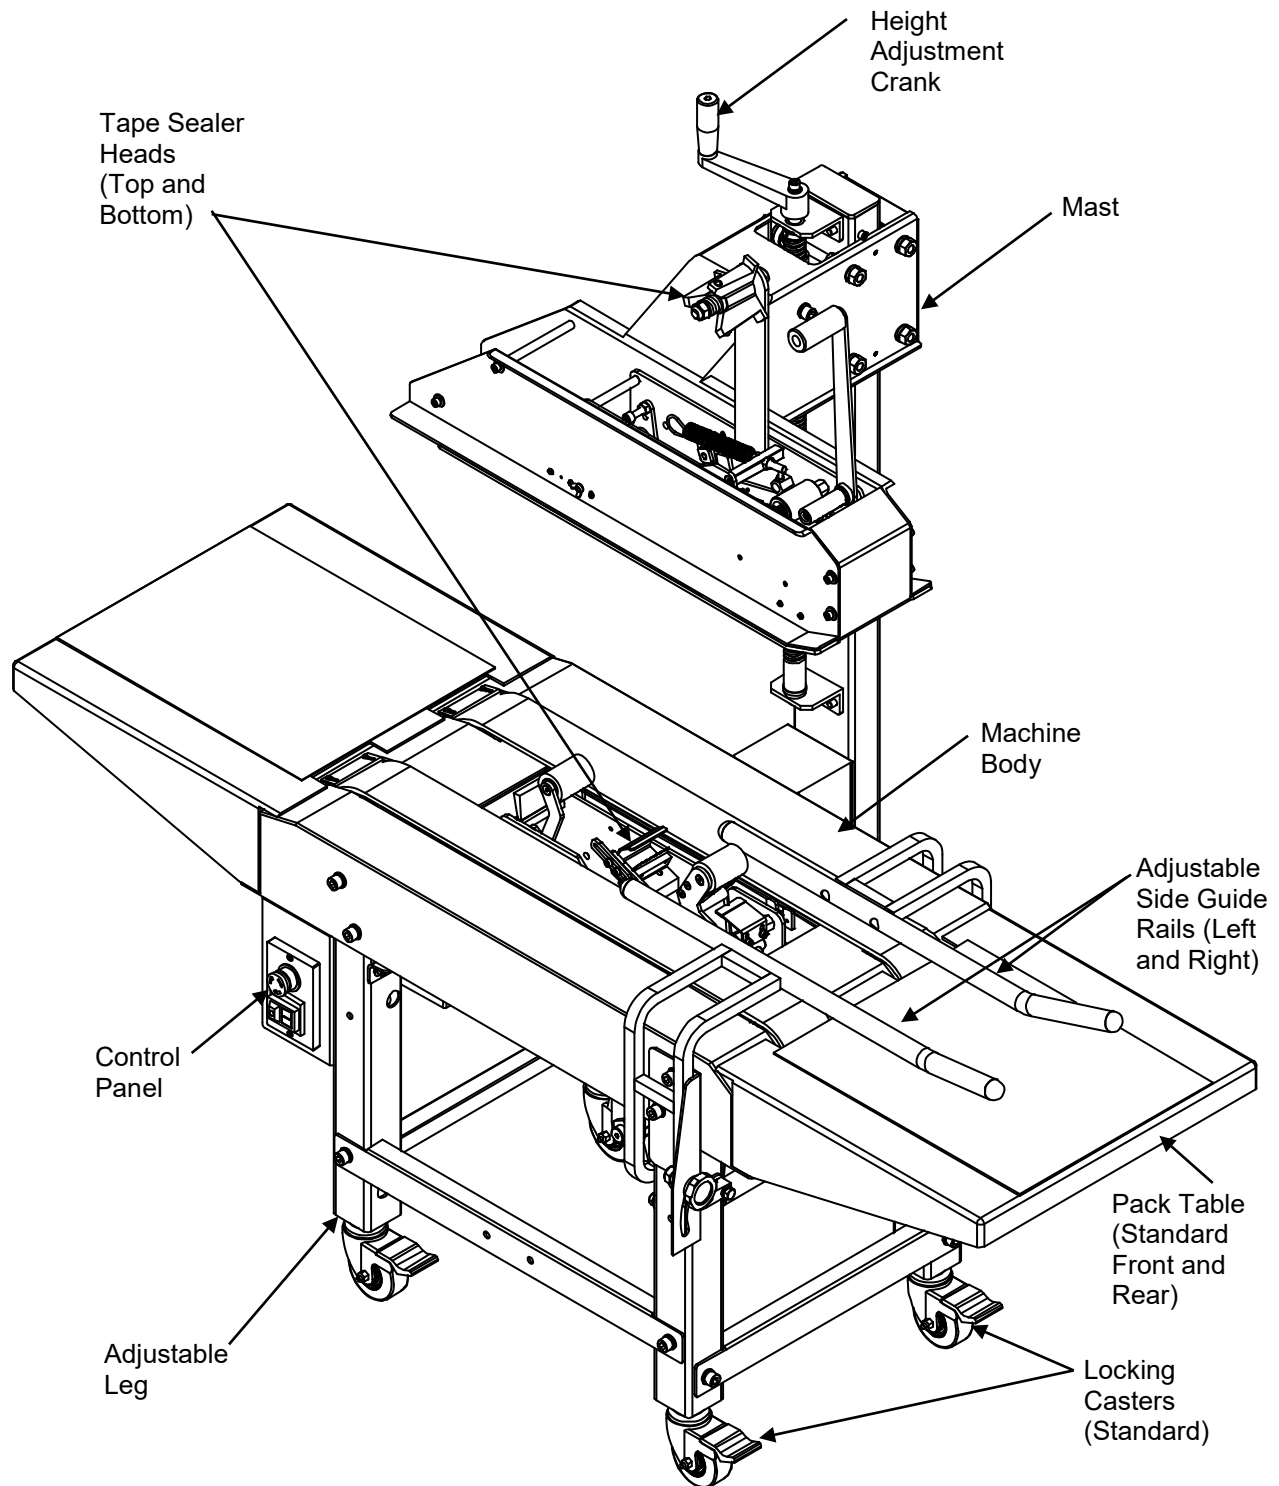

Specifications

Model	BB-2T
Tape	2 inches (50 mm) tape width, up to 15 inches (36 cm) diameter rolls
Belt Speed	60 feet/min (19 m/min)
Capacity	(L) 6 inches (15 cm) to unlimited (W) 6 to 21 inches (15 to 53.3 cm) (H) 4 to 20.5 inches (10 to 52 cm)
Conveyor Height Adjustment	21.3 to 27.2 inches (54.1 to 69.1 cm) without casters 25.8 to 31.7 inches (65.5 to 80.5 cm) with casters
Electrical Requirements	110 VAC, 60 Hz, 6A
Power Consumption	200 W
Air Requirements	None
Machine Size	(L) 64 inches (162 cm) (W) 28 inches (79 cm) (H) 56.75 inches (144 cm) without casters (H) 60.6 inches (154 cm) with casters
Sound Level	60 dB
Machine Net Weight	260 lbs.

Options

- 3 inch Tape Head — Accepts three inch wide tape rolls. (BB-3T)
- Top Squeezer — Designed to stabilize the box and push top flaps together for easier taping.

Dimensions

Dimensions shown are in inches.

