



6 TECHNICAL SPECIFICATIONS

6.1 General Machine Information:


MULTI BAG G

➤ Dimensions

Length with conveyor: 3483 mm

Width: 1601 mm

Height: 3653 mm

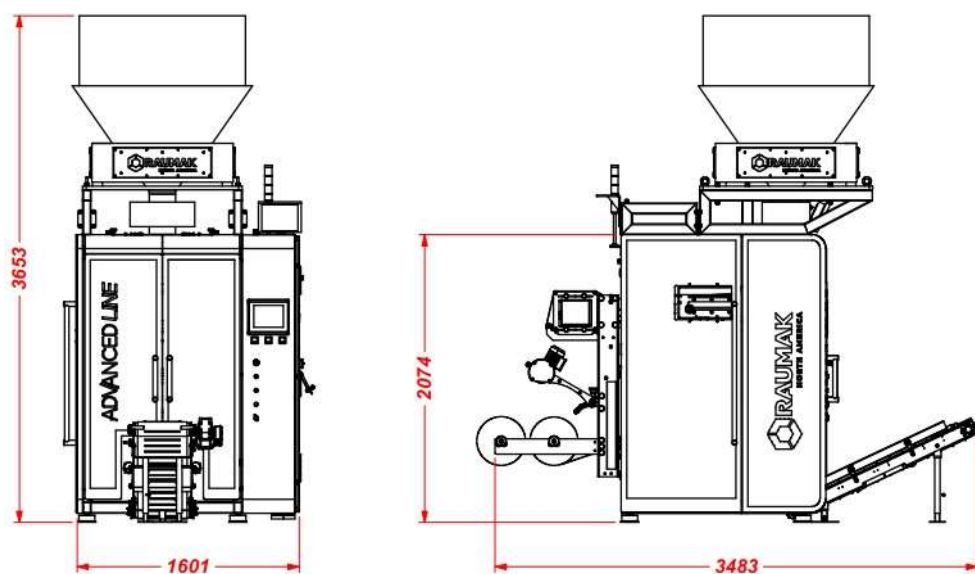

Gross Weight (approximate): 2960 kg

➤ Film (Reel) Specifications:

Outer diameter of coil (max.) 350 mm

Reel width (max.) 580 mm

Recommended film thickness 50 μ m

Reel weight (max.) 40 kg

Heat sealable film, i.e it melts with the application of temperature.



➤ **Electrical:**

Voltage: 208 VAC

Control voltage: 24 VCC

Frequency: 60 Hz

Equipment power: See nameplate

➤ **Pneumatic:**

Working pressure: 6 - 7 Bar

Consumption up to: 800 l/min

ATTENTION:

- The equipment was manufactured according to the electrical specifications determined in the sales order. Before powering it up, check the nameplate of your equipment or the sales order and confirm voltage and frequency;
- The electrical power grid must be stable and may have a maximum voltage oscillation of up to 5%;
- Compressed air network should guarantee a constant pressure of 6 - 7 Bar;
- The equipment must be properly grounded.

6.2 Equipment Technical Data

- Equipment controlled via PLC;
- Adjustments, tests, visualization, production statistics performed via HMI;
- Seal system with pulsating heating;
- Controlled gluing temperature via HMI;
- Package cutting performed by a knife driven by pneumatic cylinders;
- Fasteners: Stainless Steel;
- Equipped with pneumatic components from FESTO;
- Equipped with SEW/Allen Bradley electronic components;
- Structure painted with electrostatic powder coating, increasing durability and resistance to external influences.



6.3 Production

The MULTI BAG G is a high-production machine that can absorb a demand as shown in the table below. Under favorable conditions. This equipment was specifically designed, manufactured and tested to work with the product specified at purchase, i.e., it is prepared to offer the best conditions, however, the maximum production of the equipment is conditioned to factors such as:

Product	Dosage	Unroll Spool width	Production
Tortillas	1 oz	300 mm	55 ppm
Tortillas	5 oz	460 mm	50 ppm
Tortillas	12 oz	585 mm	30 ppm
Tortillas	15 oz	585 mm	25 ppm

- Equipment parameters;
- Dosing system;
- Type of package;
- Quantity of product mass per package;
- Arrangement of the product in the package;
- Properties and behavior of the product;
- Mass of the package;
- Maintenance and proper operation of the machine, such as cleaning, maintenance of moving parts and the electronic system of the machine;
- Proper power supply;
- Adequate compressed air network.