


Remote Control Unit Components



Top Display Setting Bar

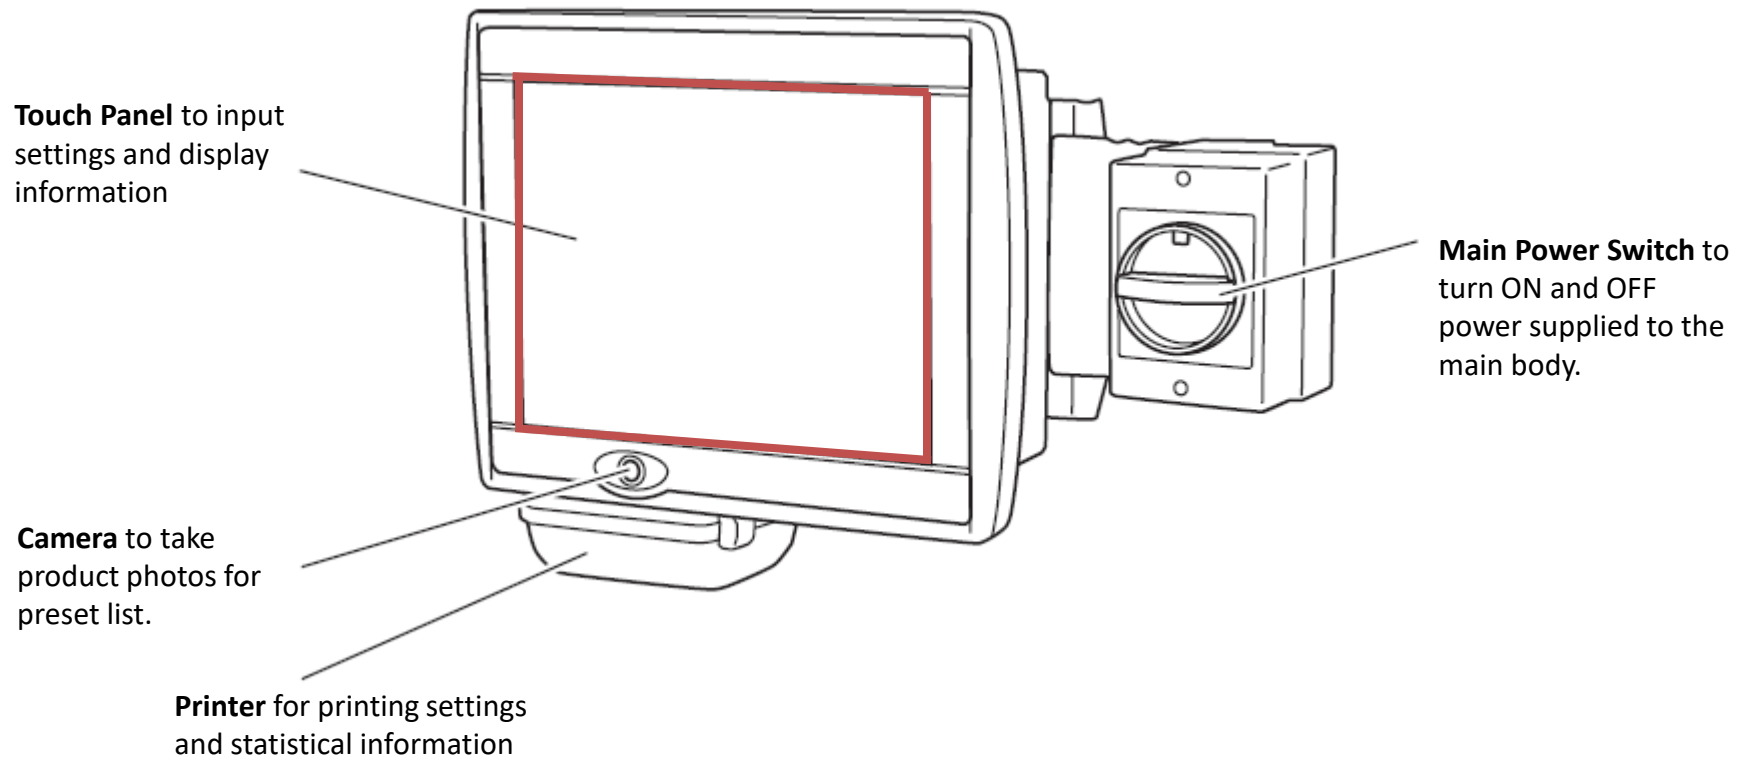

Start-Up Assistant

*See page 10 for image specific

Language Select

*See page 11 for image specific

Level Select

*See page 12 for image specific

Help Key

*See page 17 for image specific

Information Display

*Do not access or make changes unless contacting factory service representatives!

Message Board

*See page 9 for image specific




Date / Time

*See page 16 for image specific

Control Panel



*See page 13-15 for image specific

Top Display Setting Bar ~ Message Board

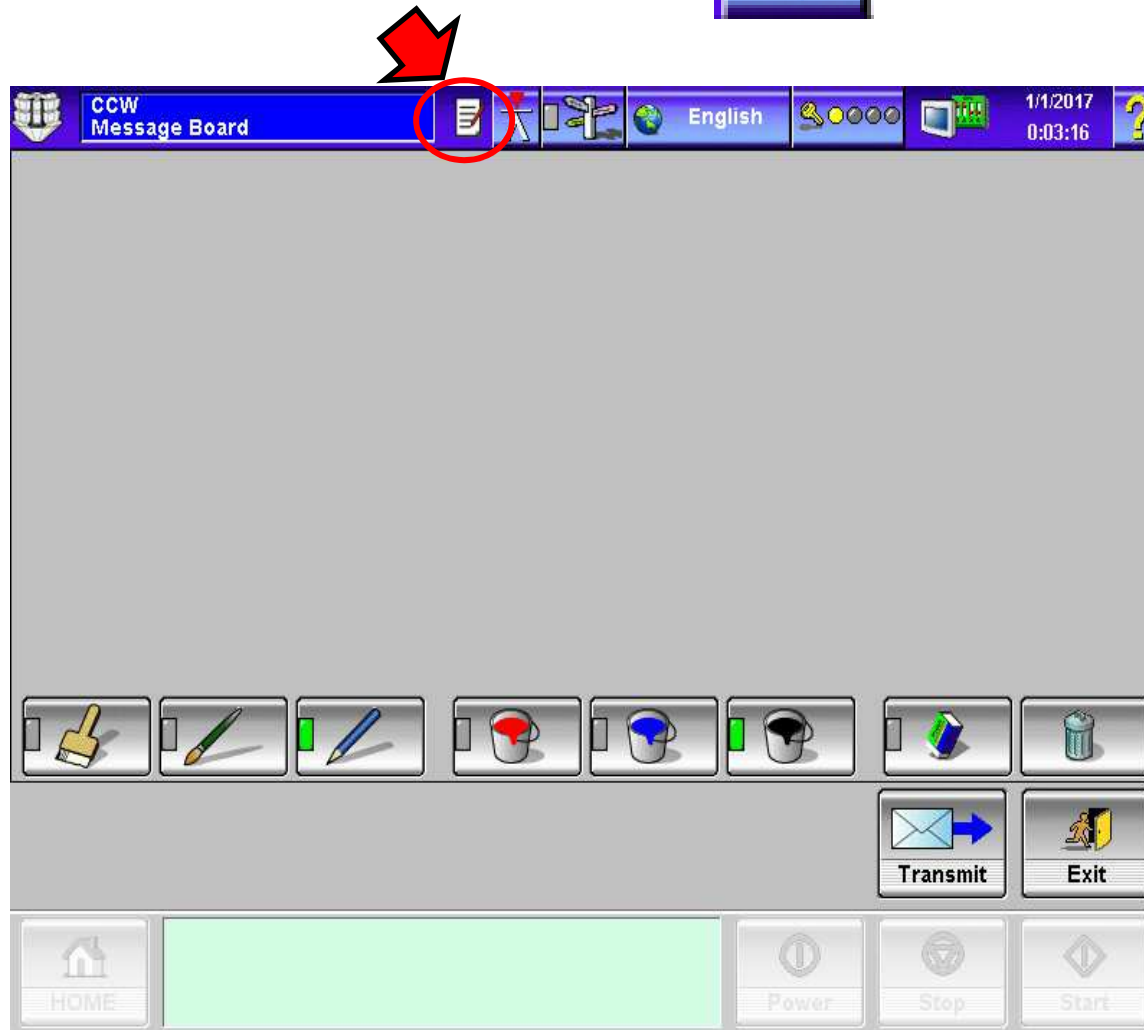


Top Display Setting Bar

~ Start-Up Assistant

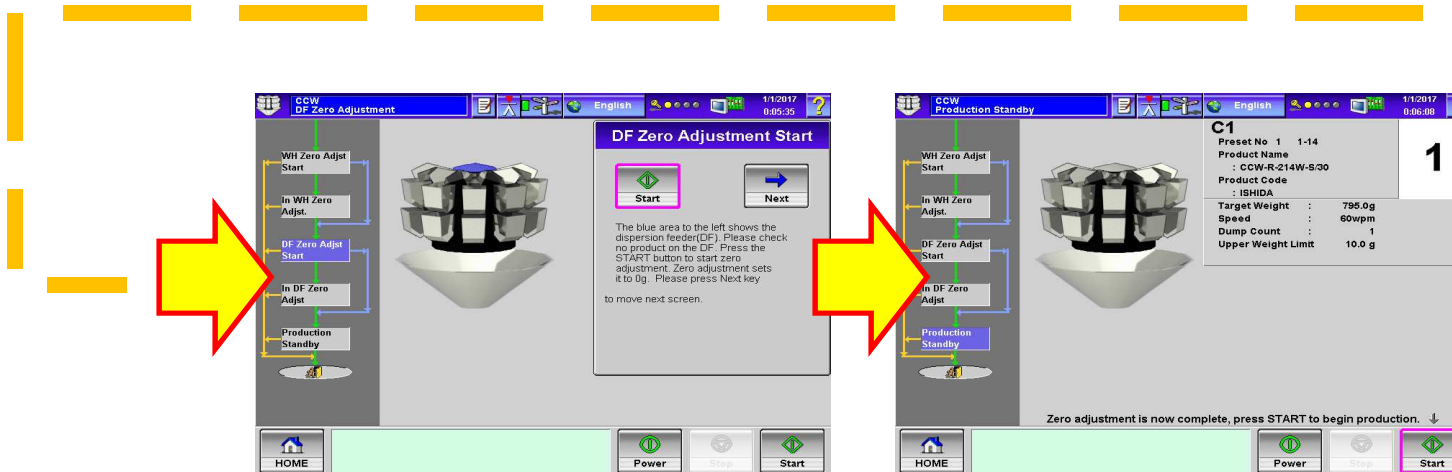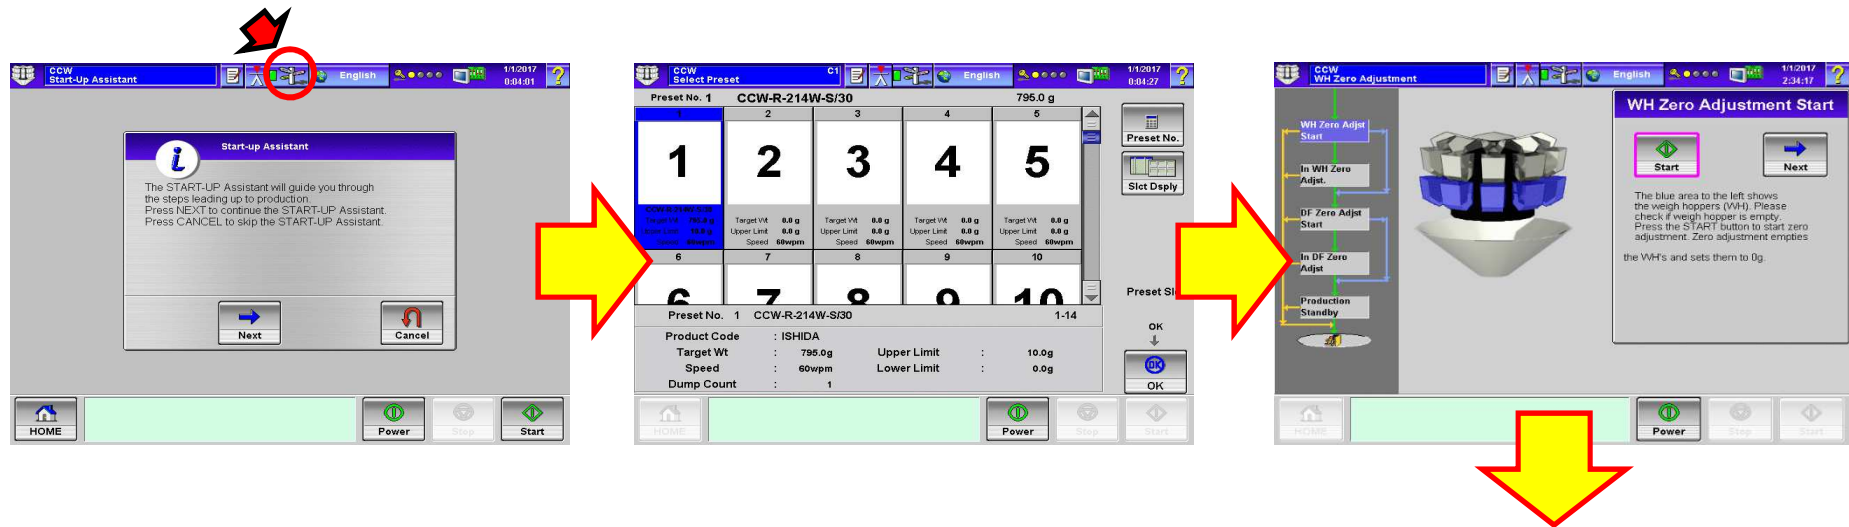


Top Display Setting Bar

~ Language Select

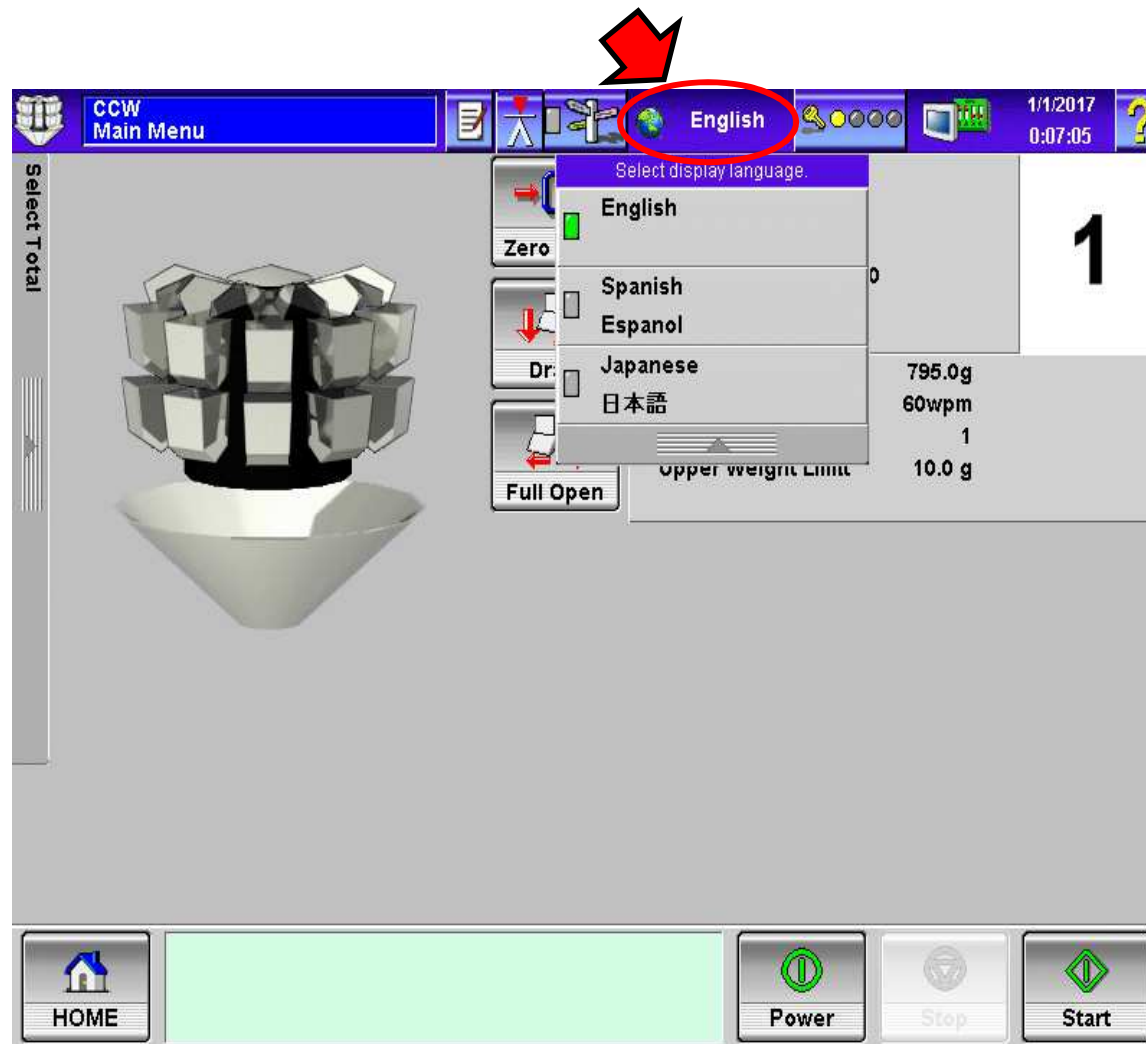

Top Display Setting Bar

~ Level Select

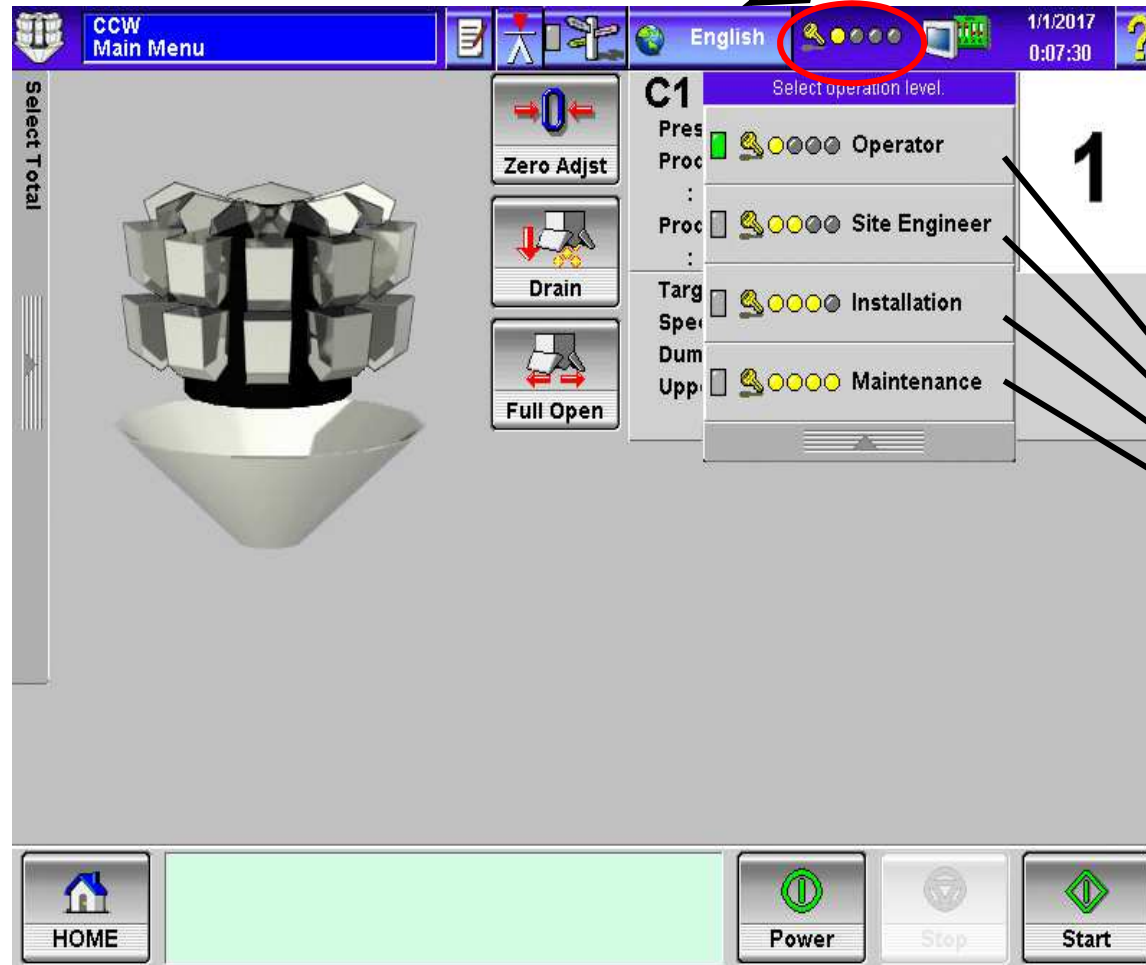

*Default Password
Operator – NA
Site Engineer – 1
Installation – 2
Maintenance – 123

Control Panel

~ Screen Control



Backlight Saver


*Toggle between Full Brightness or Half Brightness.
NOTE: will change from Full Brightness to Half Brightness only when Backlight Saver ON Time has been met.

Backlight Saver ON Time

*When Remote Control Screen has not been "touched" for a designated time period (time set on the BL Saver ON Time), the Backlight Saver will change from Full Brightness to Half Brightness. NOTE: Can set BL Saver ON Time to OFF which will not allow the Backlight Saver to become activated.

Touch Panel Tune-Up

*Must be in Maintenance level to perform Touch Panel Calibration.

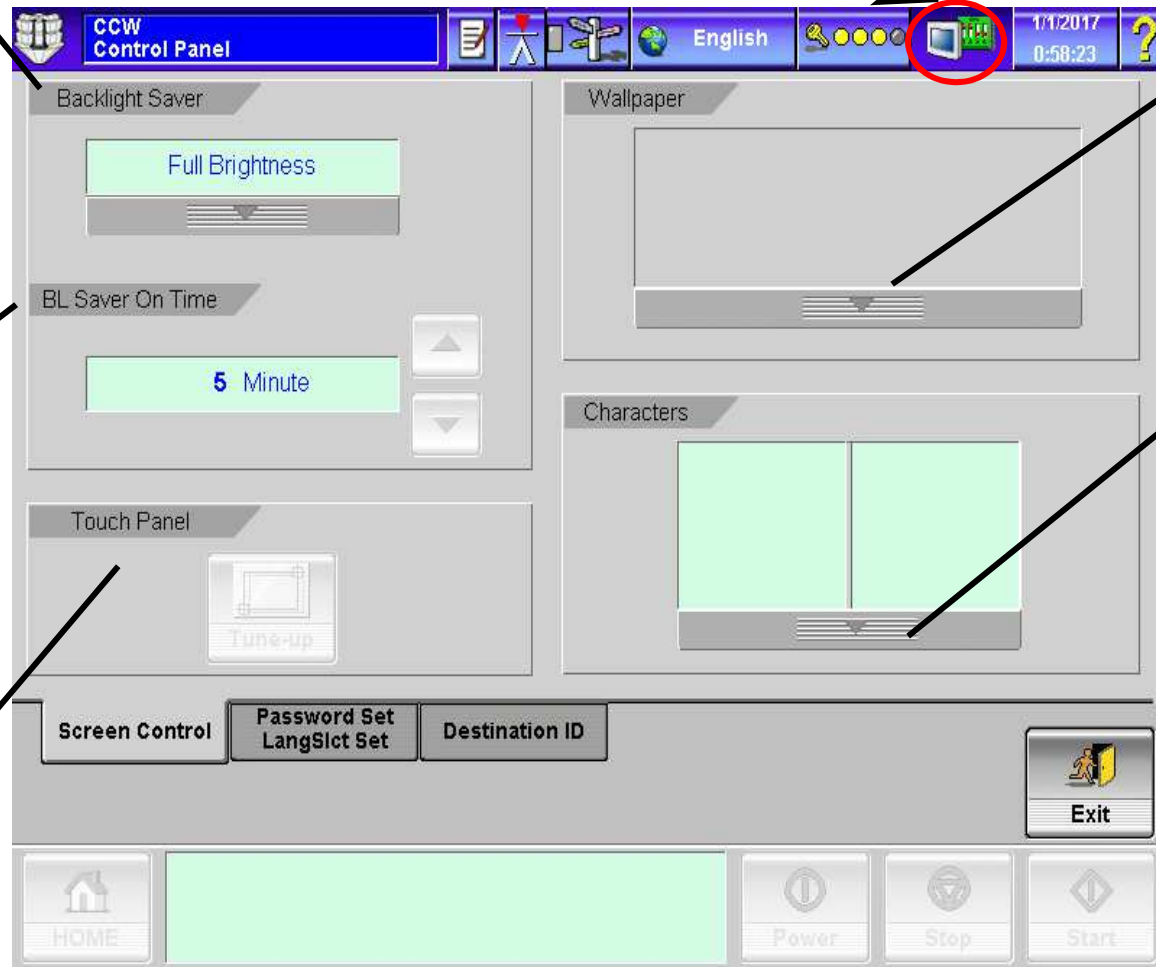


Wallpaper

*Can select between pre-established wallpaper designs.

Characters

*Can select between pre-established character designs.

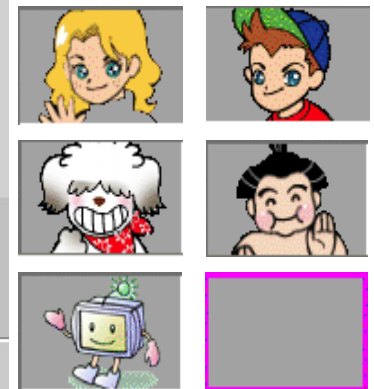


Control Panel

~ Password Set/Language Select Set



Change Language
*Must be in Maintenance level to change/Select Display Language

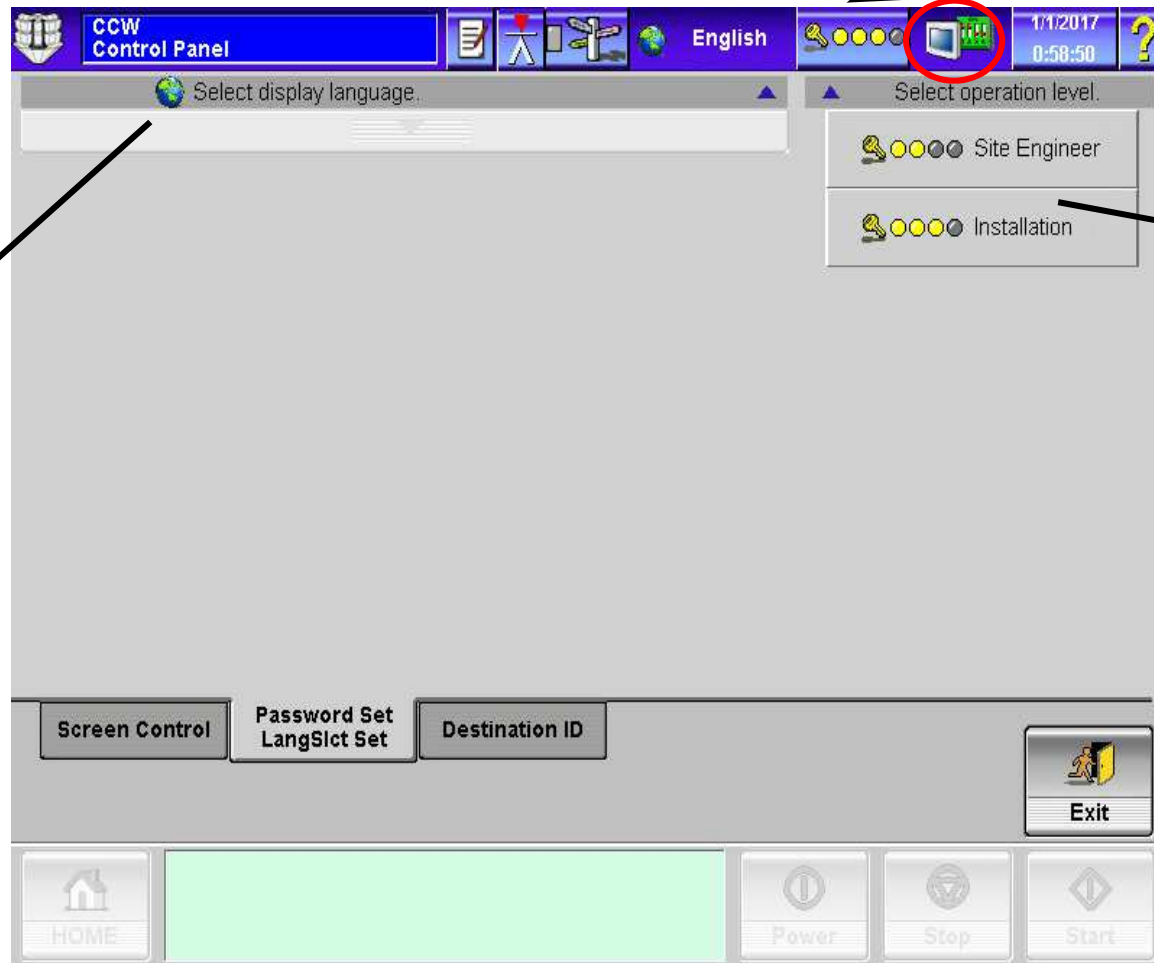

Change Passwords
*Must be in Maintenance level to change Maintenance Password



Control Panel

~ Destination ID



Set Destination for Output Key

*When set to OFF, will not be able to transmit information to any source.

*When Printer is selected, will send OUTPUT data to printer.

*When CF/USB is selected, will send OUTPUT data to CF/USB card. NOTE: information will be accessible as a TXT file and will open as an Excel file or with note pad.

The screenshot shows the CCW Control Panel interface. At the top, there is a blue header bar with the text "CCW Control Panel" and several icons. A red circle highlights the "Destination ID" icon in the top bar, with a red arrow pointing to it from above. Below the header, the main area is divided into two sections: "Destination ID" and "E-mail Setting".

In the "Destination ID" section, there is a list of options: "Off", "Printer", "CF/USB", and "E-mail". The "Off" option is currently selected and highlighted in blue. To the right of the "E-mail" option, there is a text field containing "da.co.jp/".

In the "E-mail Setting" section, there are several fields: "Subject" (containing "Test Mail(v)"), "TO 1", "TO 2", "FROM", "CC", and "SMTP host".

At the bottom of the interface, there are several buttons: "Screen Control", "Password Set", "LangSlt Set", "Destination ID", and "Exit". There is also a "HOME" button and three buttons labeled "Power", "Stop", and "Start".

Set Address for E-Mail

Control Panel

~ Date and Time Set

1/1/2017
1:00:27

HEAT AND CONTROL



CCW
Time Setting

English

1/1/2017
1:00:27

Date

Sun	Mon	Tue	Wed	Thu	Fri	Sat
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	31				

Time

Year: 2017, Month: 1, Day: 1

Hour: 01, Minute: 00

Date Format: Month/Day/Year

Setting Exit


HOME Power Stop Start

Setting

*After adjusting the Year, Month, Day, Hour, Minute and Date Format select the Setting tab to SAVE the changes/updates.

Control Panel

~ Question

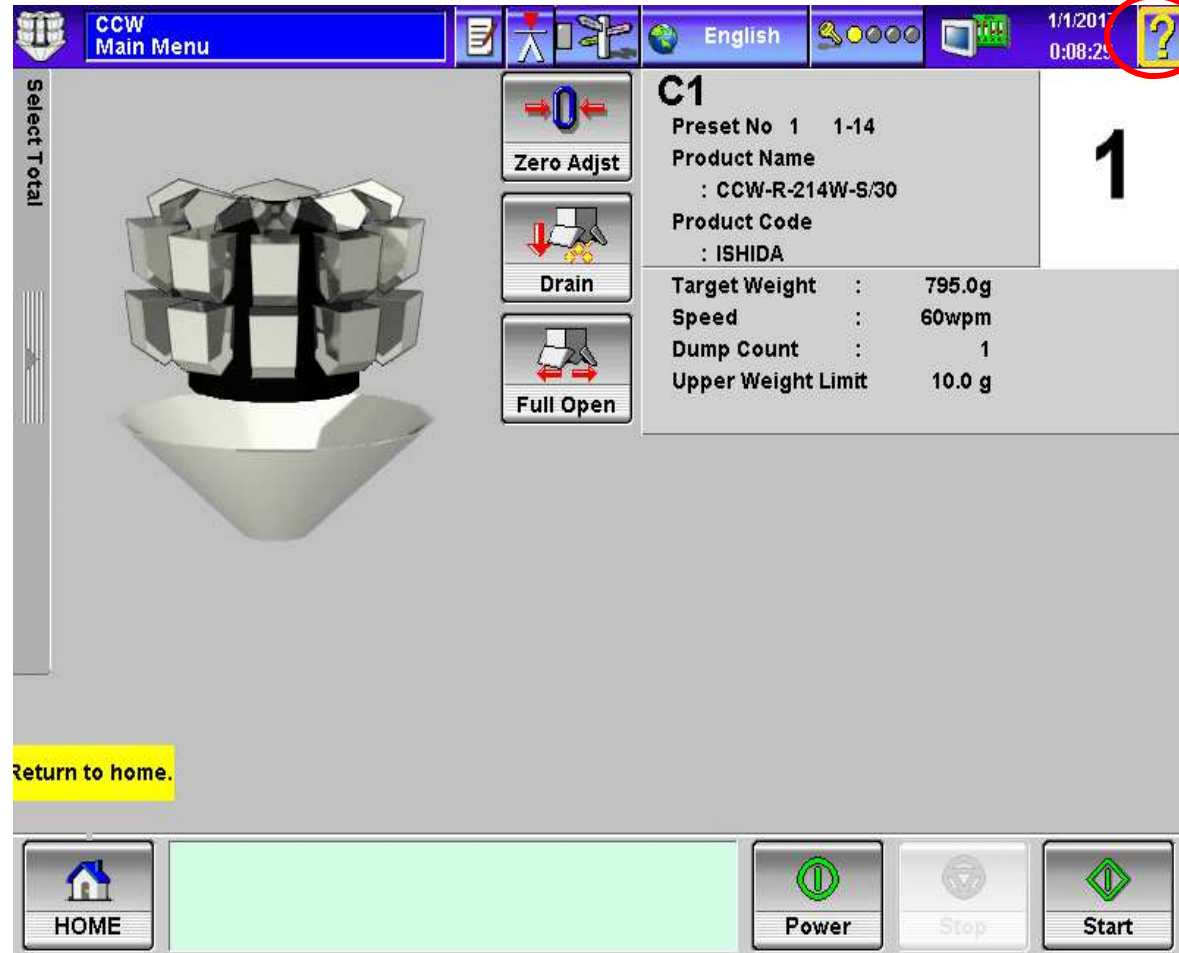

*Select the Question key to provide description of unfamiliar icons. NOTE: To provide information on other unfamiliar icons, selection of Question Key must be re-selected.