


CHAPTER 2

OPTIONS CHECKLIST

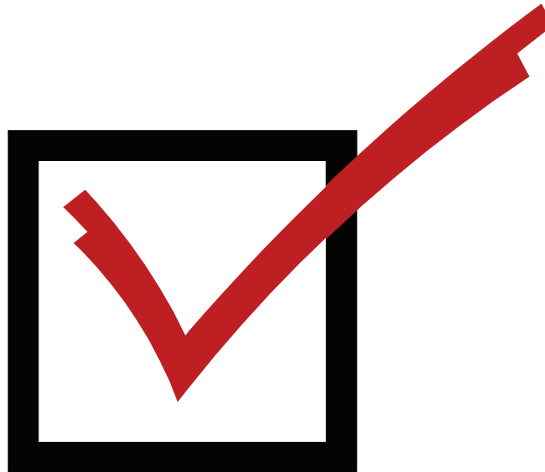

CHAPTER 2
TABLE OF CONTENTS

OPTIONS CHECKLIST

2-1 Options Checklist	.	.	.	.	.	.	.	.	.	2-3
Warranty	.	.	.	.	.	.	.	.	.	2-8

SECTION 2-1 OPTIONS CHECKLIST

Below is a list of optional features available on **Peerless** mixers. The optional features supplied on your mixer have been marked with a check. When reading the manual, refer to this list for options that apply to your mixer.

Mixer S/N: 201031 Mixer Model Number: DA150FD+

OPTIONAL FEATURE	SECTION REF.	COMMENTS
☒ Agitator Shaft Bearing Assembly ☐ Standard ☒ Heavy Duty	Sec. 5-9	Roller bearings that support left-hand end of both agitator shafts.
☐ Auto Central Lube System	Sec. 5-7	Lubricates mixer bearings automatically.
☐ Automatic Page Change Feature	Sec. 4-10-1	Changes VCP pages while mixer is running.
☒ Belt Drive--Gates Polychain Preset Tension Value <u>10515</u> N	Sec. 5-11-2	Replaces sprockets and chain on drive system.
☒ Bowl-End Cooling	Sec. 7-3	Includes jacketing on bowl ends only.
☐ Bowl Drain Valve	Sec. 6-4	Drains cleaning water from bowl.

SECTION 2-1

OPTIONAL FEATURE	SECTION REF.	COMMENTS
_____ Bowl Switch--Mid-position	Sec. 4-8	Stops bowl for hand loading ingredients or a sponge dough.
_____ Canopy Scraper	Sec. 6-1-2	Used to clean dough from canopy when tilting.
_____ Custom Control Panel	Sec. 8-1	Special operator control panel per customer request.
_____ Cycle-Over-Horn	Sec. 4-9	Sounds at end of High Speed cycle.
_____ Drive Motor Gearhead	Sec. 5-11-3	Standard motor, coupling and reducer are replaced with drive motor directly attached to a reducer.
_____ Dynamic Brake--Drive Motor	Sec. 8-1	Stops mixer agitator from coasting.
_____ Flour Gate--Sliding Gate Style	Sec. 3-7	Replaces standard Butterfly valve.
_____ Jog and Tilt Feature	Sec. 4-5	Lowers bowl while agitator is jogging.
_____ Legs--Bolt On	Sec. 3-4	Allows legs to be shipped loose for field installation.
_____ Legs--Special Size	Sec. 3-4	See Certified Data Sheet .

SECTION 2-1

OPTIONAL FEATURE	SECTION REF.	COMMENTS
_____ Lifting Lugs	Sec. 3-1-3	Used to pick up mixer with a crane.
_____ Mix-By-Energy Control System	Sec. 8-1	Allows mixer run cycle to be controlled by energy inputted into dough.
_____ Multiple Product Mixer Control Feature (MPMCF)	Sec. 4-10-4	Allows operator to enter and edit timer preset values for multiple products. Standard on ACBMs .
_____ NEMA 4 Enclosure	Sec. 3-5	Painted electrical enclosure, water tight.
<u>X</u> NEMA 4X Enclosure	Sec. 3-5	Stainless steel electrical enclosure, water tight.
_____ Over Tilt	Sec. 5-9	Bowl tilt greater than 120 degrees. Requires special rotary actuator.
<u>X</u> Programmable Logic Controller (PLC)-- Non Standard	Sec. 5-11-1	Replaces standard Allen-Bradley SLC 500 PLC.
PLC Supplied <u>SLC5/05E</u>		
_____ Refrigeration Control Circuit	Sec. 4-6	Controls refrigerant flow to mixer.
<u>X</u> Refrigeration System-- Indirect Liquid	Sec. 7-2-1	Bowl jacket cooling using glycol, brine or water.

SECTION 2-1

OPTIONAL FEATURE	SECTION REF.	COMMENTS
☐ Safety Ingredient Door ☐ Manual ☐ Air Operated ☐ Removable Grid	Sec. 4-5-2	Opening in canopy used to inspect or add minor ingredients.
☒ Timers ☐ Digital ☐ Mechanical ☒ VCP	Sec. 4-2	Eagle digital/mechanical timers, or see Video Control Panel.
☐ Trough Hooks (Tro Hooks) ☐ Manual ☐ Pneumatic	Sec. 4-8	Latch tro in place just before discharging dough.
☐ Vibration Isolation (Vibro Pads)	Sec. 3-4	Used under legs of mixer to reduce shock loads and vibration.
☒ Video Control Panel (VCP) ☐ Cutler-Hammer IDT PanelMate® 1000 ☐ Cutler-Hammer IDT PanelMate® 3000 ☒ Allen-Bradley PanelView® 550	Sec. 4-10	Replaces conventional pushbutton mixer control panel.

SECTION 2-1

 X Other Section 8-5 Garlock Agitator Shaft Seals Cleaning

 Other _____

 Other _____

 Other _____

PEERLESS MACHINERY CORPORATION WARRANTY

The machinery manufactured by **PEERLESS MACHINERY CORPORATION (Peerless)** will be free from defects in material and workmanship for a period of one (1) year after shipment of machinery from **Peerless**. The machinery, when properly installed, operated, maintained and managed by Buyer will operate as described in the manual furnished by **Peerless**.

At the discretion of **Peerless**, **Peerless** will replace (F.O.B. place of shipment) or repair, excluding installation, any defective material or workmanship, provided that **Peerless** receives written notice of the claimed defect within one (1) year after shipment of the machinery from **Peerless**.

Peerless reserves the right to inspect any claimed defect, repair defective equipment or install replacement parts and to perform any adjustment incident to satisfactory operation of the machinery.

This Warranty shall not apply to any equipment that has been improperly operated, maintained, repaired or altered by persons other than **Peerless**. Equipment damaged by misuse, neglect or accident shall not be covered by this Warranty.

THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING A WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WHICH EXTEND BEYOND THOSE SET FORTH HEREIN. THE LIABILITY OF **PEERLESS** SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT OF ANY DEFECTIVE EQUIPMENT WHICH REPAIR OR REPLACEMENT SHALL BE THE BUYER'S SOLE AND EXCLUSIVE REMEDY. **PEERLESS** SHALL NOT BE LIABLE FOR LOSS OF PROFITS, INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR FAILURE OF THE EQUIPMENT TO COMPLY WITH ANY FEDERAL, STATE OR LOCAL LAWS. **PEERLESS** SHALL, UNDER NO CIRCUMSTANCES BE LIABLE FOR THE COST OF RAW MATERIALS USED OR LOST IN TESTING OR EXPERIMENTAL OPERATIONS OF ANY EQUIPMENT SOLD, WHETHER SUCH TESTING OR EXPERIMENTATION IS COMPLETED UNDER THE SUPERVISION OF A REPRESENTATIVE OF **PEERLESS** OR OF AN EMPLOYEE OR OTHER REPRESENTATIVE OR THE BUYER.