




Peerless Machinery Corporation
Vandemark Road
Sidney, Ohio 45365
Telephone 513-492-4158
Telex 28-8047

DOUBLE ARM MIXERS (DOUBLE END DRIVE)

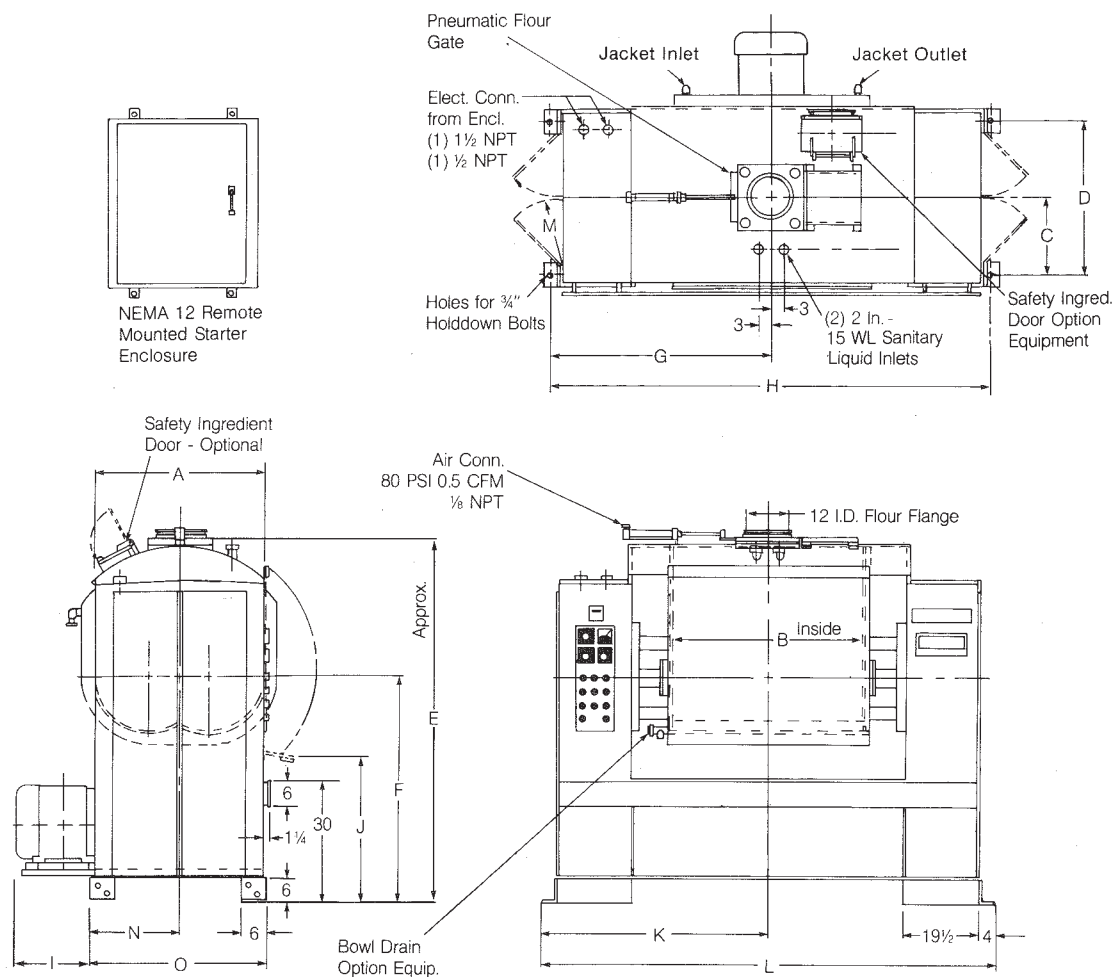

DIMENSIONS (Inches)

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DA 150	42	35	19	38	88	55½	49	98	17	34½	51	102	16½	22	44
DA 200	42	47	19	38	88	55½	55	110	18½	34½	57	114	16½	22	44
DA 250	44	47	20	40	92½	57	55	110	20	34½	57	114	17½	23	46
DA 300	44	55	20	40	92½	57	59	118	23	34½	61	122	17½	23	46
DA 350	44	55	20	40	97	58½	59	118	26	35½	61	122	17½	23	46
DA 400	56	58	24	48	105½	64½	59	118	25	37	61	122	23½	29	58
DA 500	56	68	24	48	110	66	64	128	26	38	66	132	23½	29	58
DA 600	60	68	26	52	119	69	64	128	35	40	66	132	25½	31	62

SPECIFICATIONS

MODEL	Mixing Capacity (Gallons)	Working Capacity (Cu. Ft.)	Total Bowl Volume (Cu. Ft.)	Approx. Cap. Wire Cut Cookie Dough (Pounds)	Drive Motor H.P.	Total Load (KVA)	Tilt Motor H.P.	Approx. Floor Load (Lbs./Sq. Ft.)	Net Weight (Pounds)	Approx. Shipping Weight (Pounds)
DA 150	150	22.7	30.6	1100	20/10	20	1	3540	10,400	10,800
DA 200	200	30.3	44.6	1500	30/15	30	1	3970	11,400	11,900
DA 250	250	33.7	46.8	1700	40/20	40	1.5	4170	11,900	12,400
DA 300	300	41.5	62.5	2050	50/25	50	1.5	4480	12,550	13,100
DA 350	350	45.8	65.3	2350	60/30	60	1.5	4925	13,650	14,200
DA 400	400	51.0	70	2600	75/37.5	75	5	4740	21,100	21,800
DA 500	500	66.3	86.5	3300	100/50	100	5	5170	22,550	23,300
DA 600	600	82.0	100.5	4000	125/62.5	125	5	5720	24,600	25,400

AGITATOR SPEEDS

- 40 RPM low / 80 RPM high
- 35 RPM low / 70 RPM high
- Special custom speeds (optional)

Due to the continuous effort of Peerless Engineering to improve performance, dimensional data and specifications are subject to change without notice.