



	LOCATION A
FULL LOAD AMP (FLA)	27.4 A
VOLTAGE REQUIREMENT	110 V / 1 Ø / 60 Hz
BPA DISCONNECT SIZE	30 A
BPA DISCONNECT FUSE SIZE	30 A
MINIMUM AIR PRESSURE	N/A
MINIMUM AIR FLOW	N/A
AIRLINE CONNECTION	N/A

SAFETY ZONES



E-STOP NUMBER	SHUTS DOWN
1	COLLATOR

SERIAL NUMBERS

SERIAL NUMBER	ENCLOSURE
5595	COLLATOR 1
5596	COLLATOR 2

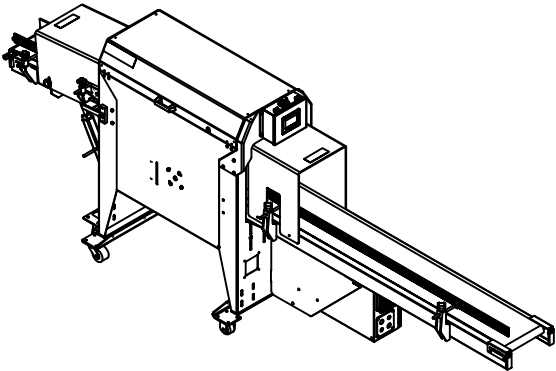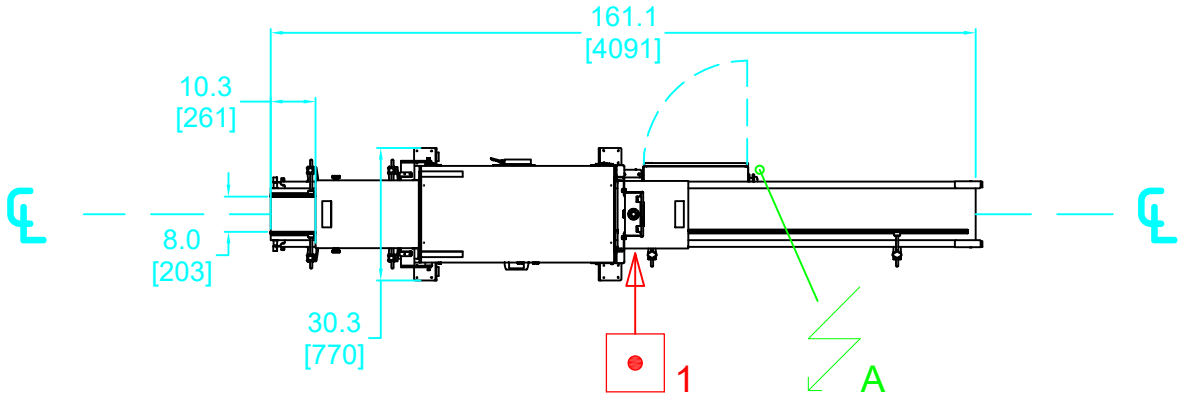

FLOW 

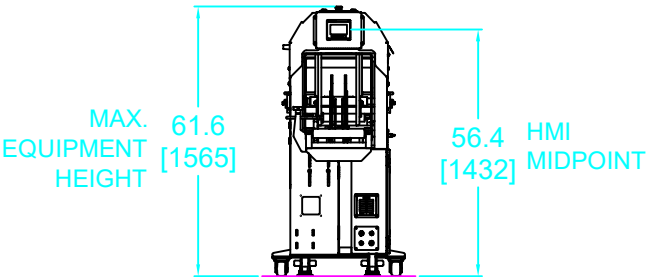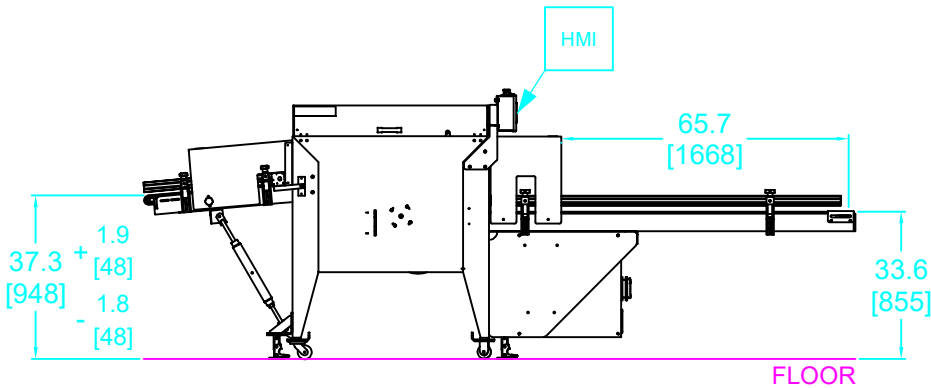

4	400-314	KIT, OPTION, GUARDING	2
3	4020-314	KIT, ELEC, COLLATOR, 120 VAC, PF525	2
2	4020-208	KIT, ELEC, COLLATOR, CONSUMABLES	2
1	2420-190	COLLATOR, CUS	2
ITEM #	PART #	DESCRIPTION	QTY

REV.	DESCRIPTION	DATE	ENGINEER
REVISIONS			

COLOR CODING			
	BPA EQUIPMENT/INFORMATION		
	DIMENSIONS/REFERENCE TEXT		
	EMERGENCY STOP PUSHBUTTONS		
	TBD/FUTURE EQUIPMENT/INFO		
	UTILITY INFORMATION		
	CUSTOMER EQUIPMENT/PLANT		

LEGEND ELECTRICAL UTILITY DROP -  PNEUMATIC UTILITY DROP -  DATA UTILITY DROP -  EMERGENCY STOP -  STACK LIGHT -  OTHER (WILL SPECIFY) - 		DIMENSIONS ARE IN INCHES [METRIC DIMENSIONS] FOR REFERENCE ONLY		
TOLERANCE ±1/4" UNLESS OTHERWISE NOTED		DESCRIPTION: 97250 HERSHEY SS COLLATOR		SHEET: B
DATE: 12/10/2024		DRAWING NUMBER: 97250 INSTALLATION		PAGE: 1 / 1
ENGINEER: ROBERT HALEY				REVISION: A
© 2017 All content remains the property of BluePrint Automation, Inc., All rights reserved		16037 Innovation Drive Colonial Heights, VA 23834 804-520-5400		

