
Safety and Handling Guide

Includes:

General Precautions and Safety Features

Warning Labels

Machine Handling

Food Handling



Precautions: Always maintain operator safety!

All electrical and air connections to this equipment must be turned off before repairing, cleaning or removal of any scrap.

Incoming power and air must be disconnected before working on your Counter Stacker.

Do not put your hands or tools into the Counter Stacker while it is operating.

Do not operate the Counter Stacker without all guards and safety mechanisms in place.

Do not wear neckties, jewelry, loose clothing, or other items that can become caught in moving parts or mechanisms in the vicinity of the Counter Stacker.

Wear all company-specified personal protective equipment (safety glasses, hearing protection, safety shoes, cotton overalls and sanitary gloves) while operating the Counter Stacker.

Do not operate, troubleshoot, or maintain the Counter Stacker while under the influence of any type of drug or alcohol.

Always observe all safety warnings and notices on the machine and in this manual.

Do not use flammable or toxic cleaning fluids such as gasoline, benzene, or ether when cleaning and maintaining the Counter Stacker.

Machine operating noise level - 85dB

This machine must have 4Ft (1.25m) clearance that is free of debris at all times.

Operating environment must be clean and dry, without dust or fog that limits visibility.

Failure to follow these safety guidelines may result in injury to personnel.

Safety Features

The Counter Stacker is equipped with two Emergency Stop buttons. One is located on the main control panel near the discharge end of the machine on the left side. The second is located above the electrical panel on the right side of the machine. Press either Emergency Stop button to immediately stop machine operation.

Operator Training

Several safety devices have been provided. Operators should be trained in safe operating procedures. They should be shown the location of all emergency stops and guard switches.

Safety glasses, hearing protection, safety shoes and sanitary gloves should be worn when operating this machine.

Only trained personnel shall open any electrical cabinet.

Safety glasses, hearing protection, cotton coveralls, safety shoes and gloves should be worn when working on or around this machine.

DANGER

**TURN ELECTRICAL AND AIR OFF BEFORE
CLEANING OR REPAIRING MACHINE**

DANGER

Warning Labels

WARNING

Moving parts can crush and cut.

Do not operate with guard removed.

Follow lockout procedure before servicing.

Hazard: Air and power actuated forks and towers.

Moving chains and belts.

Risk: Fingers and/or hands, loose clothing, jewelry, or other items can be struck or caught by moving parts causing serious injury.

Avoidance: Do not reach over, under or around guards while the machine is operating. Do not operate the machine without all guards in place.

Keep hands clear of the belts while the machine is running. Do not wear loose clothing, neckties, or jewelry in the vicinity of the machine while it is running.

Lockout the machine while servicing.



WARNING

To avoid possible injury lockout electrical power before servicing.

WARNING

To avoid possible injury lockout pneumatic power before servicing.

Hazard: Electrical and Air powered devices may fire unexpectedly. Air and Power may be reactivated by other personnel.

Risk: Fingers and/or hands, tools, or other items may be struck or caught by air and electrical powered devices causing serious injury.

Avoidance: The air gate can be locked in the closed position. The Main power disconnect can be locked in the Off position. Always lock the air and power systems in the closed / off position when servicing or maintaining the equipment.



Warning Labels

SAFETY INSTRUCTIONS

Hazard: Operator Safety

Risk: Untrained personnel may cause serious injury to themselves or others by not following safety procedures. Failure to follow these simple procedures can cause serious injury or death.

Avoidance:

- * Read and understand this manual and all safety labels before operating the machine. Properly train all personnel expected to operate the machine.
- * Have only properly trained service personnel service the equipment.
- * Never reach into the machine unless the power and air have been cut to the equipment by pressing an EMERGENCY STOP button or raising the Stacking Guard.
- * Insure that no other personnel can restart the equipment while it is being serviced.
- * Never tamper with electrical interlock switches or other shutdown switches.
- * When starting the machine: make sure all personnel are clear of the equipment and that no maintenance is currently being done on the equipment. Make sure all guards are in place.
- * Perform routine inspections and maintenance as outlined in the Maintenance section of this manual to ensure that all guards and safety features are in place and functioning.

SAFETY INSTRUCTIONS

1. Read and Understand the Operation Manual and all labels before operating this machine.
2. Only a trained person is to be permitted to operate this machine. Training should include instruction in operation under normal conditions and emergency situations.
3. This machine is to be serviced only by trained and authorized personnel. Follow lockout procedures before servicing.
4. Never reach into the machine for any reason unless the machine is at a **COMPLETE STOP**.
5. Never leave the machine stopped in such a manner that another worker can start the machine while you are working on or within the machine.
6. Never change or defeat the function of electrical interlocks or other machine " shutdown " switches.
7. Before starting this machine, check that:
 - All persons are clear of the machine.
 - No maintenance work is being performed on the machine.
 - All guards are in place.
8. Routine inspection and corrective/ preventative maintenance measures are to be conducted to ensure that all guards and safety features are retained and function properly.

SL 18

Machine Handling

Transportation

Handle With Care

When transporting, the equipment should be securely bolted to platforms or skids, which are slightly larger than the equipment to be transported.

Cover or wrap each piece of equipment to protect it from damage caused by excessive dust or dirt.

The equipment should be enclosed (crated) to prevent physical damage during transit.

If the equipment is to be shipped to a new location, use a van. Never ship this equipment on flat bed trucks.

Environmental Conditions - See page 9, Specifications.

Storage

Loosen the tension on the belts when storing the equipment for any length of time.

The machine should be stored in a clean and dry location when not in use. Cover or wrap the machine to protect the machine from damage caused by excessive dust or dirt.

Environmental Conditions - See page 9, Specifications.

Handling

Lift each piece of equipment carefully. Use a lift truck with six foot fork extensions. Lift points are clearly marked on both ends of the machine.

Counters Stacker Mass - 1761.349lbs (798.934 kg)

Center of Gravity

Caution: Use extreme care when lifting this machine.

Environmental Conditions - See page 9, Specifications.



*figure 14-1
Lift Points, Infeed End*



*figure 14-2
Lift Points, Discharge End*



*figure 14-3
Center of Gravity*

Food Handling

Installation

Warning: Open Air Exposure Of Food During Handling. Customer to ensure no possible source of toxic contaminants from air currents, ambient dust, liquids (including potential leakage sources), condensation, or aerosols.

Clean Prior to Initial Use

IMPORTANT NOTE: DO NOT USE flammable or toxic cleaning fluids such as gasoline, benzene, or ether when cleaning the equipment. It is the customers responsibility to make sure any cleaning or sanitizing agents used are rinsed completely from the food contact surfaces with no residue remaining.

Vacuum or blow any dirt or dust out of the unit.

Wipe all food contact surfaces with a damp cloth. Mist with a sanitizing spray, if desired (see Important Note above).

Belts

Do NOT Attempt to clean the belts while they are in motion.

Push the **EMERGENCY STOP** button down to stop the belts.

Wipe the accessible portion of each belt with a damp cloth.

Release the **EMERGENCY STOP** button by turning it clockwise.

Push the **SAFETY RESET** button.

Push the **CYCLE START** button to advance the belts.

Repeat until the belts are clean.

Wipe all photo sensor lenses.

Blow out all hoses and air lines.

Wipe down the entire machine.

Poly Carbonate Guarding - Cleaning

Wash with lukewarm water containing a neutral (**safe for plastics**) detergent using a soft sponge, a wool cloth or a chamois.

Rinse with water.

Never use razor blades, scrapers, squeegees, brushes, etc.

DO NOT Attempt To Wipe Down the Machine While it is Running.

Food Handling

Routine Cleaning

The equipment should be cleaned and wiped down as follows at least once every shift. Depending on the type of product being processed, more frequent cleaning may be required.

Inspect all food contact surfaces for product debris or other contaminants. The machine must be wiped down and the belts cleaned if any debris or contaminants are found.

Poly Carbonate Guarding - Cleaning

Wash with lukewarm water containing a neutral (**safe for plastics**) detergent using a soft sponge, a wool cloth or a chamois.

Rinse with water.

Never use razor blades, scrapers, squeegees, brushes, etc.

DO NOT Attempt To Wipe Down the Machine While it is Running.

Cleaning

The equipment is not designed for complete washdown.

If a cleaning agent is desired a food grade sanitizing spray may be used.

BEFORE CLEANING LOCKOUT AND TAG ELECTRICAL DISCONNECT (pull out on white inset) AND MAIN AIR GATE (through holes in gate when pushed down(off position)).

DO NOT Attempt To Wipe Down the Machine While it is Running. DO NOT Attempt to clean the equipment while the belts are in motion.

Push one of the EMERGENCY STOP buttons down.

Remove all tortilla scraps from stacking towers and conveyors.

Vacuum or blow refuse out of the units.

Wipe all food contact surfaces with a damp cloth. Mist with a food grade sanitizing spray, if desired.

Belts

Do NOT Attempt to clean the belts while they are in motion.

Push the **EMERGENCY STOP** button down to stop the belts.

Wipe the accessible portion of each belt with a damp cloth.

Release the **EMERGENCY STOP** button by turning it clockwise.

Push the **SAFETY RESET** button.

Push the **CYCLE START** button to advance the belts.

Repeat until the belts are clean.

Wipe all photo sensor lenses.



figure 16-1
Electrical Disconnect



figure 16-2
Main Air Gate

Food Handling

Maintenance

BEFORE PERFORMING ANY MAINTENANCE LOCKOUT AND TAG ELECTRICAL DISCONNECT (pull out on white inset) AND MAIN AIR GATE (through holes in gate when pushed down(off position)).

Allowable chemicals, solvents, lubricants, etc.

Motor Gearbox - Food Grade Cylinder Oil

Component Bearings & Chains

Food Grade Bearing Grease

Suggested compound: LPS ThermaPlex™ FoodLube Bearing Grease, manufactured by LPS Laboratories

Servo slider shaft:

Clean - disposable paper and methylated spirit or alcohol.

Never use any chemicals which are toxic or which may leave a residue to contaminate food.

Inspection After Maintenance

Inspect all food contact surfaces for debris or other contaminants. The machine must be wiped down and the belts cleaned if any debris or contaminants are found.

Cleaning

Refer to page 18 for cleaning procedures.



*figure 17-1
Electrical Disconnect*



*figure 17-2
Main Air Gate*


Additional Safety Considerations

Offload Table

If adjustments are made to the offload table position insure that the gap between the discharge belts and the offload table is no more than 4mm.

Product End of Life

When this equipment has reached its End Of Life as determined by the end user, it is recommended that all stainless components and all copper wire be recycled. Follow individual manufacturer recommendations for electrical components.

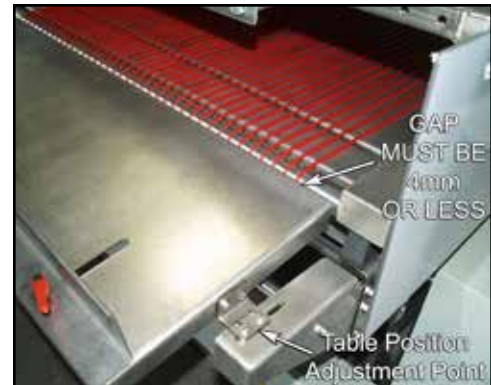

*Figure 18-3
Offload Table Position*