ETA1036

3W, 0.85V Startup Voltage, Synchronous Step-Up Converter with Real-Shutdown and Short-Circuit Protection in SOT23-5

DESCRIPTION

The ETA1036 is a high efficiency synchronous step-up converter that can provide up to 3W of power to a boosted output from a low voltage source. Unlike most step-up converter, not only it starts up at a very low input voltage as low as 0.85V, it also incorporates circuits that disconnect the input from output, during shutdown, short-circuit, output current overloading, or other events when output is higher than the input. This eliminates the need for an external MOSFET and its control circuitry to disconnect the input from output, and provides robust output overload protection. The ETA1036 starts up from a voltage as low as 0.85V making it ideal for applications with single-cell or two-cell alkaline, NiCd, and NiMh batteries. A switching frequency of 2MHz minimizes solution footprint by allowing the use of tiny and low profile inductors and ceramic capacitors. An internal synchronous MOSFET provides highest efficiency and with a current mode control that is internally compensated, external parts count is reduced to minimal. ETA1036 is available in three output voltage options. They are 2.1V, 3.3V and 5V. It is housed in a tiny SOT23-5 package.

FEATURES

- **Output Disconnect**
- **Short-circuit Protection**
- **3W Output Power**
- **Output to Input Reversed Current Protection**
- **0.85V Low Start-up Voltage**
- **VIN range from 0.6V to 4.5V**
- **Up to 96% Efficiency**
- **40µA No load I_Q and light load PFM Mode**
- **Internal Synchronous Rectifier**
- Current Mode control
- Logic Control Shutdown and Thermal shutdown
- SOT23-5 Package

APPLICATIONS

- USB OTG for MIDs, Smartphones
- Mobile back-up Battery Chargers
- Alkaline, NiCd, and NiMh batteries applications
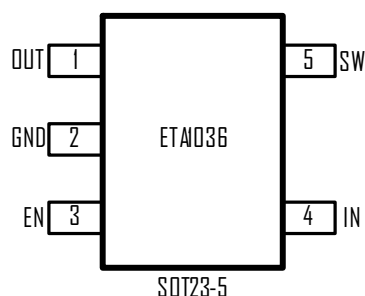- USB powered devices

ORDERING INFORMATION

PART #	Output Voltage	TOP MARK
ETA1036-50S2F-T	5.0V	CPYW
ETA1036-33S2F-T	3.3V	DzYW
ETA1036-21S2F-T	2.1V	DaYW

TYPICAL APPLICATION

Efficiency Vs I_{OUT}

ETA1036
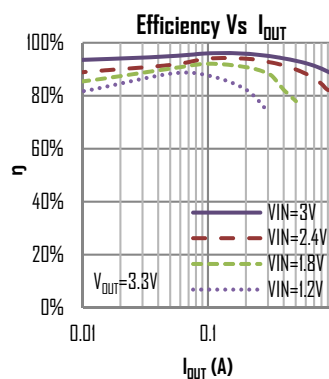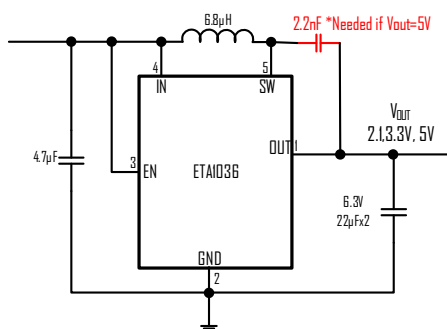
PIN CONFIGURATION

SOT23-5

ABSOLUTE MAXIMUM RATINGS

(Note: Exceeding these limits may damage the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.)

SW Voltage..-0.3V to 5.5V
All Other PIN Voltages................................–0.3V to 5V
SW to ground current ....Internally limited
Operating Temperature Range ....–40ºC to 85ºC
Storage Temperature Range ....–55ºC to 150ºC
Thermal Resistance θ_{JA} θ_{JC}
SOT23-5...220...........110 ....ºC/W

ELECTRICAL CHARCACTERISTICS

(V_{IN} = 1.8V, V_{OUT} = 3.3V, unless otherwise specified. Typical values are at TA = 25ºC.)

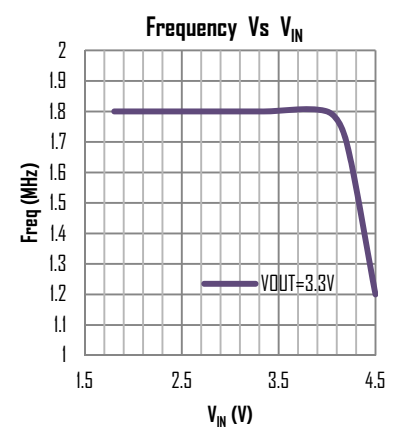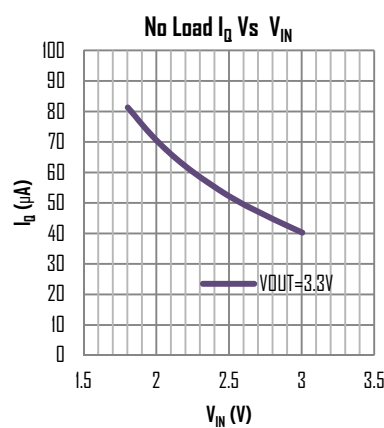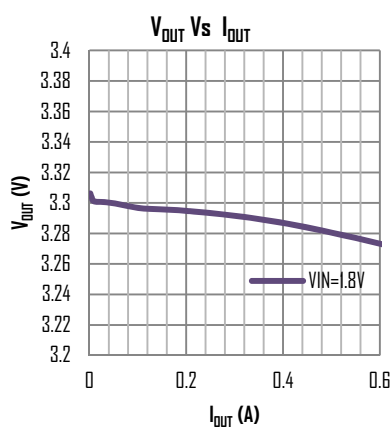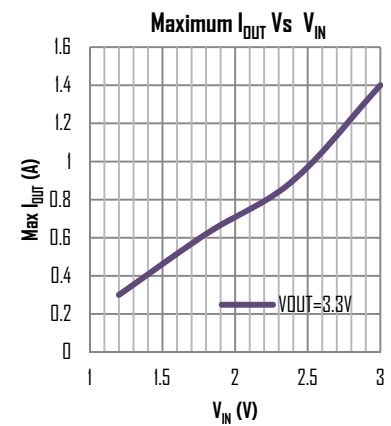| PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Minimum Input Voltage			0.6		V
Startup Voltage	I_{OUT}=0A		0.85	1.1	V
Output Voltage	V_{IN} =1.8		2.1		V
			3.3		
			5.0		
Quiescent Current at IN	No Switching		40		μA
Shutdown Supply Current at IN	V_{EN}=GND		0.5	5	μA
Switching Frequency	V_{IN}<4.3V	1.2	2	2.4	MHz
Maximum Duty Cycle		90			%
NMOS Switch On Resistance	I_{SW} =100mA		0.15	0.35	Ω
PMOS Switch On Resistance	I_{SW} =100mA		0.15	0.35	Ω
NMOS Switch Current Limit		1.2	1.5		A
Start-up Current Limit			0.5		A
Output to Input Reverse Leakage Current	V_{EN}=GND, Measure at IN pin		0.1	5	μA
SW Leakage Current	V_{OUT}=5V,V_{SW}=0 or 5V, V_{EN}=GND			10	μA
EN Input Current			0.1	1	μA
EN Input Low Voltage				0.3	V
EN Input High Voltage		0.6			V
Thermal Shutdown	Rising, Hysteresis=10ºC		165		ºC

PIN DESCRIPTION

| PIN #	NAME	DESCRIPTION
1	OUT	Output pin. Bypass with a 22μF or larger ceramic capacitor closely between this pin and GND
2	GND	Ground Pin
3	EN	Enable pin for the IC. Drive this pin high to enable the part, low to disable.
4	IN	Input Supply Voltage. Bypass with a 4.7μF ceramic capacitor to GND
5	SW	Inductor Connection. Connect an inductor Between SW and the regulator output

TYPICAL CHARACTERISTICS

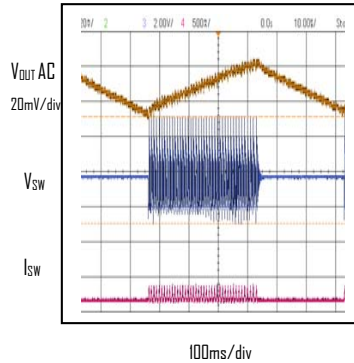(Typical values are at TA = 25⁰C unless otherwise specified.)

Efficiency Vs I_{OUT}

V_{OUT}=2.1V

— VIN=1.9V
-- VIN=1.5V
⋯ VIN=0.9V

Efficiency Vs I_{OUT}

V_{OUT}=3.3V

— VIN=3V
-- VIN=2.4V
-- VIN=1.8V
⋯ VIN=1.2V

Efficiency Vs I_{OUT}

V_{OUT}=5V

-- VIN=2.5V
-- VIN=3.6V
-- VIN=4.2V

Efficiency Vs V_{IN}

V_{OUT}=3.3V

-- IOUT=400mA
— IOUT=100mA
-- IOUT=10mA

V_{OUT} Vs V_{IN}

— IOUT=100mA

Maximum I_{OUT} Vs V_{IN}

— VOUT=3.3V

V_{OUT} Vs I_{OUT}

— VIN=1.8V

No Load I_Q Vs V_{IN}

— VOUT=3.3V

Frequency Vs V_{IN}

— VOUT=3.3V

Outperform with Efficiency

TYPICAL CHARACTERISTICS

(Typical values are at TA = 25°C unless otherwise specified.)

Heavy load Switching Waveform
V_{IN}=1.8V, V_{OUT}=3.3V, I_{OUT}= 500mA

V_{OUT} AC
20mV/div
V_{SW}
I_{SW}

500ns/div
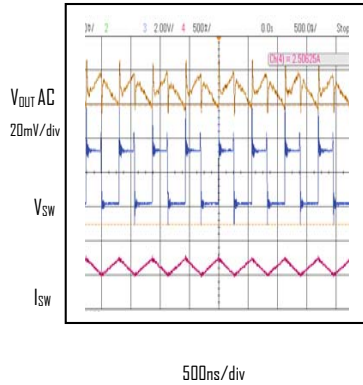
Light load Switching Waveform
V_{IN}=1.8V, V_{OUT}=3.3V, I_{OUT}= 10mA

V_{OUT} AC
20mV/div
V_{SW}
I_{SW}

100ms/div

Short-Circuit Response
V_{IN}=3V, V_{OUT}=3.3V

V_{OUT}
I_{SW}

200µs/div
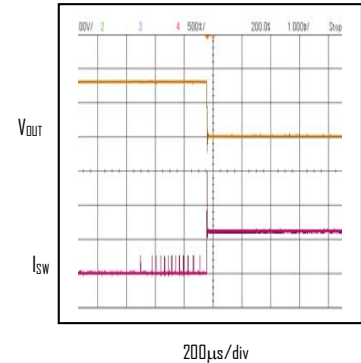
Short-Circuit Recovery
V_{IN}=3V, V_{OUT}=3.3V

V_{OUT}
I_{SW}

500ns/div
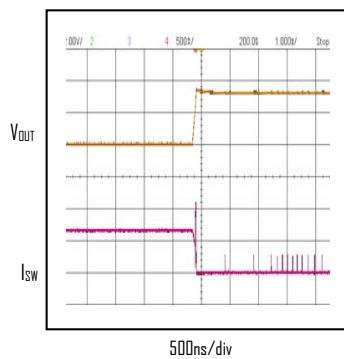
Start-Up Waveform
V_{IN}=3.0V, V_{OUT}=3.3V, I_{OUT}= 500mA

V_{EN}
V_{OUT}
V_{SW}
I_{SW}

5ms/div
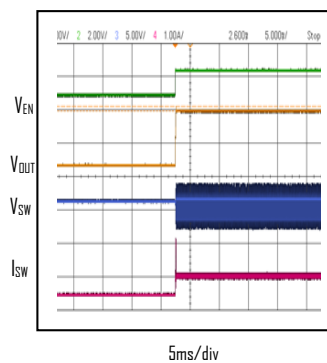
Shut Down Waveform
V_{IN}=3.0V, V_{OUT}=3.3V, I_{OUT}= 500mA
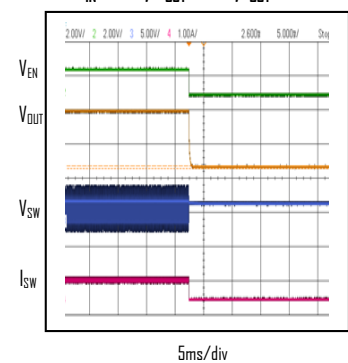
V_{EN}
V_{OUT}
V_{SW}
I_{SW}

5ms/div

Load Transient Response
V_{IN}=3V, V_{OUT}=3.3V I_{OUT}=0.1A to 0.5A

V_{OUT}
I_{SW}

1ms/div
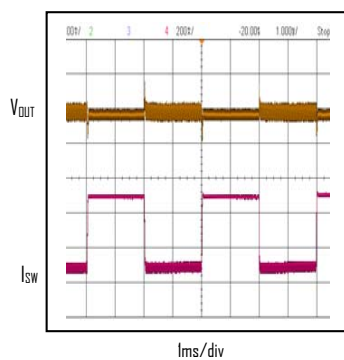
Load Transient Response
V_{IN}=3V, V_{OUT}=3.3V I_{OUT}=0.1A to 1A

V_{OUT}
I_{SW}

1ms/div
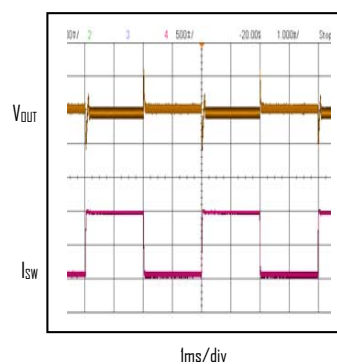
Line Transient Response
V_{OUT}=3.3V, I_{OUT}= 100mA V_{IN}=1.2V to3V

V_{OUT}
V_{IN}

2ms/div

Outperform with Efficiency
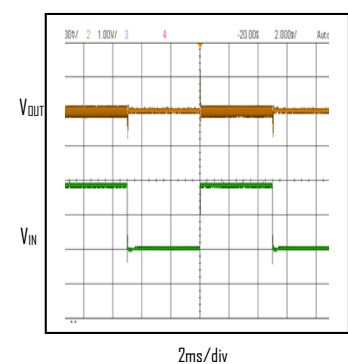
FUNCTIONAL DECRIPTIONS

Loop Operation

The ETA1036 is a wide input range, high-efficiency, DC-to-DC step-up switching regulator, capable of delivering up to 3W of output power, integrated with a 150mΩ high side MOSFET and 150 mΩ synchronous rectifier. It uses a PWM current-mode control scheme. An error amplifier integrates error between the FB signal and the internal reference voltage. The output of the integrator is then compared to the sum of a current-sense signal and the slope compensation ramp. This operation generates a PWM signal that modulates the duty cycle of the power MOSFETs to achieve regulation for output voltage.

Light Load Operation

Traditionally, a fixed constant frequency PWM DC-DC regulator always switches even when the output load is small. When energy is shuffling back and forth through the power MOSFETs, power is lost due to the finite RDSONs of the MOSFETs and parasitic capacitances. At light load, this loss is prominent and efficiency is therefore very low. ETA1036 employs a proprietary control scheme that improves efficiency in this situation by enabling the device into a power save mode during light load, thereby extending the range of high efficiency operation.

Short-Circuit Protection

Unlike most step-up converters, the ETA1036 allows for short circuits on the output. In the event of a short circuit, the device first turns off the NMOS when the sensed current reaches the current limit. After V_{OUT} drops below V_{IN} the device then enters a linear charge period with the current limited same as with the start-up period. In addition, the thermal shutdown circuits disable switching if the die temperature rises above 165°C.
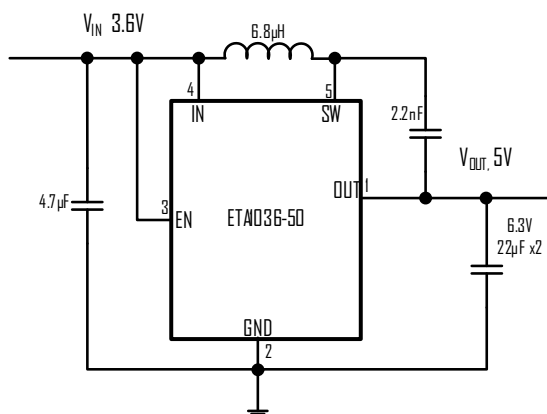
Down Mode (V_{IN}>V_{OUT}) Operation

The ETA1036 will continue to supply the output voltage even when the input voltage exceeds the output voltage. Since the PMOS no longer acts as a low-impedance switch in this mode, power dissipation increases within the IC to cause a sharp drop in efficiency. Limit the maximum output current to maintain an acceptable junction temperature.

BLOCK DIAGRAM
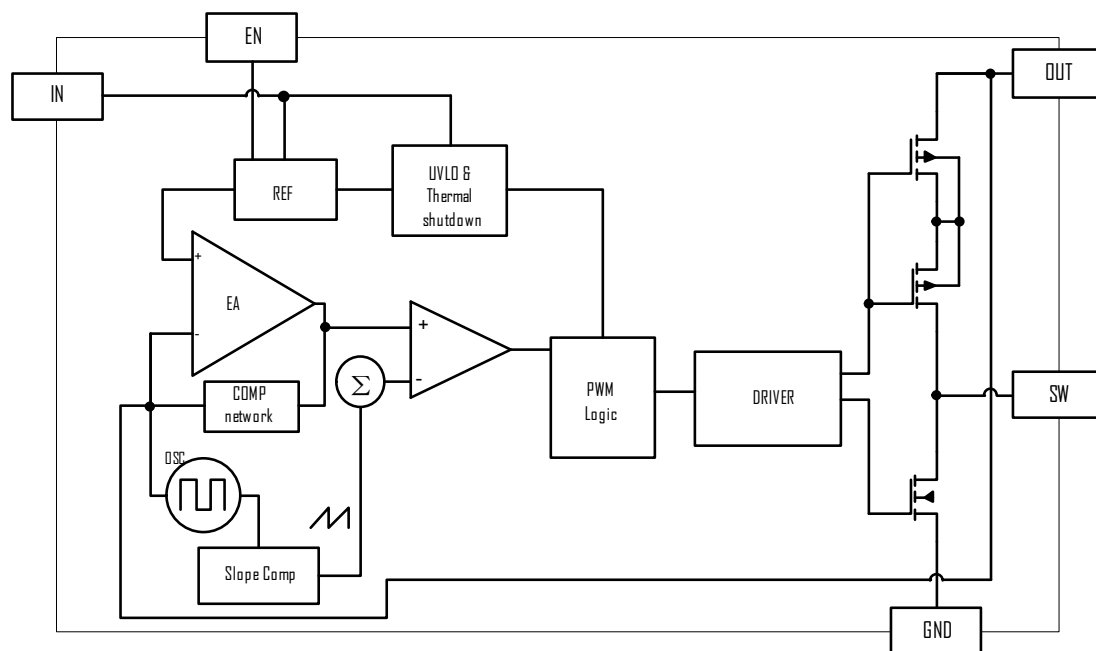
5V APPLICATIONS

For ETA1036-50, the 5V output voltage option, in order to maintain an acceptable peak voltage at SW, a small parallel capacitor snubber between SW and OUT is necessary, and an output cap of greater than 44µF is also required as shown in below figure.

PACKAGE OUTLINE