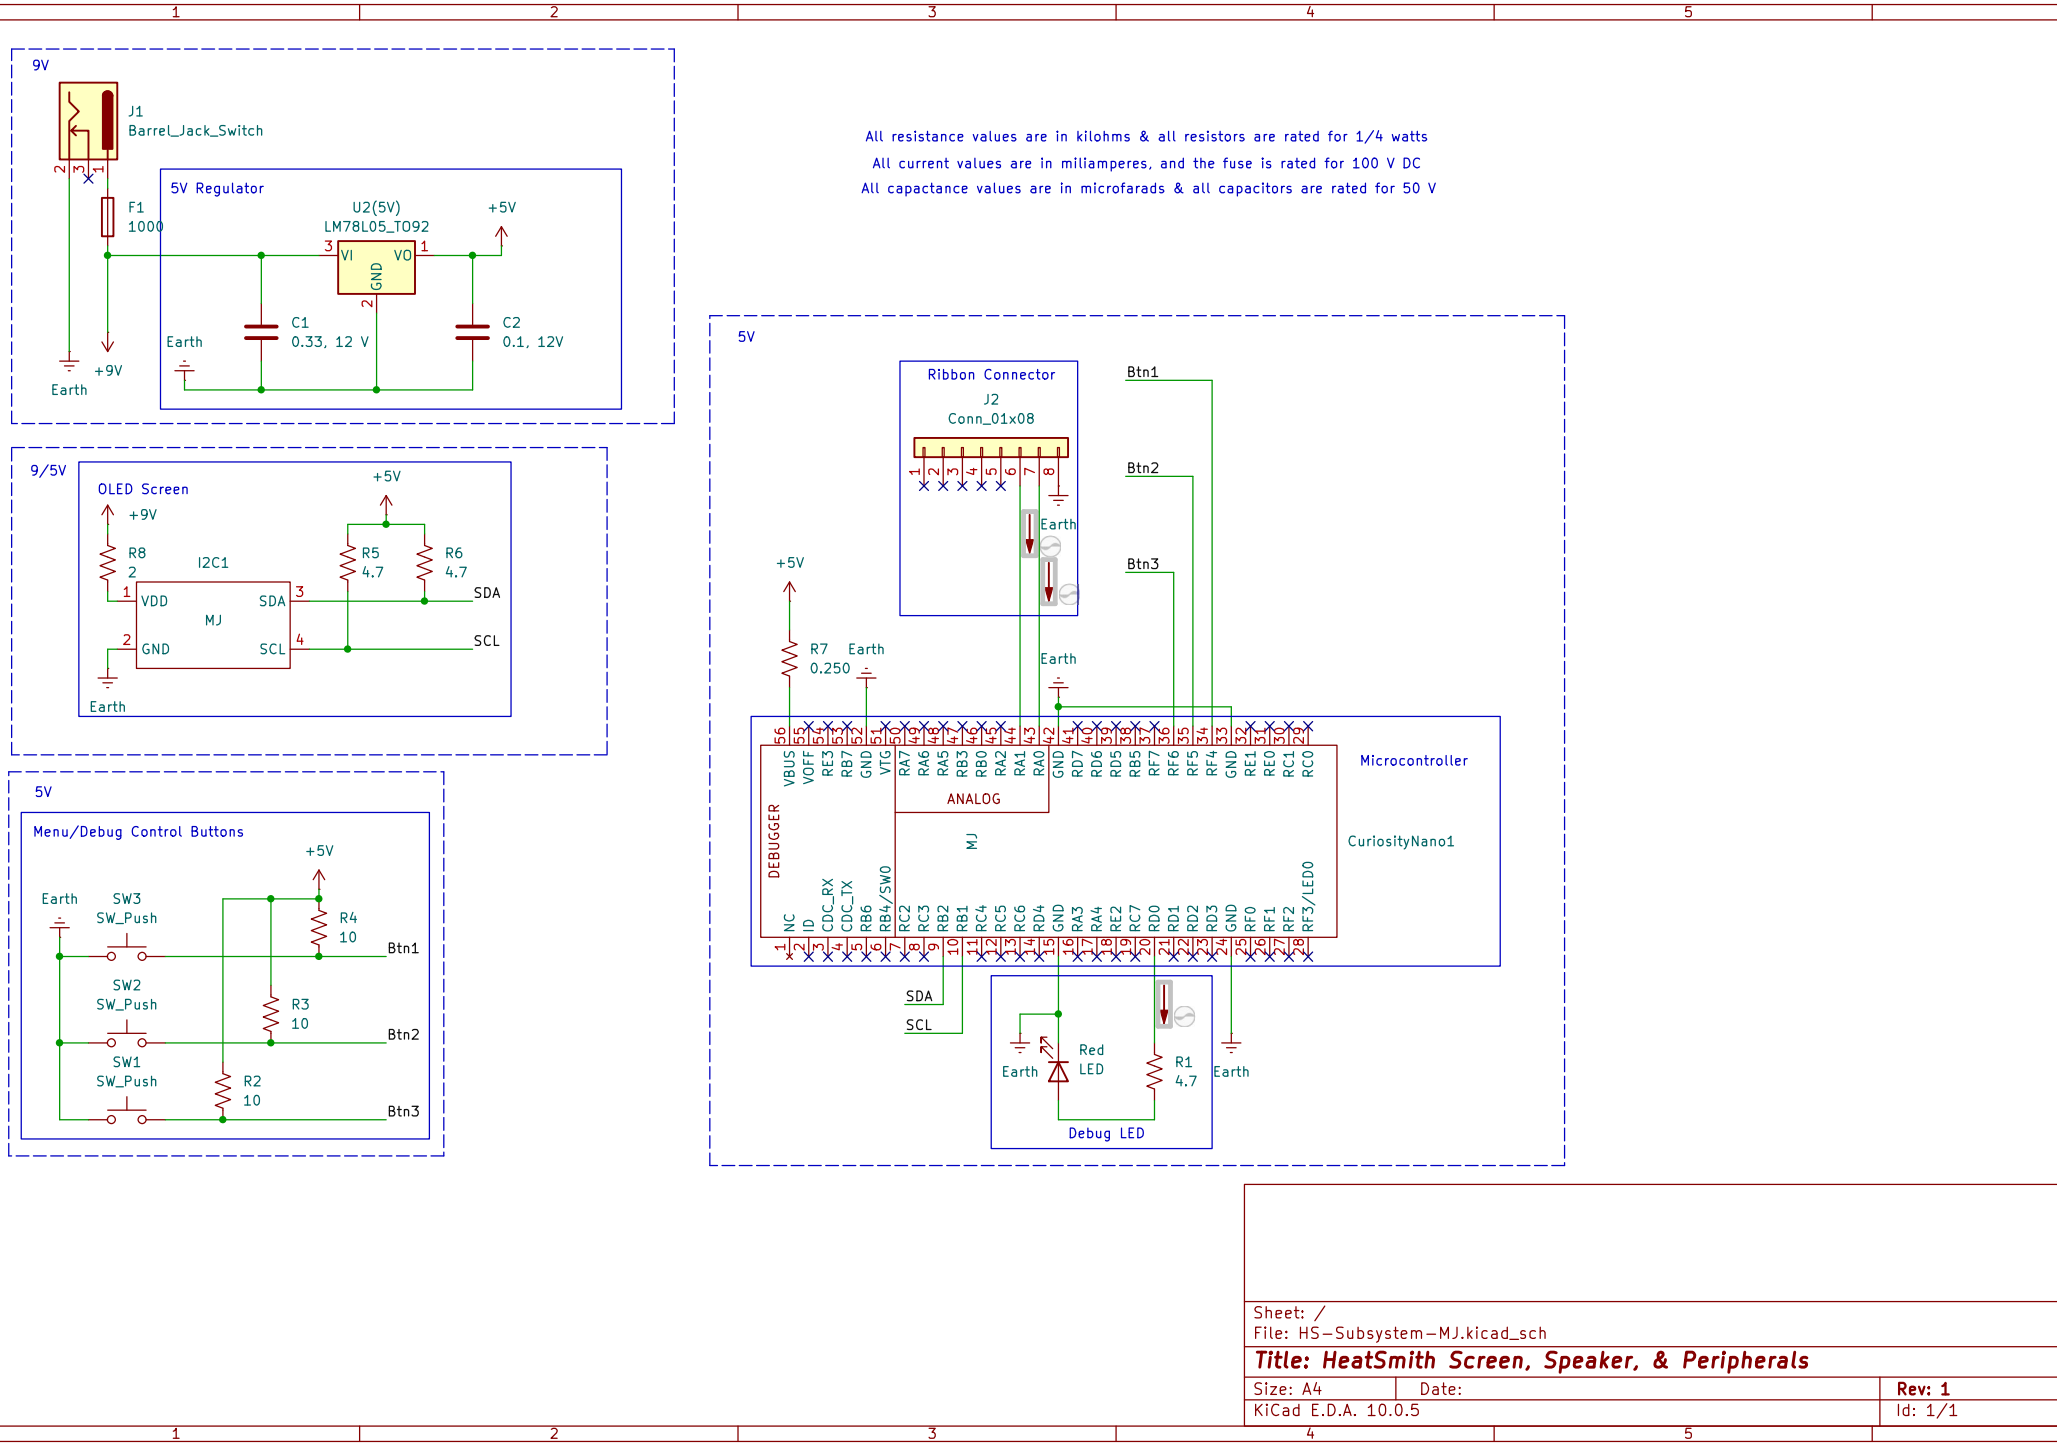
9V
J1
Barrel_Jack_Switch
F1
1000
5V Regulator
U2(5V)
LM78L05_TO92
VI
VO
GND
+5V
C1
0.33, 12 V
C2
0.1, 12V
Earth
+9V
All resistance values are in kilohms & all resistors are rated for 1/4 watts
All current values are in miliamperes, and the fuse is rated for 100 V DC
All capactance values are in microfarads & all capacitors are rated for 50 V
9/5V
OLED Screen
I2C1
R8
2
R5
4.7
R6
4.7
VDD
SDA
GND
SCL
MJ
5V
Menu/Debug Control Buttons
SW3
SW_Push
SW2
SW_Push
SW1
SW_Push
R4
10
R3
10
R2
10
Btn1
Btn2
Btn3
5V
Ribbon Connector
J2
Conn_01x08
R7
0.250
Microcontroller
CuriosityNano1
DEBUGGER
ANALOG
MJ
Red
LED
R1
4.7
Debug LED
Sheet: /
File: HS-Subsystem-MJ.kicad_sch
Title: HeatSmith Screen, Speaker, & Peripherals
Size: A4
Date:
Rev: 1
KiCad E.D.A. 10.0.5
Id: 1/1