

DO NOT
SCALE FROM
THIS PRINT



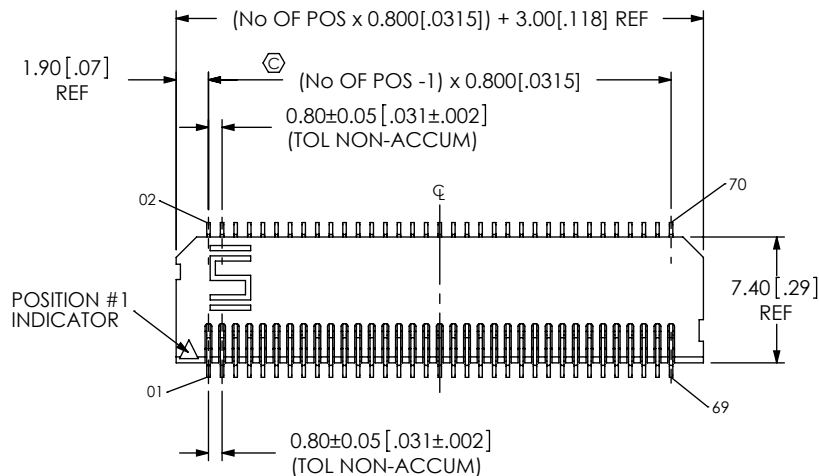


FIG 1
FOR POSITIONS -10, -20, -30 & -35
(SHOWN: MEC8-135-01-XX-D-RA1)

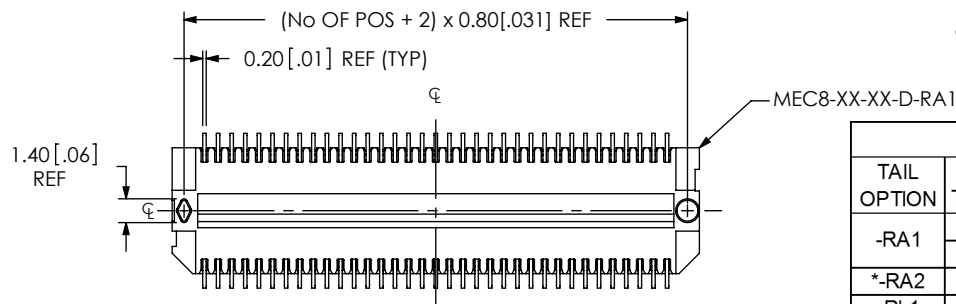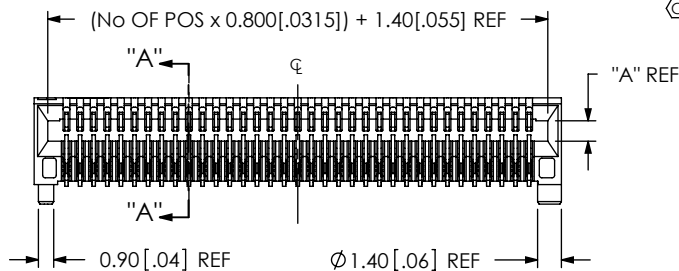

MEC8-1XX-XX-XX-D-RXX-XX

No OF POSITIONS (PER ROW)

-10, -20, -30, -35 (SEE FIG 1)
-40 & -50 (SEE FIG 2, SHEET 2)
-13, -25, -37, -49 (-02 CARD THICKNESS ONLY, SEE FIG 2)

CARD THICKNESS

-01: 1mm [.039] THICK CARD (USE MEC8-XX-01-D-RAX)
**-02: 1.57mm [.062] THICK CARD (USE MEC8-XX-02-D-RAX)

PLATING

-L: 10µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
-S: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
-LM: 10µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
-SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

OPTION

-TR: TAPE & REEL (SEE FIG 5, SHT 3)

TAIL OPTION

-RA1: STANDARD (SEE FIG 1) (USE MEC8-XX-XX-D-RA1, C-173-01-X & C-174-XX-X)
*-RA2: ELEVATED (SEE FIG 3, SHT 3) (USE MEC8-XX-XX-D-RA2, C-173-02-X & C-174-02-X)
-RL1: LATCHING (SEE FIG 4, SHT 4) (USE MEC8-XX-XX-D-RL1, C-173-01-X, C-174-03-X & WT-25-03-T, AVAILABLE IN POS -13, -25, -37 & -49)

ROW SPECIFICATION

-D: DOUBLE (USE MEC8-XX-XX-D-RXX)

* = NOT TOOLED
** = SEE NOTE 4

TABLE 1

No OF POS	COPLANARITY
-10 THRU -39	0.102[.0040]
-40 THRU -50	0.152[.0060]

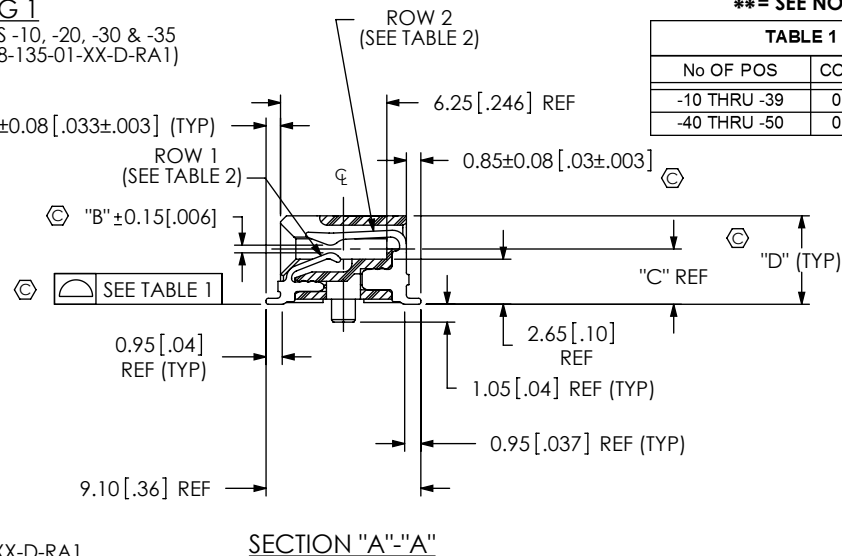



TABLE 2

TAIL OPTION	CARD THICKNESS	ROW 1 CONTACT	ROW 2 CONTACT	"A"	"B"	"C"	"D"
-RA1	-01	C-173-01-XX	C-174-01-XX	1.20[.047]	0.45[.018]	3.25[.128]	5.20[.205]
	-02	C-173-01-XX	C-174-03-XX	1.80[.071]	0.95[.037]	3.54[.139]	5.78[.227]
*-RA2	-01	C-173-02-XX	C-174-02-XX	1.20[.047]	0.45[.018]	5.25[.207]	7.20[.283]
-RL1	-02	C-173-01-XX	C-174-03-XX	1.80[.071]	0.95[.037]	3.54[.139]	5.78[.227]

DESIGNED & DIMENSIONED
IN MILLIMETERS
(INCHES FOR REFERENCE ONLY)

NOTES:

1. Ⓢ REPRESENTS A CRITICAL DIMENSION.
2. BURR ALLOWANCE: 0.038[.0015] MAX.
3. MINIMUM PUSHOUT FORCE: .5 LB.
4. -02 CARD THICKNESS ONLY AVAILABLE ON -RA1 & -RL1 TAIL OPTION.
5. PARTS TO BE PACKAGED IN TRAYS UNLESS OTHERWISE SPECIFIED.

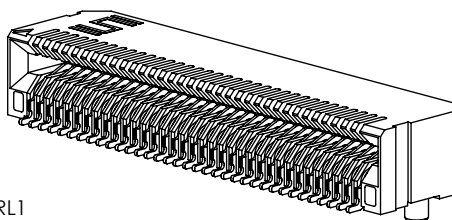

F:\DWG\MISC\MKTG\MEC8-1XX-XX-XX-D-RXX-XX-MKT.SLDDRW

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:

DECIMALS ANGLES
.X: ±.3 [.01]
.XX: ±.13 [.005]
.XXX: ±.051 [.0020]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING

FLAMMABILITY RATING: UL 94V-0

INSULATOR: LCP

-01: COLOR: NATURAL

-02: COLOR: BLACK

CONTACT: PHOS BRONZE

WELB TABS: PHOS BRONZE

SHEET SCALE: 2.25:1

DESCRIPTION:

0.8mm [.031"] RIGHT ANGLE EDGE CARD ASSEMBLY

DWG. NO.

MEC8-1XX-XX-XX-D-RXX-XX

BY: KEVIN B

10/18/01

SHEET 1 OF 4

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.COM code 55322


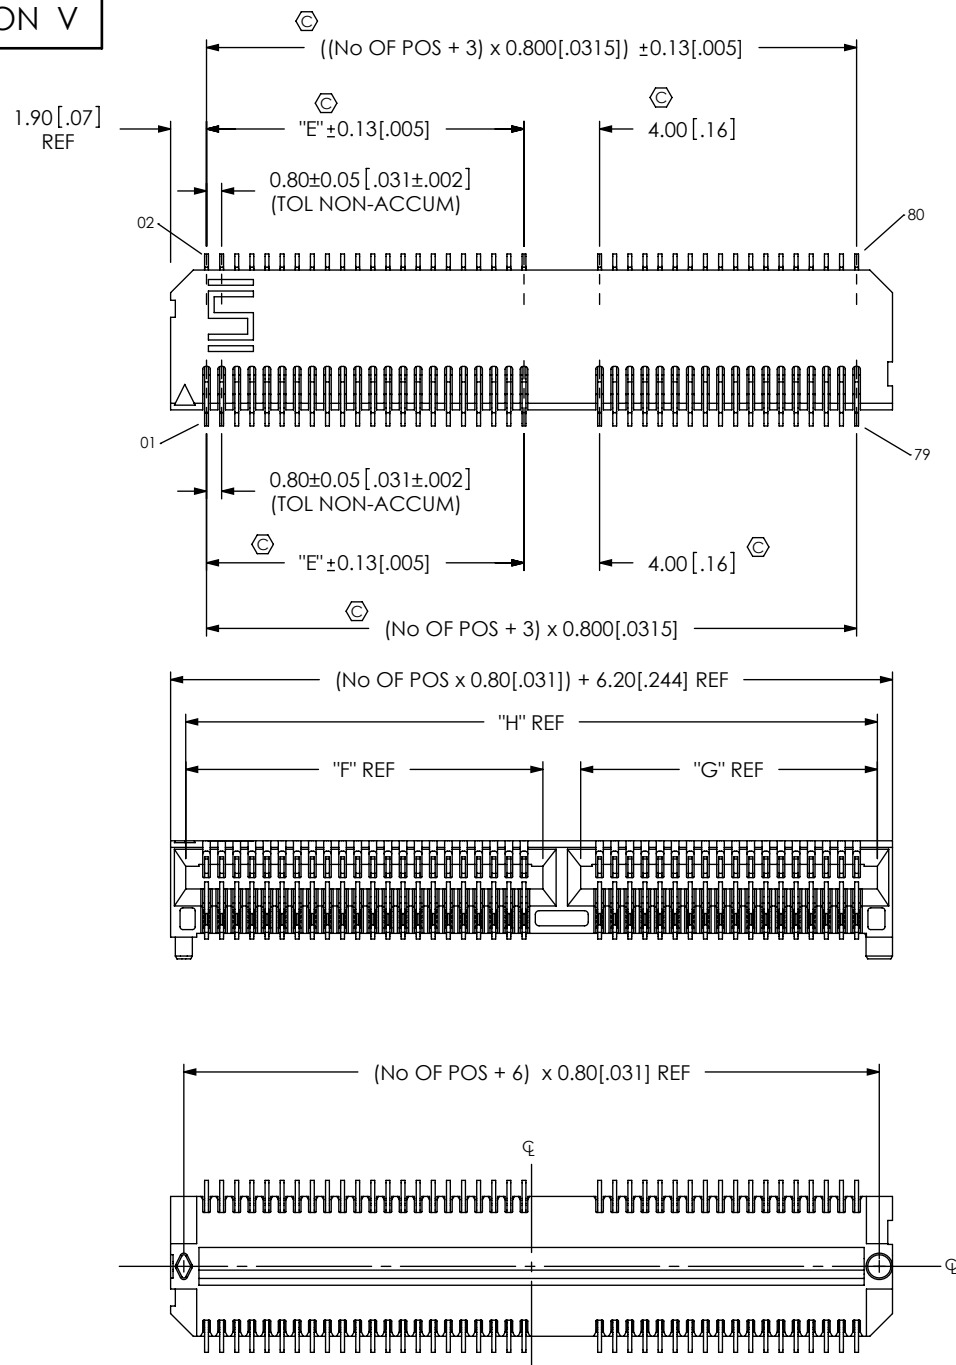


FIG 2

FOR POSITIONS -13, -25, -37, -40, -49 & -50
(FOR -13, -25, -37 & -49: -02 CARD THICKNESS ONLY)
(SAME AS FIG 1, UNLESS OTHERWISE STATED)
(SHOWN: MEC8-140-01-XX-D-RA1)

TABLE 3				
No OF POSITIONS	"E"	"F" REF	"G" REF	"H" REF
-13	4.000[.1575]	6.10[.240]	6.90[.272]	15.00[.591]
-25	4.000[.1575]	6.10[.240]	16.50[.650]	24.60[.969]
-37	16.000[.6299]	18.10[.713]	14.10[.555]	34.20[1.346]
-40	16.800[.6614]	18.90[.744]	15.70[.618]	36.60[1.441]
-49	20.800[.8189]	22.90[.902]	18.90[.744]	43.80[1.724]
-50	20.800[.8189]	22.90[.902]	19.70[.776]	44.60[1.756]



PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2.5:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:
0.8mm [.031"] RIGHT ANGLE EDGE CARD ASSEMBLY

DWG. NO.
MEC8-1XX-XX-XX-D-RXX-XX

BY: KEVIN B 10/18/01 SHEET 2 OF 4

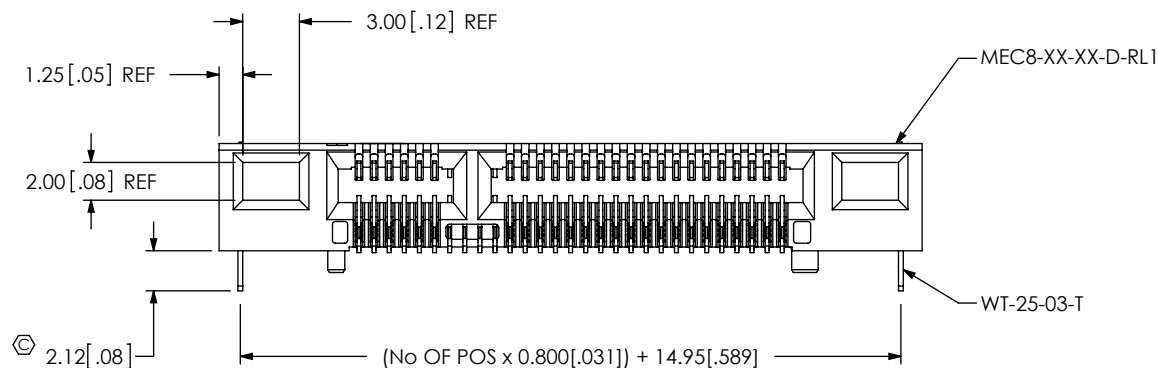
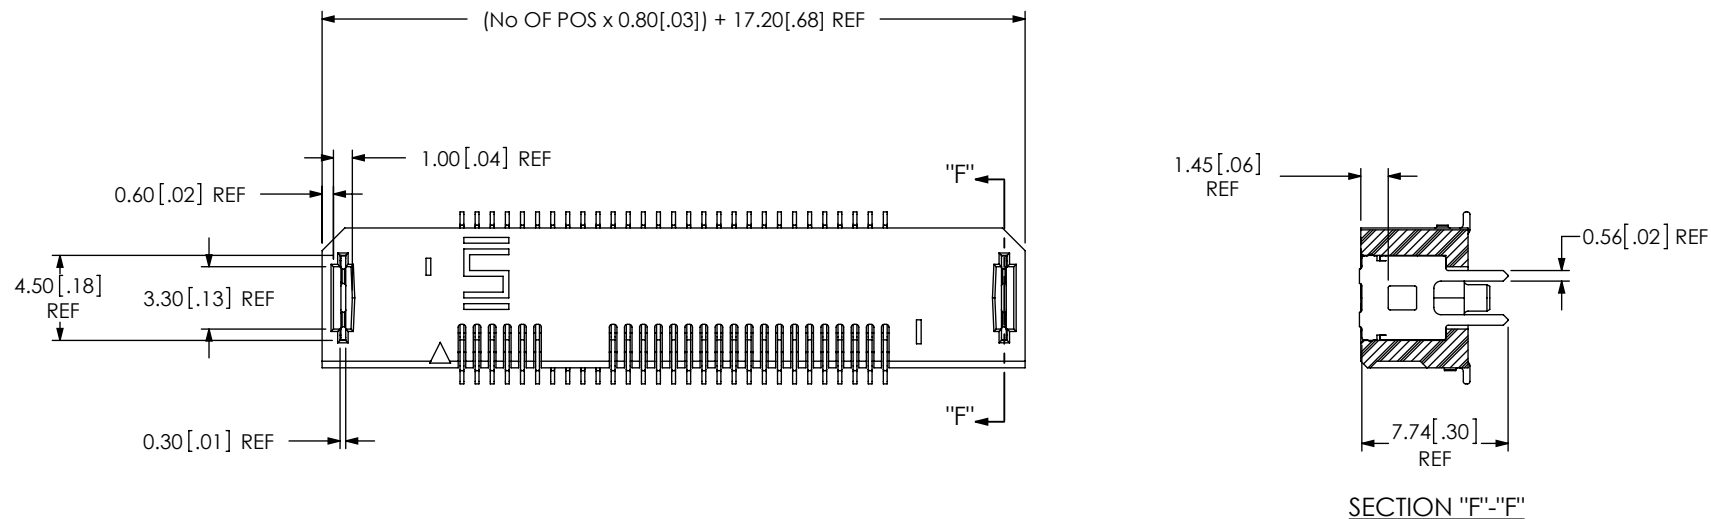


FIG 4
 -RL1: LATCHING OPTION
 (SAME AS FIG 2, UNLESS OTHERWISE STATED)
 (SHOWN: MEC8-125-01-XX-D-RL1
 (AVAILABLE ONLY IN POS
 -13, -25, -37 & -49)

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
 CONFIDENTIAL AND PROPRIETARY TO
 SAMTEC, INC. AND SHALL NOT BE REPRODUCED
 OR TRANSFERRED TO OTHER DOCUMENTS OR
 DISCLOSED TO OTHERS OR USED FOR ANY
 PURPOSE OTHER THAN THAT WHICH IT WAS
 OBTAINED WITHOUT THE EXPRESSED WRITTEN
 CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2.5:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
 PHONE: 812-944-6733 FAX: 812-948-5047
 e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:
 0.8mm [.031"] RIGHT ANGLE EDGE CARD ASSEMBLY

DWG. NO.
MEC8-1XX-XX-XX-D-RXX-XX

BY: KEVIN B 10/18/01 SHEET 4 OF 4