

RESEARCH ARTICLE

Bat overpasses: An insufficient solution to restore habitat connectivity across roads

Fabien Claireau^{1,2,3}  | Yves Bas^{1,4}  | Sébastien J. Puechmaille^{2,5}  |
Jean-François Julien¹ | Benjamin Allegrini³ | Christian Kerbiriou^{1,6} 

¹Centre d'Ecologie et des Sciences de la Conservation (CESCO), Muséum national d'Histoire naturelle, Centre National de la Recherche Scientifique, Sorbonne Université, Paris, France; ²Zoological Institute and Museum, University of Greifswald, Greifswald, Germany; ³Naturalia Environnement, Site Agroparc, Avignon, France; ⁴Centre d'Ecologie Fonctionnelle et Evolutive (CEFE), UMR 5175, CNRS – Université de Montpellier– Université Paul-Valéry Montpellier – EPHE, Montpellier, France; ⁵ISEM, Univ Montpellier, CNRS, EPHE, IRD, Montpellier, France and ⁶Centre d'Ecologie et des Sciences de la Conservation (CESCO), Muséum national d'Histoire naturelle, Station de Biologie Marine, Concarneau, France

Correspondence

Fabien Claireau

Email: fabien.claireau@gmail.com

Funding information

Naturalia Environnement & Association
Nationale de la Recherche et de la
Technologie, Grant/Award Number:
2015/0893

Handling Editor: Matthew Struebig

Abstract

1. Roads have many negative effects on wildlife, including their role in habitat fragmentation. Habitat fragmentation affects bats during their daily movements between roosts and foraging areas. As bats are protected in Europe, developers must implement specific mitigation measures that are hierarchically structured to achieve a null net impact. However, very few specific mitigation measures have been undertaken specifically for bats. Bat overpasses (e.g. gantries) are among proposed improvements intended to reduce the impact of roads, but they have rarely been tested. The effectiveness of overpasses in facilitating safe road crossing of bats is critical for justifying the implementation of this mitigation measure. We therefore assessed whether bat overpasses are effectively used by bats.
2. We studied three bat overpasses with different designs in France. We developed an innovative method to characterize bat crossings using acoustic flight path reconstruction (AFPR). We used six pairs of stereo acoustic recorders in different habitat types that were located on both sides of the road, and operated simultaneously throughout the night.
3. Recording data contained 57,941 bat passes and 284 bat crossings from six species of bats at the three study sites. Our results suggest that crossings are more numerous if an overpass is located where bat commuting routes have been identified by environmental impact assessment. However, we found that the proportion of bat crossings along the commuting route was the same with or without an overpass; thus highlighting that bat overpasses do not fully restore habitat connectivity.
4. *Synthesis and applications.* Our study demonstrates that acoustic flight path reconstruction (AFPR) is a useful approach to obtain information on bat flight behaviour. We also emphasize the importance of field testing the effectiveness of mitigation measures, such as those intended to offset the impact of roads on

biodiversity, and highlight that such measures should not be implemented based on their theoretical effectiveness alone.

KEYWORDS

Acoustic flight path reconstruction, bats, Chiroptera, collision, crossing structures, habitat connectivity, habitat fragmentation, mitigation measures

1 | INTRODUCTION

Transport has been identified as one of the ten main pressures on biodiversity (Maxwell, Fuller, Brooks, & Watson, 2016) because it contributes to habitat destruction, degradation and fragmentation, barrier effects, light and noise disturbances, chemical pollutions and direct mortality by collision with vehicles (Forman & Alexander, 1998; Trombulak & Frissell, 2000). These dramatic changes in landscape configuration have many consequences, ranging from individual behaviours and population dynamics to the overall functioning of ecosystems (Krauss et al., 2010; Saunders, Hobbs, & Margules, 1991).

At the national scale, the quantification of road network density suggests that populations of some animals, such as large snakes, may decline by 50% or more due to road-associated mortality (Rudolph, Burgdorf, Conner, & Schaefer, 1999). For insectivorous bats, road mortality can increase the risk of local extinction because these animals have low fecundity, late maturation and a population that depends on adult survival (Medinas, Marques, & Mira, 2013). In addition to road mortality, high night-time traffic can actually lead to the reduced use of breeding habitats near the motorway by acting as a barrier to forest habitats, and this road-effect zone operates well beyond 1,000 m from the road (Eigenbrod, Hecnar, & Fahrig, 2009). Thus, roads and traffic can reduce the persistence of wildlife populations, particularly when they restrict the access of individuals to breeding sites or foraging habitats (Forman et al., 2003).

Since 2000, the worldwide roadway network length has increased by approximately 12 million lane-km, and globally roads are predicted to grow by nearly 25 million paved lane-km by 2050 (Dulac, 2013). Hence, there is an urgent need to facilitate the safe movement of animals across landscapes fragmented by roads or other forms of linear infrastructure. One method used to reduce road-associated mortality is the creation of fauna crossing structures (Smith, van der Ree, & Rosell, 2015).

Most studies on road effects have focused on terrestrial mammals and amphibians, and until recently, few studies have focused on the effects of roads on flying animals, such as birds and bats. However, recent studies have highlighted that roads have a negative impact on the activity and movement of insectivorous bats (Abbott et al., 2015; Bennett & Zurcher, 2013; Berthinussen & Altringham, 2012b; Fensome & Mathews, 2016; Kitzes & Merenlender, 2014; Zurcher, Sparks, & Bennett, 2010). Indeed, connectivity in the landscape that allows daily movements between roosting and foraging areas is a key element for bats (Frey-Ehrenbold, Bontadina, Arlettaz,

& Obrist, 2013; Pinaud, Claireau, Leuchtman, & Kerbiriou, 2018). For example Hale, Fairbrass, Matthews, and Sadler (2012) demonstrated that bat activity in a habitat patch (e.g. ponds) increased with the degree of connectivity of the surrounding landscape.

In the European Union, all bat species are strictly protected by the Habitats Directive (Council of the European Union 1992), the most influential nature conservation framework in Europe (Fontaine et al., 2007). Developers must demonstrate that they will establish mitigation measures to prevent, reduce and compensate for impacts that result in any loss of bat foraging or roosting habitats (Bezombes, Gaucherand, Kerbiriou, Reinert, & Spiegelberger, 2017). The mitigation measures that have been proposed to reduce road impacts are overpasses (e.g. bat overpasses), underpasses (e.g. viaducts), vehicle speed reduction, deterrence and diversion (e.g. planting hedges), artificial roosting sites (e.g. bat boxes) and habitat improvement (Møller et al., 2016). Recent studies have suggested that wildlife crossings and underpasses could be the best solutions to restore ecological continuity, whereas bat overpasses seem to be less effective (Abbott, Butler, & Harrison, 2012; Berthinussen & Altringham, 2012a; Møller et al., 2016).

Bat overpasses are presumed to function as linear features (e.g. a hedgerow) that will attract and guide bats across the roads above traffic and have been recommended by environmental impact assessments (EIA). However, Møller et al. (2016) highlighted that carefully designed research on bat overpasses and controlled testing, including studies of the behaviour of individual species, were needed to scientifically evaluate the effectiveness of these overpass designs for bats.

Studies on the effectiveness of mitigation infrastructure for bats are particularly scarce; only one peer-reviewed study has been performed to evaluate the effectiveness of bat gantries (a form of overpass) (Berthinussen & Altringham, 2012a), and few technical reports were identified in Møller et al. (2016). These studies found that the current recommendations for policy makers and road managers are inadequately implemented or have never been proven to be effective. These uncertainties emphasize the critical need to further test the efficacy of these mitigation methods, which are likely to be implemented across Europe and potentially further afield.

Our overall aim was to evaluate whether bat overpasses, as a recommended mitigation measure, contribute to the restoration of connectivity between habitats fragmented by roads. To achieve this aim, we developed a new methodology based on acoustic flight path reconstruction (AFPR) to better characterize bat flight trajectories in the vicinity of three bat overpasses and to evaluate

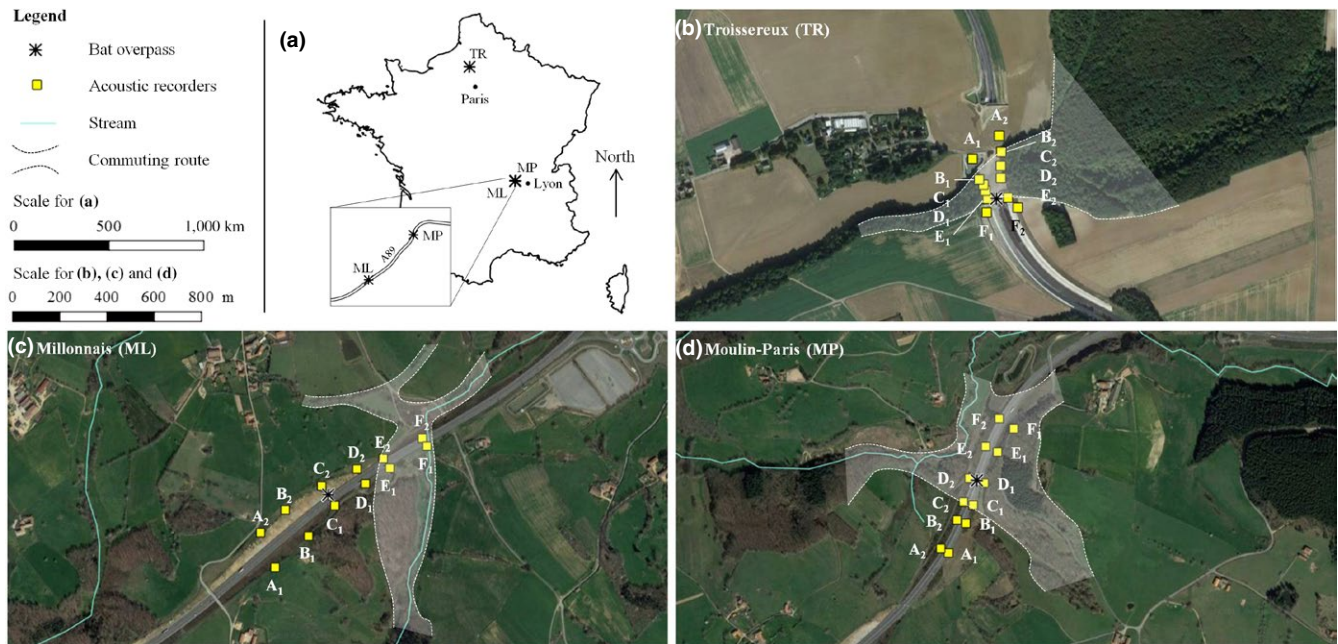


FIGURE 1 (a) Location of the three study sites with an enlarged image of each site with the locations of the overpasses (b, c and d) and the locations of acoustic recorders. Image source: Google Maps (October 2017)

their effectiveness in restoring habitat connectivity. More specifically, we tested two different overpass designs among three sites to determine whether (a) bats cross the road at the location of bat overpasses, (b) bat crossings at bat overpasses were more numerous than at other nearby unmitigated commuting routes identified in the EIAs, (c) bat overpasses placed on known commuting routes were used more frequently than bat overpasses that were located outside the route and (d) bat overpass designs influence the effectiveness of bat crossings when the overpasses are placed along known commuting routes.

2 | MATERIALS AND METHODS

2.1 | Study site

The study was undertaken in France, which experienced a 12% increase in the length of roads between 1995 and 2015 [from 962,000 km to 1,078,000 km (MEEM 2017)], with an additional 673 km planned to be in place by 2030 (DGITM 2011).

We studied three bat overpasses located in rural areas mainly surrounded by woodlands and grasslands. Two overpasses were in the Rhône-Alpes region near Lyon, named Millonnais (ML) (45°50'N, 4°12'E) and Moulin-Paris (MP) (45°51'N, 4°14'E), both crossing the A89 highway which became operational in 2013 (Figure 1). These two sites were separated by 2.3 km and bat overpasses have been permanently installed on this highway since November 2012. The third overpass was in the Picardie region near Beauvais, named Troissereux (TR) (49°28'N, 2°3'E) on the road D901. Construction of the TR road, which occurred between 2015 and 2016, led to the bisection of a large natural wildlife corridor. The mitigation measures planned in the EIA consisted of (a) building a wildlife crossing and (b) installing a bat

overpass at the location where the road bisected the ecological corridor during road construction. Both infrastructures were built in parallel with our monitoring (Figure S1.1, S1.2) before the road became operational in December 2016. The characteristics of the roads are detailed in Table S1.1.

2.2 | Known bat communities and bat commuting routes

During the aforementioned EIAs, bibliographic searches and acoustic surveys (passive and/or active) were conducted for each site by consulting firms (methods detailed in Appendix S1). The main objectives were to detect protected species and identify biodiversity issues (locations of commuting routes, roosting bats and foraging areas) in the areas that would be impacted by the road work.

The bat community at ML and MP included the following species: *Pipistrellus pipistrellus*, *P. kuhlii*, *Eptesicus serotinus*, *Plecotus* spp. and *Myotis myotis/blythii*. A hibernacula of *Barbastella barbastellus*, which is a species of conservation concern, was also reported 700 m away from the A89 (approximately 330 individuals) (Letscher, Prat, & Vincent, 2007). At TR, the bat community was composed of *P. kuhlii*, *P. nathusii*, *P. pygmaeus*, *M. nattereri*, *M. mystacinus*, *M. daubentonii*, *M. bechsteinii*, *M. myotis*, *Myotis* spp., *Nyctalus noctula*, *N. leisleri*, and *Plecotus* spp. Furthermore, in 2012, an important breeding colony of approximately 370 individuals of *M. myotis* was located in a castle of TR, 1.2 km away from the study site (Dupuy & Yobokre, 2014).

Given the methodologies implemented in the aforementioned EIAs (Appendix S1), i.e. the absence of quantitative measures of bat

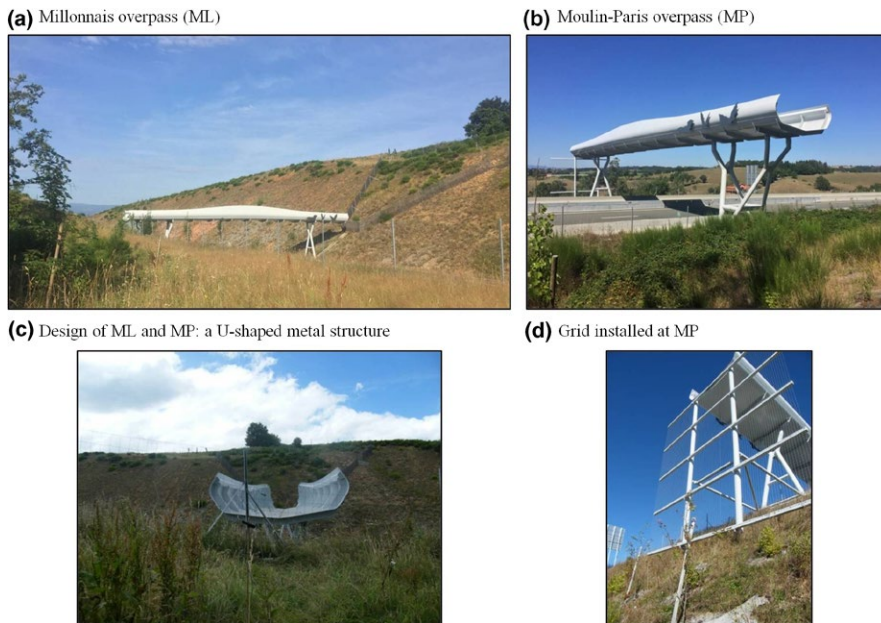


FIGURE 2 Pictures of bat overpasses permanently installed on highway A89 Millonnais (ML) (a, c) and Moulin-Paris (MP) (b, d) near Lyon

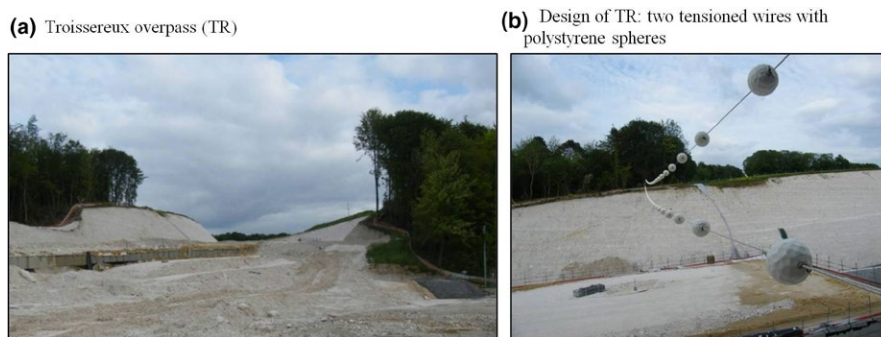


FIGURE 3 Pictures of bat overpass temporarily installed during road construction on road D901 (TR) (a, b) to the north of Paris

activity along the commuting route and the absence of a control site, it was not possible to re-use the data collected before construction to perform a Before-After-Control-Impact analysis.

2.3 | Placement and features of bat overpasses

To mitigate the fragmenting effect of the road and restore connectivity, two overpasses (MP & TR) were placed within the bat commuting routes identified during the preconstruction EIA. Due to technical constraints (the soil had insufficient bearing capacity), the third overpass (ML) was built 325 m away from the identified commuting route (Figure 1c). This preconstruction commuting route was situated at the lowest part of a valley (with a stream) which was backfilled for the road to cross the valley. The stream now flows through a culvert with a 1-m diameter that was obstructed by vegetation during our surveys, precluding bats from using it. Thus, bats had to cross above the road (Figures S1.3,S1.4).

The designs of the bat overpasses were different but were not specifically tested due to the confounding effect of road traffic. Indeed, while the TR overpass had a unique design—wires with polystyrene balls—and was studied at a site without traffic, the two other

sites had similar designs but were studied on a highway that was in operation. ML and MP were designed as U-shaped metal structures (Figure 2a,b,c). At MP, according to the experts who wrote the EIAs, a grid parallel to the road was installed to help bats to better detect the overpass and to force them to fly at a safe height across the road (Figure 2d). The last overpass (TR) comprised two tensioned wires vertically spaced 1.2 m apart with polystyrene spheres each spaced at short intervals on the wires (Figure 3). These polystyrene spheres were designed with a reflective micro-surface to optimize the likelihood of bats receiving sonar echoes while flying (Figure 3b). The wires were stretched between two tall trees and connected to the forest edge. The characteristics of the three bat overpasses are detailed in the Table S1.2.

2.4 | Sampling design

To assess the use of bat overpasses by bats at each site, we placed two automatic acoustic recorders per site (Song Meter SM2Bat+, Wildlife Acoustics Inc.), one on each side of the overpass (henceforth referred to as a "pair"). Acoustic recorders were used to capture stereo recordings with microphones (SMX-US and SMX-U1,

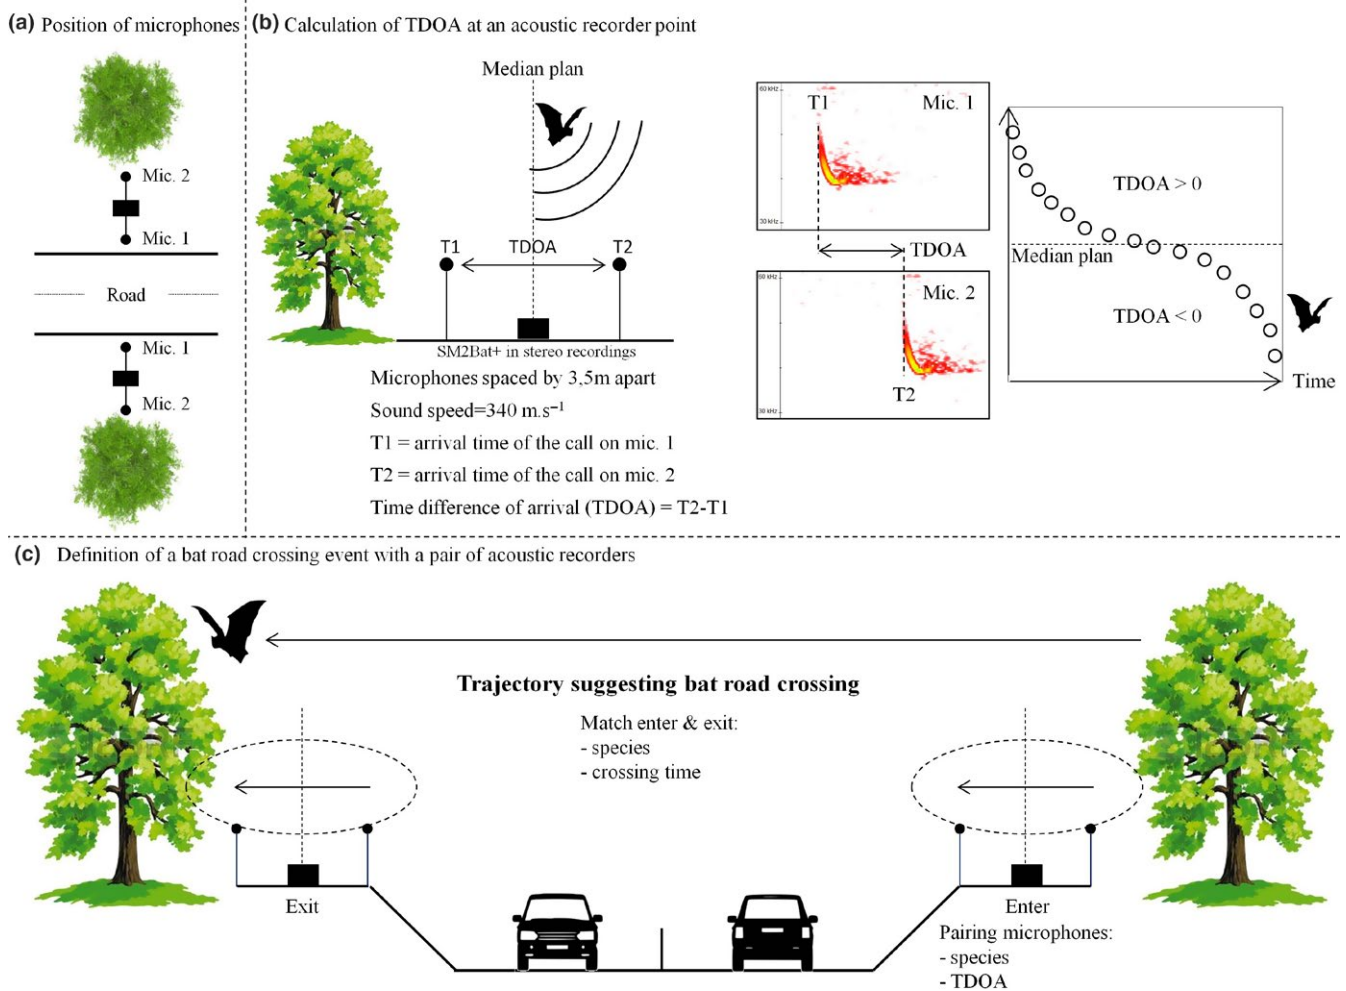


FIGURE 4 (a) Positions of the microphones: the left channel (mic 1) facing the road and the right channel (mic 2) facing the habitat context and perpendicular to the road. (b) Calculation of the time difference of arrival (TDOA). (c) We defined a crossing as when a bat that entered the road on one side was detected exiting the road on the other side. As it was not possible to identify individual bats based on their commuting/foraging calls, we matched entering and exiting using species identity and time elapsed

Wildlife Acoustics Inc.) spaced 3.5 m apart and connected to the same recorder. The microphone on the left channel was always placed facing the road, whereas the microphone on the right channel was placed perpendicular to the road, facing natural habitat (e.g. agricultural land, hedgerow) (Figure 4a). This placement permitted us to characterize the bat crossings based on the AFPR approach.

To determine if bat crossings were more numerous at overpasses compared to other crossings that occurred in the vicinity, we also placed pairs of acoustic recorders spaced at least 25 m apart (\bar{x} : 77.6 m; min: 25.2 m; max: 129.7 m). These additional pairs were placed at each site in the main habitat types present in the vicinity of the overpass (Figure 1). One pair was placed at a location with agricultural land on both sides of the road. This pair was our control pair because open agricultural lands are typically poorly utilised by the bat community considered (Kerbiou et al., 2018).

At the site level, this sampling involved the use of six pairs of acoustics recorders placed in the following six habitats: (a) overpass (O), (b) forest on both sides of the road (F/F), (c) stream on both sides of the road (S/S), (d) forest edge on one side and agricultural land

on the other side (F/A), (e) forest on one side and the hedgerow on the other side (F/H) and (f) agricultural land on each side of the road (A/A).

2.5 | Acoustic surveys

Ultrasonic recordings were collected in the spring and summer of 2016 for four successive nights for TR and five successive nights for ML and MP (at the end of May for TR, in July for ML, and in September for MP) under favourable weather conditions, i.e. without rain, with low wind speed (<7 m/s) and at temperatures higher than 12°C, as recommended by the French national bat-monitoring programme.

The acoustic surveys were performed for the whole night from 30 min before civil sunset to 30 min after civil sunrise. At the site level, all 12 acoustic recorders were operating simultaneously. The detectors were set with a trigger level of 6 dB signal-to-noise ratio and 192 kHz sampling rate on each channel.

As we used two models of omnidirectional ultrasonic microphones, we performed tests to compare their sensitivities. The

results showed no significant difference between microphones (bat pass duration and triggering distance); hence, the data have been analysed without considering the model of microphone as a covariate.

2.6 | Species identification

To identify the species from acoustic recordings, we first used Kaleidoscope© software (Wildlife Acoustics Inc.) to extract .wav files from the recorded .wac files. A time expansion factor of 10 was specified, and we split channels using 5 s as a maximum duration.

Then, we analysed the ultrasound recordings with the software Tadarida (Bas, Bas, & Julien, 2017), which identifies species-specific echolocation calls. This software automatically detects and extracts sound feature parameters of the recorded echolocation calls and classifies them into known classes according to a probability value that a call is from a specific group/bat species using a random forest algorithm (Cutler et al., 2007).

All bat calls involved in bat crossings (bat crossings were detected by the AFPR approach, see below for more details) were checked manually using BatSound© software (Pettersson Elektronik AB, Sweden). In addition to the calls assigned to *P. pipistrellus*, *E. serotinus* and *B. barbastellus*, we constructed three groups (*P. kuhlii/nathusii*, *Plecotus* spp. and *Myotis* spp.), as contacts with these taxa were difficult to identify with certainty (Obriest, Boesch, & Flückiger, 2004).

2.7 | Detection of bat crossings using acoustic flight path reconstruction (AFPR)

To determine the number of bat crossings, we developed an innovative method using AFPR (two open source scripts in R [see Appendix S1] and online repository: <https://github.com/FabienClaireau>).

For each acoustic recorder, we calculated the time difference of arrival (TDOA) for each bat pass, allowing the recorder to detect whether a bat crossed the median plane of the two microphones and in which direction it went. To calculate the TDOA, we needed to obtain the time-frequency features of each echolocation call. For that purpose, the .wav files were processed by the open software Tadarida-L 1.0.2 (Bas et al., 2017; github.com/YvesBas/Tadarida-L).

When the bat was in the left plane, closer to the road than the median plane, the TDOA was a positive value and vice versa (Figure 4b). When a change of sign was observed in more than 10% of the calls, we assumed that the bat had crossed the median plane. According to the spatial design of our microphones (i.e. at a right angle to the road), we could determine whether a bat from outside the road was headed towards the road (TDOA changing from negative to positive), or if a bat coming from the road was exiting the road (TDOA changing from positive to negative) (Figure 4c). Hence, to identify a bat crossing, the detection of a bat on all four microphones was required.

Then, we used species identity and the time elapsed as the two criteria to match the entering and exiting flights on each side of the

road to detect road crossing events. The time elapsed (\bar{x} : 23.21 s; min: 13.1 s; max: 38.6 s) was defined according to the distance between the paired acoustic recorders and the expected bat flight speed (approximately 4–15 m/s) (Figure 4c). A pair of acoustic recorders can detect bats at an average distance of 25 m for common species, such as *Pipistrellus* spp. (Barataud, 2015). This detection distance must be taken into account for the placement of pairs of acoustic recorders along the road to avoid recording and hence counting the same bat with two separate pairs.

2.8 | Statistical analyses

Our sampling design generated the number of bat crossings in different habitat types around the road and bat overpass. In the case where bats randomly crossed the road in any habitat type, we did not expect to detect any significant variations in bat crossings between these habitats. However, in the case where a bat overpass was used more frequently by bats to cross the road than other areas, we expected a greater number of bat crossings at the location of the bat overpass than within the surrounding habitat. Finally, if bats continued to cross the road by moving along the commuting route rather than using the overpass (Figure 1), we expected to have a greater number of bat crossings along the commuting route.

The first analysis assessed whether there was an overall effect of bat overpasses on bats (placement and features were combined such as the design of bat overpass, traffic and type of road). For this purpose, we evaluated the habitat types that contained the greatest number of bat crossings, and compared the number of crossings among them. This analysis was performed for all pairs in the three sites with a generalized linear mixed model (GLMM, R package glmmADMB; Skaug, Fournier, Bolker, Magnusson, & Nielsen, 2014). The response variable in our analyses was the number of bat crossings for all species (bat crossings) and the explanatory variable was the habitat type ($n = 6$). According to the nature of our response variable (count data), we performed a zero-inflated GLMM with a negative binomial error distribution (link=log) (Zuur, Ieno, Walker, Saveliev, & Smith, 2009). We included a first random effect of date in the model because all recorders ran simultaneously on the same night, allowing us to implicitly account for the conditions that night, such as the effects of weather. In addition, we included a second random effect of the pair of acoustic recorders nested in the site to account for the hierarchical sampling design. Bat crossings at the overpass were used as the reference (i.e. intercept) in the model. The difference in the number of survey nights between sites was taken into account with the random effect structure (pairs nested in site). The full model was written as follows:

$$\text{Bat crossings} \sim \text{Habitat types} + 1|\text{Date} + 1|\text{Site/Pairs}$$

As we only had one explanatory variable, there was no model selection process. However, we compared it to a null model based on the Akaike weight of each model. We aimed to evaluate whether the quality of our model was good by comparing it to the null model

(including only the random effects) using Akaike's information criterion (AIC) (MacNally, Duncan, Thomson, & Yen, 2017).

The second analysis assessed the effect of each single bat overpass by determining whether the number of bat crossings was higher at each overpass than in the surrounding habitat. We applied a similar GLMM (i.e. zero-inflated, negative binomial and a random effect on date), but performed the analysis separately at each site. Thus, we used one full model for each site. The response variable in our analyses was the number of bat crossings for all species (bat crossings) and the explanatory variable was composed of the pairs of acoustic recorders (pairs). Bat crossings at the overpass were used as the reference (i.e. intercept) in each model. The full model was written as follows:

$$\text{Bat crossings} \sim \text{Pairs} + 1|\text{Date}$$

We also compared this model to a null model based on the AIC. Finally, when we wanted to compare the sites, we used the ratio between bat crossings and bat passes in each site. Thus, the difference in the number of recording nights between sites did not bias the results.

3 | RESULTS

3.1 | Bat detections and bat crossings

For the three study sites, we recorded 57,941 bat passes (for details at the site level, see Table S3.1); within these bat passes, we detected 284 bat crossings (ML: 37, MP: 67 and TR: 180) for the six evaluated species. Species of conservation concern identified by EIAs [*B. barbastellus* (for ML and MP) and *M. myotis* (for TR)] were detected during our survey. However, detections were rare, precluding meaningful statistical analysis at the species level. Among the 284 bat crossings detected, the species with sufficient occurrences for the assessment of bat road crossings were *P. pipistrellus* at 73% ($n = 208$) and *P. kuhlii/nathusii* at 22% ($n = 61$). Details on bat crossings are presented in Table S4.1 and S4.2.

At ML, 37 bat crossings were detected; 19% occurred at the bat overpass ($n = 7$), whereas 65% occurred where the road crossed the commuting route identified by the EIA ($n = 24$). The remaining 16% of the bat crossings were located in other habitat types ($n = 6$). At MP, 67 bat crossings were recorded; 39% were detected where the overpass was installed ($n = 26$), whereas 51% occurred where the road crossed the previously identified commuting route ($n = 34$). The remaining 10% of the bat crossings were located in other habitat types ($n = 7$). At TR, 180 bat crossings were recorded; 54% were detected where the overpass was installed ($n = 97$), whereas 43% occurred where the road crossed the previously identified commuting route ($n = 77$). The remaining 3% of the bat crossings were located on agricultural land (control sample) ($n = 6$).

3.2 | Effect of the overpasses on flight crossings

Our analyses demonstrated that bats do not cross the road randomly. Our control pair of microphones, i.e. agricultural land on both sides of the road ('A/A'), recorded the lowest number of bat crossings (Figure 5, Table S4.1). Furthermore, when we analysed the overall effect of bat overpasses in comparison to the surrounding habitat without overpasses, we found no difference in the number of bats crossing between the bat overpass and the stream on both sides of the road, or between the bat overpass and the forest/hedgerow (Table 1), which were two categories with limited samples (Table 1). As the habitat type with the stream on both sides of the road ('S/S') is only present in one site, with only one pair of microphones replicated for five nights, we ran the model without these data and found similar results (Table S5.1). Moreover, it is noteworthy that we found similar patterns when we used the ratio of crossings (i.e. the ratio between the number of bat crossings and bat passes) as the response variable instead of the number of bat crossings (Table S5.2).

Then, at the site level (for MP and TR), bat crossings were more numerous at the location of the bat overpass in comparison

TABLE 1 Estimates, standard errors (SE) and p -value for the number of bat crossings according to habitat types for each pair of detectors at each site. Comparisons of bat crossings between overpass pairs and the other pairs were calculated at the site scale by generalized linear mixed model (GLMM) (Bat crossings \sim Habitat types + 1|Date + 1|Site/Pairs). Bat crossings at the overpass were used as the reference (i.e. intercept) in the model. The estimates and SE were the gaps at the intercept. Back-transformed values were the values corresponding to the category

Habitat types per pair	n	Estimates	SE	z value	p -value	Back-transformed value
Overpass (intercept)	14	1.812	0.481	/	/	6.123 (3.785, 9.905)
Agricultural land/ Agricultural land	18	-2.954	0.547	-5.4	<0.001	0.319 (0.172, 0.593)
Forest/ Agricultural land	15	-1.026	0.508	-2.02	0.043	2.197 (1.240, 3.892)
Forest/Forest	27	-0.869	0.38	-2.29	0.022	2.570 (1.602, 4.125)
Forest/ Hedgerow	5	-1.362	0.832	-1.64	0.102	1.568 (0.658, 3.740)
Stream/Stream	5	-0.833	0.77	-1.08	0.279	2.664 (1.191, 5.960)

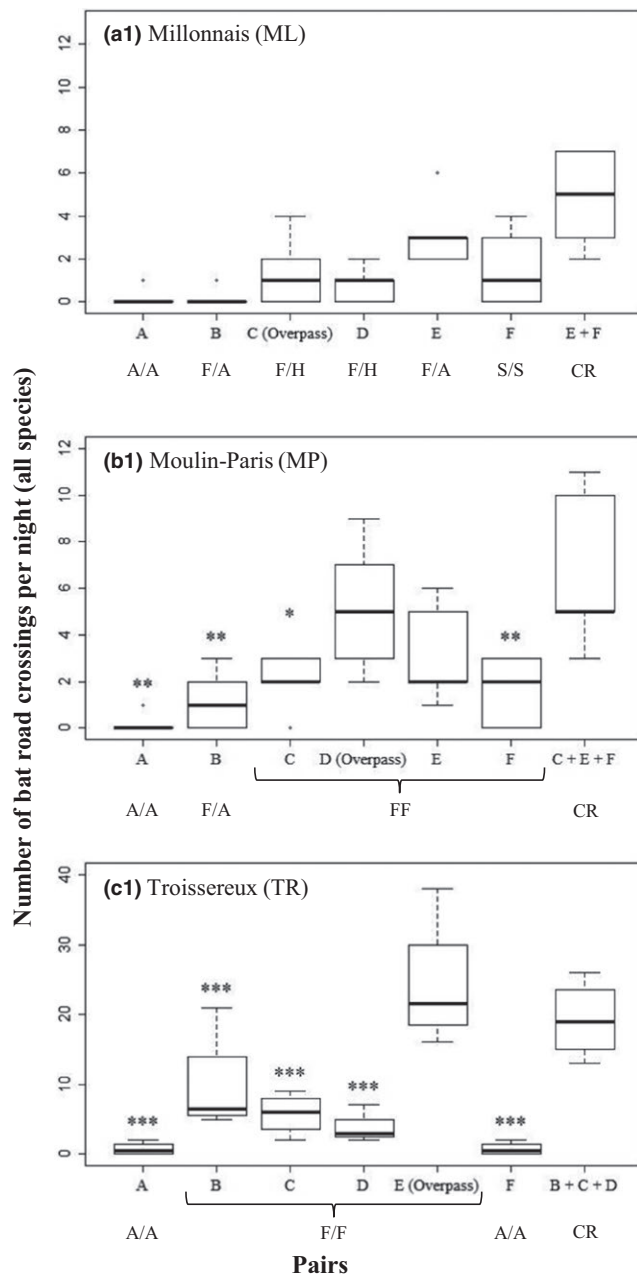


FIGURE 5 Number of bat road crossings per night for all bats (raw data) per pair of acoustic recorders per overpass (a1, ML; b1, MP; c1, TR). Table S4.1 lists the number of bat crossings per pair. The habitat types (A, agricultural land; F, forest; H, hedgerow; S, stream; CR, commuting route) are included under the number of pairs. Comparisons of bat crossings between overpass pairs and the other pairs were conducted at the site scale by GLMM (Bat crossings ~ Pairs + 1|Date). Bat crossings at the overpass were used as the reference (i.e. intercept) in each model (*** $p < 0.001$; ** $p < 0.01$; * $p < 0.05$)

to the other locations (Figure 5, Table S4.1). At MP, we found significantly fewer bat crossings at the control pair of microphones ('A/A') ($p < 0.001$), at forest/agricultural land ('F/A') ($p < 0.001$), and for two of three pairs on both sides of the road in the same forest ('F/F') ($p < 0.01$; $p < 0.001$) compared to the bat overpass

(Figure 5b1). At TR, we found significantly more bat crossings at the bat overpass than at all the other pairs ($p < 0.001$) (Figure 5c1). However, at ML, we did not detect any difference in the number of bat crossings between the bat overpass and other habitat types (Figure 5a1).

It is also noteworthy that we had a change in AIC greater than 10 between the full models and the null models (Table S5.3).

3.3 | Bat crossings at the overpass and at the unmitigated commuting route

When we compared the number of bat crossings at the bat overpass to the sum of the crossings at other locations without overpasses along the commuting corridor (CR) (as identified during the EIA), we obtained conflicting results. Considering the length of the bat commuting route and our sampling design (number of pairs within commuting route and interval distance between pairs), we covered approximately 57% of the width of the commuting route at ML, 39% at MP and 100% at TR.

At ML, where two pairs were placed along the commuting route and where the overpass was built 325 m away from the commuting route identified by the EIA, bats crossed the road 3.4 times more often at the unmitigated commuting route than at the location of the bat overpass (Figure 5a1). At MP, where four pairs were placed along the commuting route (including the bat overpass), bats crossed the road 1.3 times more frequently at the sites along the commuting route that did not include the overpass (forest) than at the location of the bat overpass (Figure 5b1). At TR, where four pairs were placed along the commuting route (including the bat overpass), bats crossed the road 1.3 times more frequently at the location of the bat overpass than at the rest of the commuting route without the overpass (forest) (Figure 5c1). Finally, we found similar patterns for the most abundant species, *P. pipistrellus* and *P. kuhlii/nathusii* (Figure S6.1).

Again, the full models had an AIC 10 points higher than the null model (Table S5.3).

4 | DISCUSSION

4.1 | Bat crossings at the bat overpasses

We demonstrate that some bats cross the road at the locations of bat overpasses. However, this does not prove their effectiveness at restoring habitat connectivity because these numbers could not be compared to the pre-bat overpass construction numbers.

4.2 | Bat crossings at the bat overpasses compared to the surrounding habitat including the unmitigated commuting route

Overall, our results show that bat overpasses are more successful when they are placed in a location with forested areas on both side of the road and that they are avoided when placed in open habitats

such as farmland. The avoidance of flight across open areas is common in numerous species (Frey-Ehrenbold et al., 2013). In contrast, we found no difference between the number of bat crossings at the location of the overpass and at pairs with a stream on both sides of the road ('S/S'). This was expected as it is well documented that bats use linear aquatic habitats to commute and forage (Hale et al., 2012). At ML, bat crossings were 3.4 times more frequent along the commuting route identified by the EIA study than at location of the bat overpass. Surprisingly, we recorded twice as many bat crossings at microphone pair E with forest-agricultural land ($n = 16$) than at pair F, where the stream is present on both sides of the road ($n = 8$) (Figure 5a1, Figure S1.3, S1.4, Table S4.1). These results suggest a modification of the main commuting route after the construction of the road (pair F to pair E). This interpretation cannot be confirmed in the absence of a Before-After-Control-Impact (BACI) approach, emphasizing the need to include the AFPR methodology at the earliest stage of EIA and not only post-construction.

At MP and TR, 57% and 55%, respectively, of the bat crossings were at the location of the bat overpass, which was installed along the commuting route identified during the EIAs. Even though we detected two to six times more crossings at the location of the bat overpass compared to any other pair individually (Figure 5b1, c1, Table S4.1), when the number of bat crossings across the commuting route (excluding those along the overpass) were summed, we detected the same proportion of bat crossings compared to the overpass (MP: 43%; TR: 44%). Furthermore, bat crossings along the commuting route are probably underestimated because the pairs did not cover the full width of the commuting route at ML and MP (57% and 39% coverage). Thus, the number of bat crossings along the unmitigated part of the commuting route is higher than presently estimated for these two sites.

Finally, although we do not know whether the proportion of bat crossings at the commuting route after the construction of the road was the same as it was after the installation of the overpasses, we believe that this mitigation measure failed to fully restore habitat connectivity, since a large proportion of bat crossings occurred along the commuting routes and not at the overpass. Overall, bat crossings are dispersed over the entire width of the commuting route (100–330 m in length, Figures 1 and 5) and are not restricted to overpass sites.

4.3 | Influence of bat overpass placement and/or their features

The ML bat overpass was built 325 m away from the identified commuting route because of technical constraints. Our results demonstrate that bats did not make a detour to cross the road at the location of the bat overpass. Bats continued to cross the road where the commuting route was identified before the construction (Letscher, 2007). Hence, although this is based on a limited number of sites investigated, a bat overpass is more likely to fail to restore connectivity when it is not positioned where the commuting route was identified.

In the case of bat overpasses placed within a commuting route (MP and TR), our results showed a greater use of the overpass at TR than at MP. Indeed, the ratio between bat crossings and bat passes at MP was 15 times lower than that at TR. The first hypothesis to explain these results is the absence of vehicular traffic at TR. A second non-mutually exclusive hypothesis is the influence of the overpass design, which seems to be more effective when it consists of ropes with polystyrene balls stretched between tall trees than when it is a U-shaped metal structure. The absence of a gap between the bat overpass and the trees possibly allows a better continuity with the forest edge. Moreover, the wires at TR were positioned directly at the flight height of the bats (<2 m). A third non-mutually exclusive hypothesis is the influence of the road profile; at TR, the shoulders are higher than the road, while at MP, one side is lower than the road while the other is higher. These results suggest that the effectiveness of overpasses placed within the commuting route is likely to be influenced by several variables and their interaction (e.g. topography, habitat), highlighting the need for further research.

4.4 | Limitations and benefits of the AFPR approach to identifying bat crossings

To detect bat crossings, we developed an innovative method using an AFPR approach. However, this method did not allow us to measure whether bats fly at safe heights above traffic when crossing at bat overpasses. Furthermore, not all bat crossings are detected. Indeed, the condition that must be met to obtain a bat crossing is that the bat is detected by the four microphones. This is highly linked with the distance of detection of the bat (Barataud, 2015), which varies among species according to the average intensity of their calls (in dB) and the directionality of the sound emitted. This constraint is important for species that have a very narrow echolocation system oriented forward such as *Rhinolophus ferrumequinum* (distance of detection of 5 m; Barataud, 2015). Regardless of the habitat type considered, the proportion of bat crossings detected was very low compared to the number of bat passes recorded (2% of the number of bat passes were bat crossings). A field trial would be necessary to objectively compare the automated AFPR approach with direct field observations based on thermal imaging videos.

Although the AFPR method only detected a subset of the bat crossings, there is no reason to believe the pattern observed (i.e. variation between pairs or habitat types or with vs. without an overpass) would be biased towards greater/lower detection in different habitats or environments.

4.5 | Usability of the AFPR approach

AFPR is suitable for a repeatable non-biased BACI studies design (e.g. before and after traffic is introduced to a new road) and it does not depend on the experience of the experimenter, in contrast to direct visual observations, which require extensive training. This

innovative method could be included in EIA studies to perform before and after surveys. Such a flight behaviour monitoring system can also be included in EIAs concerned with any kind of development projects, including, for example, wind turbine establishment (Roemer, Disca, Coulon, & Bas, 2017). Most consulting firms already have such equipment (acoustic recorders for stereo recordings) for bat species inventories and can use the methodology developed herein. The use of this method allows automated monitoring throughout the night and does not require the attendance of specialized staff, which drastically reduces the cost of the study. Moreover, the software *Tadarida* and our scripts are open source and freely available.

4.6 | Management implications

Some bats crossed the road at the location of bat overpasses that were installed within their commuting routes. However, our results demonstrate that the two types of bat overpasses investigated in this study did not fully restore habitat connectivity, despite being specifically designed to do so.

These conclusions also highlight the importance of the EIA to propose measures to effectively avoid fragmentation (e.g. changing the road layout). However, if avoidance is impossible, wildlife overpasses or underpasses (especially the latter) should be favoured (Møller et al., 2016). It is imperative to carry out monitoring prior to road construction to identify commuting routes used by bats.

Moreover, as shown here at one site, road construction can modify bat commuting routes. As bats seem to avoid making a detour to use bat overpasses to cross the road (Berthinussen & Altringham, 2012a; Czerniak, Miler, Sylwester, Bernard, & Marcin, 2013; O'Connor & Green, 2011; Schut et al., 2013), it seems imperative to correctly place the overpass where the post-construction commuting route will be. To determine the placement of these mitigation measures, EIAs should use a BACI design, i.e. identifying the existing flight path and quantifying the flow of bats along a commuting route before and after road construction (Møller et al., 2016). The before phase provides an initial state against which it is possible to evaluate the efficacy of the mitigation measures, and post-construction monitoring should be compulsory.

Due to lack of knowledge, the implementation of mitigation measures without clear evidence for their effectiveness is, unfortunately, common, highlighting the need already expressed in the literature to monitor offset measures over time (Quétier, Regnery, & Levrel, 2014). To fill in this knowledge gap and provide EIA studies with scientific data on which to base their recommendation, before and after analyses should be systematically carried out and the data made publicly available to inform meta-analyses.

ACKNOWLEDGEMENTS

We would like to sincerely thank our partners, especially Cédric Heurtebise and Philippe Chavaren from VINCI-autoroutes and Jean-François Drevet from Bouygues Construction, who allowed us to conduct our study. We

would also like to thank Lenaïc Roussel from Naturalia Environnement, Mélanie Higoa from FRAPNA-Loire and EGIS Environnement for their assistance with the fieldwork. The authors declare that there are no conflicts of interest. Funding for this work was provided through Naturalia Environnement and ANRT (CIFRE grant, number: 2015/0893). We are grateful to the Associate Editor, Matthew Struebig, Isobel M. Abbott and a second anonymous reviewer for providing valuable comments that greatly strengthened this manuscript. This is contribution ISEM 2018-228 of the Institut des Sciences de l'Evolution de Montpellier.

AUTHORS' CONTRIBUTIONS

F.C., Y.B., S.J.P., B.A. and C.K. devised the study. F.C., Y.B. and C.K. implemented the study. F.C. collected the data. F.C. and Y.B. wrote the scripts to characterize the bat crossings. F.C. and C.K. analysed the data and led the writing of the manuscript. All authors critically contributed to the draft of the manuscript and gave their final approval for its publication.

DATA ACCESSIBILITY

Acoustic data are available via the Dryad Digital Repository <https://doi.org/10.5061/dryad.vn36290> (Claireau et al., 2018).

Raw acoustic data are also archived and available via the French citizen science programme "VigieChiro" (<http://vignature.mnhn.fr/page/participer-vigie-chiro>), at the portal <http://vigiechiro.herokuapp.com/> with the following site ID: 420395, 420420, 420421 and 600548.

ORCID

Fabien Claireau  <http://orcid.org/0000-0003-3848-7427>

Yves Bas  <http://orcid.org/0000-0003-4249-1429>

Sébastien J. Puechmaille  <http://orcid.org/0000-0001-9517-5775>

Christian Kerbiriou  <http://orcid.org/0000-0001-6080-4762>

REFERENCES

- Abbott, I. M., Berthinussen, A., Stone, E., Boonman, M., Melber, M., & Altringham, J. (2015). Bats and Roads. In R. van der Ree, D. J. Smith, & C. Grilo (Eds.), *Handbook of Road Ecology* (pp. 290–299). Chichester, UK: John Wiley & Sons Ltd.
- Abbott, I. M., Butler, F., & Harrison, S. (2012). When flyways meet highways – The relative permeability of different motorway crossing sites to functionally diverse bat species. *Landscape and Urban Planning*, 106, 293–302. <https://doi.org/10.1016/j.landurbplan.2012.03.015>
- Barataud, M. (2015). *Acoustic Ecology of European Bats; Species Identification, Study of Their Habitats and Foraging Behaviour* (tran A Cockle-Betian). Paris; Biotope, Mèze: National Museum of Natural History.
- Bas, Y., Bas, D., & Julien, J.-F. (2017). Tadarida: A toolbox for animal detection on acoustic recordings. *Journal of Open Research Software*, 5, 4823. <https://doi.org/10.5334/jors.154>
- Bennett, V. J., & Zurcher, A. A. (2013). When corridors collide: Road-related disturbance in commuting bats. *The Journal of Wildlife Management*, 77, 93–101. <https://doi.org/10.1002/jwmg.467>

- Berthinussen, A., & Altringham, J. (2012a). Do bat gantries and underpasses help bats cross roads safely? *PLoS ONE*, 7, e38775. <https://doi.org/10.1371/journal.pone.0038775>
- Berthinussen, A., & Altringham, J. (2012b). The effect of a major road on bat activity and diversity: Effect of a major road on bat activity. *Journal of Applied Ecology*, 49, 82–89. <https://doi.org/10.1111/j.1365-2664.2011.02068.x>
- Bezombes, L., Gaucherand, S., Kerbirou, C., Reinert, M.-E., & Spiegelberger, T. (2017). Ecological equivalence assessment methods: What trade-offs between operationality, scientific basis and comprehensiveness? *Environmental Management*, 60, 216–230. <https://doi.org/10.1007/s00267-017-0877-5>
- Claireau, F., Bas, Y., Puechmaile, S. J., Julien, J.-F., Allegrini, B., & Kerbirou, C. (2018). Data from: Bat overpasses: An insufficient solution to restore habitat connectivity across roads. *Dryad Digital Repository*, <https://doi.org/10.5061/dryad.vn36290>
- Council of the European Union. (1992). Council Directive 92/43/EEC of 21 May 1992 on the Conservation of Natural Habitats and of Wild Fauna and Flora.
- Cutler, D. R., Edwards, T. C., Beard, K. H., Cutler, A., Hess, K. T., Gibson, J., & Lawler, J. J. (2007). Random forests for classification in ecology. *Ecology*, 88, 2783–2792. <https://doi.org/10.1890/07-0539.1>
- Czerniak, A., Miler, A. T., Sylwester, G., Bernard, O., & Marcin, P. (2013). *Funkcjonalność Bramowych Przejść dla Nietoperzy, Wybudowanych Na Trasie S-3. [Functionality of a wildlife crossing for bats constructed over the S-3 expressway]*. Uniwersytet Przyrodniczy w Poznaniu.
- DGITM. (2011). *Schéma National Des Infrastructures de Transport*. Ministère de l'Écologie, du Développement durable, des Transports et du Logement.
- Dulac, J. (2013). *Global Land Transport Infrastructure Requirements; Estimating Road and Railway Infrastructure Capacity and Costs to 2050*. International Energy Agency.
- Dupuy, A., & Yobokre, R. (2014). *Projet de Déviation RD 901 Troissereux (60); Dossier de Demande de Dérogation Aux Interdictions de Destruction d'espèces Animales et d'habitats d'espèces Animales Protégées*. Biositiv, D3 Société de la déviation de Troissereux.
- Eigenbrod, F., Hecnar, S., & Fahrig, L. (2009). Quantifying the road-effect zone: Threshold effects of a motorway on anuran populations in Ontario, Canada. *Ecology and Society*, 14, 2441. <https://doi.org/10.5751/ES-02691-140124>
- Fensome, A. G., & Mathews, F. (2016). Roads and bats: A meta-analysis and review of the evidence on vehicle collisions and barrier effects. *Mammal Review*, 46, 311–323. <https://doi.org/10.1111/mam.12072>
- Fontaine, B., Bouchet, P., Vanachterberg, K., Alonsozarazaga, M., Araujo, R., Asche, M., ... Bailly, N. (2007). The European Union's 2010 target: Putting rare species in focus. *Biological Conservation*, 139, 167–185. <https://doi.org/10.1016/j.biocon.2007.06.012>
- Forman, R. T. T., & Alexander, L. E. (1998). Roads and their major ecological effects. *Annual Review of Ecology and Systematics*, 29, 207–231. <https://doi.org/10.1146/annurev.ecolsys.29.1.207>
- Forman, R. T. T., Sperling, D., Bissonette, J. A., Clevenger, A. P., Cutshall, C. D., Dale, V. H., ... Winter, T. C. (2003). *Road ecology: Science and solutions*. Washington, DC: Island Press.
- Frey-Ehrenbold, A., Bontadina, F., Arlettaz, R., & Obrist, M. K. (2013). Landscape connectivity, habitat structure and activity of bat guilds in farmland-dominated matrices. *Journal of Applied Ecology*, 50, 252–261. <https://doi.org/10.1111/1365-2664.12034>
- Hale, J. D., Fairbrass, A. J., Matthews, T. J., & Sadler, J. P. (2012). Habitat composition and connectivity predicts bat presence and activity at foraging sites in a large UK conurbation. *PLoS ONE*, 7, e33300. <https://doi.org/10.1371/journal.pone.0033300>
- Kerbirou, C., Azam, C., Touroult, J., Marmet, J., Julien, J.-F., & Pellissier, V. (2018). Common bats are more abundant within Natura 2000 areas. *Biological Conservation*, 217, 66–74. <https://doi.org/10.1016/j.biocon.2017.10.029>
- Kitzes, J., & Merenlender, A. (2014). Large roads reduce bat activity across multiple species. *PLoS ONE*, 9, e96341. <https://doi.org/10.1371/journal.pone.0096341>
- Krauss, J., Bommarco, R., Guardiola, M., Heikkinen, R. K., Helm, A., Kuussaari, M., ... Steffan-Dewenter, I. (2010). Habitat fragmentation causes immediate and time-delayed biodiversity loss at different trophic levels: Immediate and time-delayed biodiversity loss. *Ecology Letters*, 13, 597–605. <https://doi.org/10.1111/j.1461-0248.2010.01457.x>
- Letscher, R. (2007). *Expertise "Chiroptères" Dans Le Cadre Des Études Préalables à La Réalisation de l'A89 Tronçon Balbigny – Violay (Loire); 1ère Phase: Inventaire Estival Des Chiroptères*. Centre Ornithologique Rhône-Alpes, Groupe Chiroptères Rhône-Alpes.
- Letscher, R., Prat, C., & Vincent, S. (2007). *Expertise "Chiroptères" Dans Le Cadre Des Études Préalables à La Réalisation de l'A89 Tronçon Balbigny – Violay (Loire); 1ère Phase: Synthèse Des Données Existantes, Prospections Préliminaires*. Centre Ornithologique Rhône-Alpes, Groupe Chiroptères Rhône-Alpes.
- MacNally, R., Duncan, R. P., Thomson, J. R., & Yen, J. D. L. (2017). Model selection using information criteria, but is the 'best' model any good? *Journal of Applied Ecology*, 55, 1441–1444. <https://doi.org/10.1111/1365-2664.13060>
- Maxwell, S. L., Fuller, R. A., Brooks, T. M., & Watson, J. E. M. (2016). Biodiversity. The ravages of guns, nets and bulldozers. *Nature*, 536, 143–145. <https://doi.org/10.1038/536143a>
- Medinas, D., Marques, J. T., & Mira, A. (2013). Assessing road effects on bats: The role of landscape, road features, and bat activity on road-kills. *Ecological Research*, 28, 227–237. <https://doi.org/10.1007/s11284-012-1009-6>
- MEEM. (2017). *Chiffres Clés Du Transport – Édition 2017*. Ministère de l'environnement, de l'énergie et de la mer, en charge des relations internationales sur le climat.
- Møller, J. D., Dekker, J., Baagøe, H. J., Garin, I., Alberdi, A., Christensen, M., & Elmeros, M. (2016). *Effectiveness of mitigating measures for bats – A review*. CEDR Transnational Road Research Programme.
- Obrist, M. K., Boesch, R., & Flückiger, P. F. (2004). Variability in echolocation call design of 26 Swiss bat species: Consequences, limits and options for automated field identification with a synergetic pattern recognition approach. *Mammalia*, 68, 307–322. <https://doi.org/10.1515/mamm.2004.030>
- O'Connor, G., & Green, R. (2011). *A review of bat mitigation in relation to highway severance*. Highways Agency.
- Pinaud, D., Claireau, F., Leuchtmann, M., & Kerbirou, C. (2018). Modelling landscape connectivity for greater horseshoe bat using an empirical quantification of resistance. *Journal of Applied Ecology*, 55, 2600–2611. <https://doi.org/10.1111/1365-2664.13228>
- Quétiér, F., Regnery, B., & Levrel, H. (2014). No net loss of biodiversity or paper offsets? A critical review of the French no net loss policy. *Environmental Science & Policy*, 38, 120–131. <https://doi.org/10.1016/j.envsci.2013.11.009>
- Roemer, C., Disca, T., Coulon, A., & Bas, Y. (2017). Bat flight height monitored from wind masts predicts mortality risk at wind farms. *Biological Conservation*, 215, 116–122. <https://doi.org/10.1016/j.biocon.2017.09.002>
- Rudolph, D. C., Burgdorf, S. J., Conner, R. N., & Schaefer, R. R. (1999). Preliminary evaluation of the impact of roads and associated vehicular traffic on snake populations in eastern Texas. In G. L. Evink, P. Garrett, & D. Zeigler (Eds.), *Proceedings of the Third International Conference on wildlife ecology and transportation* (pp. 129–136). Tallahassee, FL: FL-ER-73-99. Florida Department of Transportation.
- Saunders, D. A., Hobbs, R. J., & Margules, C. R. (1991). Biological consequences of ecosystem fragmentation: A review. *Conservation Biology*, 5, 18–32. <https://doi.org/10.1111/j.1523-1739.1991.tb00384.x>
- Schut, J., Limpens, H., La Haye, M., van der Heide, Y., Koelman, R., & Overman, W. (2013). *Belangrijke Factoren Voor Het Gebruik van*

- Hop-Overs Door Vleermuizen over Wegen. Veldonderzoek Bij Sumar En Gieten.* Feanwâlden: Altenburg & Wymenga ecologisch onderzoek.
- Skaug, H. J., Fournier, D. A., Bolker, B. M., Magnusson, A., & Nielsen, A. (2014). Generalized linear mixed models using AD model builder.
- Smith, D. J., van der Ree, R., & Rosell, C. (2015). Wildlife crossing structures: An effective strategy to restore or maintain wildlife connectivity across roads. In R. van der Ree, D. J. Smith, & C. Grilo (Eds.), *Handbook of Road Ecology* (pp. 172–183). Chichester, UK: John Wiley & Sons Ltd.
- Trombulak, S. C., & Frissell, C. A. (2000). Review of ecological effects of roads on terrestrial and aquatic communities. *Conservation Biology*, 14, 18–30. <https://doi.org/10.1046/j.1523-1739.2000.99084.x>
- Zurcher, A. A., Sparks, D. W., & Bennett, V. J. (2010). Why the bat did not cross the road? *Acta Chiropterologica*, 12, 337–340. <https://doi.org/10.3161/150811010X537918>
- Zuur, A. F., Ieno, E. N., Walker, N. J., Saveliev, A. A., & Smith, G. M. (2009). *Mixed effects models and extensions in ecology with R*. New York, NY: Springer-Verlag. <https://doi.org/10.1007/978-0-387-87458-6>

SUPPORTING INFORMATION

Additional supporting information may be found online in the Supporting Information section at the end of the article.

How to cite this article: Claireau F, Bas Y, Puechmaille SJ, Julien J-F, Allegrini B, Kerbiriou C. Bat overpasses: An insufficient solution to restore habitat connectivity across roads. *J Appl Ecol*. 2018;00:1–12. <https://doi.org/10.1111/1365-2664.13288>