

When you use the world's best cable...



...shouldn't you reinforce it with the world's strongest plug?

Presenting Fit & Forget Patch Cords from Telekonnectors

When you've spent millions of dollars on your cabling system, how could a pesky connector get in the way? Haven't broken connectors forced you to cut, shorten, alter and disfigure your patch cords again and again and again?

Well, it won't happen anymore.

Bid goodbye to troublesome patch cords with the most durable connector in the world. What's more these patch cords can be supplied with the cable of your choice! So call us today to get rid of the patch cord headache... permanently!

Unbreakable - unique first-of-its-kind plug

Patented Reverse Pivot Design


Lengthier body & longer latch for easier use

50µ' gold plated contacts for best-in-class contact and reliable transmission

Available with any Unshielded Twisted Pair (UTP) cables - CAT 5, CAT 5E, CAT 6...

Custom length, colour, termination available on request

N-Q-A-W (No Questions Asked Warranty):
3 years

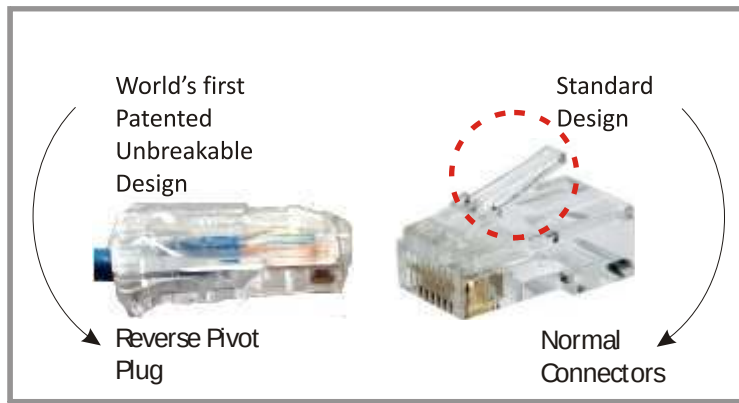

Endpoint Solutions

Length is Strength

Is the standard 2 meters too short or too long? Not to worry, these can be customised to any length with any termination.



Colourful or Customised

Available in orange, yellow, light blue and dark blue. Can be customised to any specific colour or with any brand of cables.

Invisible yet Invincible

Fit & Forget (F&F) Cables are not just immortal by design. They secure your cables with near invisible locking.

Conference Room Solutions



Custom with Wisdom

Do LAN cables vanish mysteriously from your conference room? Get tamper proof solutions to lock them into your wall jacks permanently. Why should a LAN cable search stall your google search?

Retract to Expand

Make out-of-reach laptops in your conference room a thing of the past. F&F retractable cables come with a standard length of 2 meters - 1.75 m on the jack side and 0.25 m on the other side. Now your conference rooms will sport a clean look!

Server Interconnects

F&F Server interconnects come in a standard 9 inches length. It is possible to customise these into varying lengths.

Specifications

Description

Unshielded Twisted Pair (UTP) cable - 4-pair - horizontal

Technical Details

Materials

Insulator - Polyethylene, 1.12 mm nom. Dia
Conductor - 24 AWG – Stranded Bare Copper
Jacket - PVC, 6.1 nom. Dia

Electrical Characteristics

Impedance - $100\Omega \pm 15\%$, 1 MHz to 350 MHz
Propagation Delay - 538 ns/100 m max. @ 100 MHz
Skew - 25 ns max
Mutual Capacitance - 5.6 nF max/100 m
Conductor Resistance- 9.38Ω max/100 m
Voltage - 300 Volts AC or DC

Termination

TLK Patented K Plug

Housing - Polycarbonate, UL 94V-0
Contact - Phosphor Bronze
Plating - Gold Contact, 50µ'

Also available in Systemax, AMP Net Connect, Digi Link, or Panduit cables- to suit customer needs/ requirements.



Teleconnectors
www.teleconnectors.com

Enquiries:

sales@teleconnectors.com

Systemax, AMP Netconnect, Digilink and Panduit are registered trade names and registered trademarks of respective owners. F&F patch cords are an exclusive offering from TLK and are not certified/approved by the referred cable manufacturers.