


Enhanced performance cable for transmission of high speed data, digital and analogue voice and video (RGB) signals on LANs. Supports Gigabit Ethernet (1000 baseT) standard. Operates at bandwidth of 250 MHz. This cable well exceeds the requirements of TIA/EIA-568-C.2.

Applications:

- Suitable for Noisy Environments
- Near Power Lines
- High EMI Interference surroundings

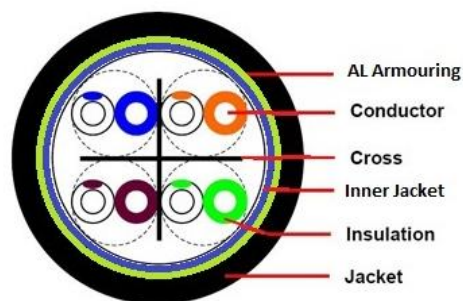

Construction:

Conductor	<i>Solid Bare Electrolytic Grade Copper</i>
Nominal Conductor Diameter	<i>(23 AWG) 0.550 ± 0.015</i>
Insulation	<i>Polyethylene</i>
Color Code:	
Pair #1	<i>Orange-White with Orange</i>
Pair #2	<i>Brown-White with Brown</i>
Pair #3	<i>Blue-White with Blue</i>
Pair #4	<i>Green-White with Green</i>
Rip Cord	<i>Yes</i>
Inner Jacket	<i>PVC</i>
Thickness of Inner Jacket	<i>0.65 to 0.70 mm</i>
Armouring	<i>Aluminium Wire</i>
Size of Wire	<i>0.80mm</i>
Sequential Marking	<i>At Every Meter</i>
TEMPRATURE RATING	<i>-20 TO +60 DEGREES C</i>
Outer Jacket	<i>PVC</i>
Thickness of Outer Jacket	<i>0.85 mm (Nom.)</i>
Colour of Jacket	<i>Black</i>
Approximate OD(approx)	<i>9.50 mm</i>
Filler	<i>HDPE</i>

LOW FREQUENCY ELECTRICAL PARAMETER

CONDUCTOR RESISTANCE (DC): 93.5 OHMS/1000MTR@20 Degree C. MAX.

RESISTANCE UNBALANCE : 5%MAX

MUTUAL CAPACITANCE: 5.6 nF/100 mtrs Max.

CAPACITANCE UNBALANCE PAIR/GROUND: 330PF/100M MAX

Propagation Delay Skew: 536 nS/100M

Normal Velocity of Propagation: 69%

IMPEDANCE: 100±15%OHMS

Worst Case cable skew : 45ns/100m

Generally confirming to EIA/TIA 568-C.2 and IEC/ISO 11801

HIGH FREQUENCY ELECTRICAL PARAMETER

FREQ	ATT (dB/ 100m) max.	NEXT (dB) min.	PS.NEXT (dB) min.	ACRF (dB @ 100 m) min.	PS.ACRF (dB @ 100 m) min	Return Loss
(MHz)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)
1	2.1	65	62	63	60.3	19
4	4	63	60.5	51.2	48.2	19
8	5.7	58.2	55.6	45.2	42.2	19
10	6.3	56.6	54	43.3	40.3	19
16	8	53.2	50.6	39.2	36.2	18
20	9	51.6	49	37.2	34.2	17.5
25	10.1	50	47.3	35.3	32.3	17
31.25	11.4	48.4	45.7	33.4	30.4	16.5
62.5	16.5	43.4	40.6	27.3	24.3	14
100	21.3	39.9	37.1	23.3	20.3	12
200	31.5	34.8	31.9	17.2	14.2	9
250	35.9	33.1	30.2	15.3	12.3	8

Ordering Information

NCB-C6UBLKR-305-A	Cat6 23AWG Twisted Pair Armored Cable – 305M
-------------------	--

D-Link (India) Limited

Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059

Specifications are subject to change without notice.

D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.

All other trademarks belong to their respective owners.

©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)