



PRIMUS

SELF DRILLING SCREW



About Us:

PRIMUS: - Chintamani Parshwanah Corporation has emerged as a pioneer of self drilling screw in India. Designed as per German Head Philips screw and made in Taiwan and China.

Our Brand has received appreciation from leading construction companies, warehousing companies and screw traders.

Primus deals in all types of self drilling screw.

Quality Control:-

Quality is our Prime Moto.



Consult a professional and discover the difference between Primus and other self drilling Screw in Market.

·100% Rust & Moisture Proof with EPDM Washer Made in Australia.

Technical

Specification of Screw :-

Carbon Steel 1022 Grade
Standard - DIN 7504 K

Principal Design Features:-

1022 steel is a slightly higher carbon and manganese content plain carbon steel than 1020. It is used for its somewhat greater strength while still having good ductility.

Applications:-

1022 steel is typically used for moderate strength structural applications such as cold formed fasteners and bolts. It is often used in the case hardened condition

Machinability:-

Machinability of 1022 steel is quite good, rating a 70% against the standard 1112 steel of 100% Machinability.

Forming:-

1022 steel has good ductility and is readily formed by conventional means.

Welding:-

Weldable by all standard methods. However for heavy sections the use of pre-heat and post- heat is advised.

Heat Treatment:-

1022 may be hardened by heating to 1500 - 1600 F and water quenching. The product should then be tempered. However for a low carbon steel such as this the improvement in strength from heat treat, quench and temper often are not cost effective in terms of the heat treating cost.

Product Range and Packaging Details :-

Drilling Capacity upto 12mm with Hi-Tech long Drill.

Hex Flange Full Thread Zinc Coated

SCREW SIZE	DRILLING POINT NO	PACKAGING (PER BOX/CARTON)
4.8 x 19mm	# 2	700*10 = 7000
5.5 x 25mm	# 4	600*10 = 6000
5.5 x 35mm	# 4	500*10 = 5000
5.5 x 45mm	# 4	400*10 = 4000
5.5 x 55mm	# 4	250*10 = 2500
5.5 x 68mm	# 4	200*10 = 2000



Hex Flange Double Thread - Zinc Coated

SCREW SIZE	DRILLING POINT NO	PACKAGING (PER BOX/CARTON)
5.5 x 55mm	# 4	250*10 = 2500



Hex Flange Double Thread - Dacromate Coated (Aluminium+Zinc)

SCREW SIZE	DRILLING POINT NO	PACKAGING (PER BOX/CARTON)
5.5 x 55mm	# 4	250*10 = 2500











Hex Flange Double Thread - Electropolysal Coated (Grey)

SCREW SIZE	DRILLING POINT NO	PACKAGING (PER BOX/CARTON)
5.5 x 55mm	# 4	250*10 = 2500



Applications:-

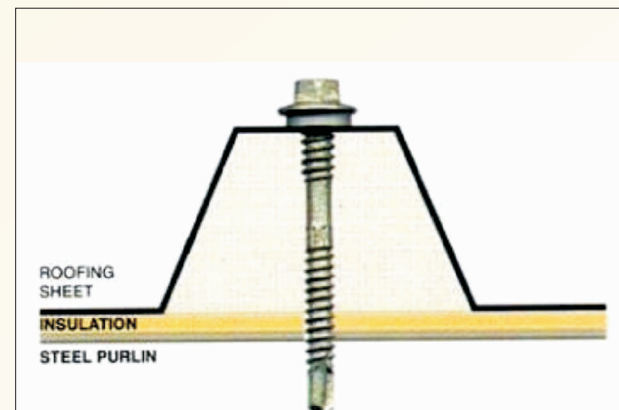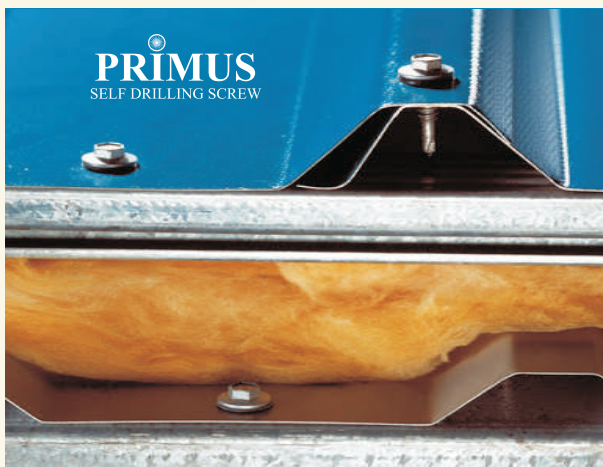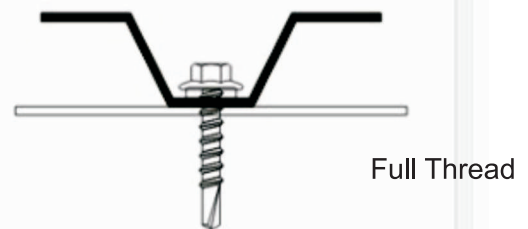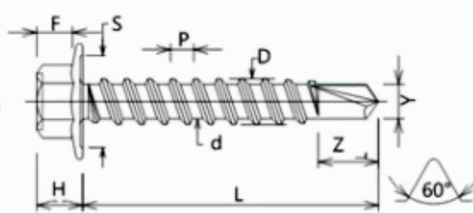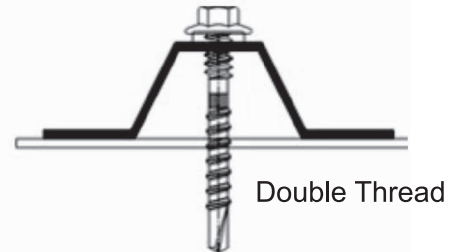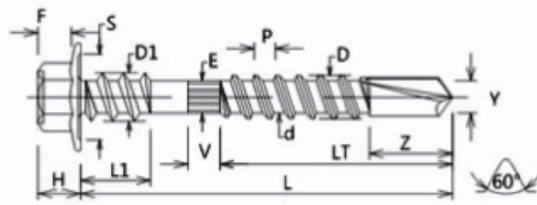

Application Example

