

SUNBOND Features

SUNBOND® Aluminium Composite Panel makes a better substitute for conventional building materials such as Marble, Granite, Tiles and Wood etc.



Lightweight and Rigid

The excellent ratio of strength/rigidity to weight is superior to solid aluminium and steel. Given the same bending resistance, the weight is approx. 40% less than aluminium sheets and yet the form is structurally more stable. Being light in weight, it is easy to carry, simple to form and of an effective cost.



Weather Proof

SUNBOND panels are weather-proof and have good UV resistance. SUNBOND panels are unaffected in salty, sand, coastal or dusty atmosphere.



Excellent Flatness

The three high techniques provide smooth and excellent flatness to SUNBOND panels eliminating distortion or deflection.



Versatility

SUNBOND® can be bent, cut, drilled, punched and easily shaped to achieve complex designs by using standard wood and metal working tools.



High Impact Resistance, Strong, Durable

The unique composite construction of strong aluminium skins firmly bonded to visco elastic core provides high impact, blow, vibration and breakage resistance. SUNBOND Panels are strong and last longer.



Color Uniformity

The new Roll colour coating system, which is applied to SUNBOND Aluminium Coils provides the best colour uniformity and consistency of high quality.



Reduced Dead Weight

SUNBOND® reduces the dead weight of the building. Being very light and strong it weighs less than 1/10th of conventional cladding materials such as marble, granite, concrete etc. SUNBOND® makes the building safer and strong from the danger of earthquake.



Easy Quick Installation

Being light in weight SUNBOND® is easily and quickly installed saving time and costs.



Sound and Thermal Resistance

SUNBOND® provides an excellent sound-proof effect. The laminated polyethylene core does not allow heat to penetrate in the buildings, as it is one of the best insulating materials and, thus, saves on air conditioning and energy costs.



Fire Resistant

SUNBOND® meets fire code requirements because of its non-combustible PE core. It does not emit toxic gases.



Water, Chemical and Corrosion Resistance



Maintenance Free



Sound and Thermal Resistance

SUNBOND® provides an excellent sound-proof effect. The laminated polyethylene core does not allow heat to penetrate in the buildings, as it is one of the best insulating materials and, thus, saves on air conditioning and energy costs.



Fire Resistant

SUNBOND® meets fire code requirements because of its non-combustible PE core. It does not emit toxic gases.



Water, Chemical and Corrosion Resistance

The high quality PVDF resin ensures extra resistance against corrosion, chalking, and colour fading. It protects from dampness, seepage, algae, fungus, dirt and cracks.



Maintenance Free

No maintenance is required. Annual cleaning with mild detergent is enough to keep the surface shining as ever.



Environment Friendly

It is totally recyclable and reusable in the production cycle and leaves no harmful effect on the environment. It replaces wood and saves forests.



Attractive Color

The availability of a wide range of attractive colours and elegant patterns enhances the beauty of the buildings.

Available Color

SUNBOND® is available in 36 nos. standard RAL Colours. The top surface is coated with high quality PVDF (Becker/PPG) (min70%) or Polyester. Custom colours are available on request (see our colour chart).

Protective surface

The coated top surface is during manufacturing with protective film to with stand minimum six month exposure to local weather conditions without losing peel-off characteristics or causing strains or any other damage during transport, storage and installation.

Available Color


SUNBOND® is available in 36 nos. standard RAL Colours. The top surface is coated with high quality PVDF (Becken/PPG) (min70%) or Polyester. Custom colours are available on request (see our colour chart).

Protective surface

The coated top surface is during manufacturing with protective film to with stand minimum six month exposure to local weather conditions without losing peel-off characteristics or causing strains or any other damage during transport, storage and installation.

DESCRIPTION	UNIT	SUNBOND		
		3 mm	4 mm	5mm
Weight of panel	kg / m ²	4,50	5,50	7,30
Destiny	g/m ²	1,52	1,37	1,22
Modulus of Elasticity (of aluminium substrate)	N/cm ²	6,9x10 ⁴	6,9x10 ⁴	6,9x10 ⁴
Moment of Inertia	cm ⁴ /m	0,180	0,345	0,850
Rigidity	kN. m ² / m	1260	2410	5950
Tensile Strength	N / mm ²	130	130	130
Permissible Bending Stress	N/mm ²	53	53	53
Section Modulus	cm ³ / m	1,25	1,25	1,25
Thermal Linear expansion	mm/ m . °C	0,024	0,024	0,024
Elongation (of aluminium substrate)	%	5,2	5,2	5,2
Average airborne sound	>dB	24	26	27
Average sound absorption factor		0,05	0,05	0,05
Average vibration loss factor for 200 Hz frequency		0,0071	0,0081	0,0137

Processing Methods

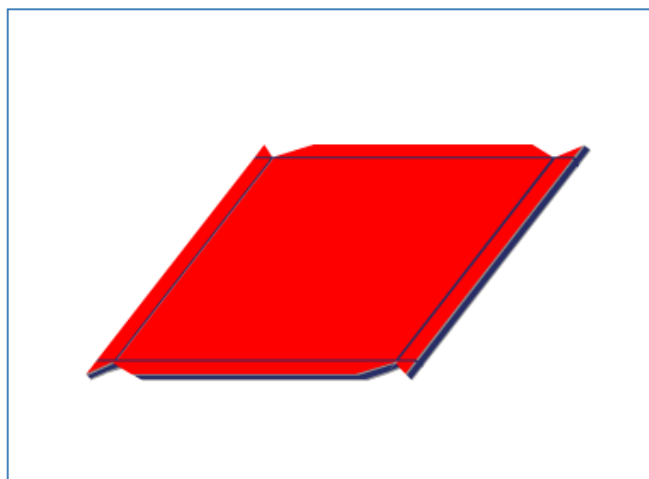

Saw cutting, Shear cutting, Grooving, Punching, Perforating and Drilling are available.

Grooving

SUNBOND® can be folded easily after grooving on the back skin using router, trimmer or circular saw equipped with a grooving cutter.

Bending or Curving


SUNBOND® can be easily cold bent with press brake or a three-roll bender.

Joining and Adhesion

It is convenient to use aluminium or stainless steel rivets, bolts and/or screws and several adhesives and both sided adhesive tapes in order to join SUNBOND® with different kind of metals.

SUNBOND® Installation:

To avoid possible reflection differences for Metallic Colours, it is recommended that panels be installed in the same direction – i.e. with the orientation of the marking shown on the protective film of the individual panels running parallel to each other.

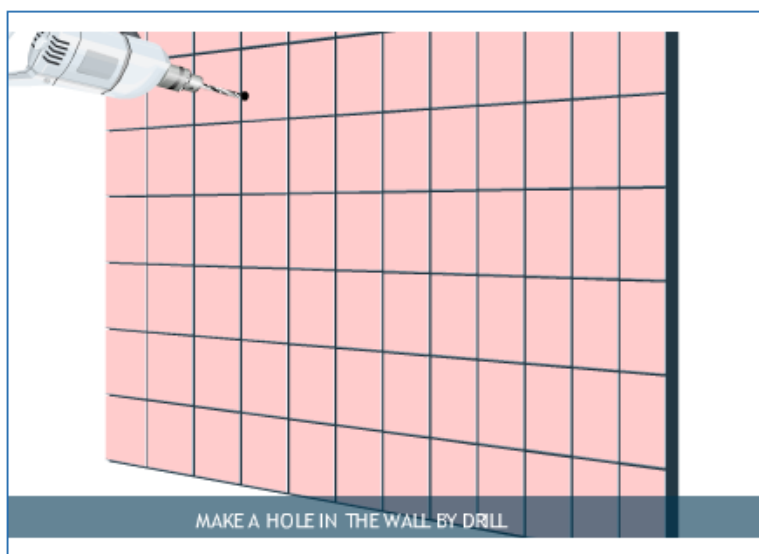

True



True



False



False

Advantages of SUNBOND™ Compared to Other Panels

SUNBOND™ Aluminium Composite Panel makes a perfect substitute for conventional building materials such as marble, granite, tiles, concrete and wood etc.



ITEM	SUNBOND® PANELS:	OTHER PANELS:
PVDF Coating	Superior Quality PVDF used in Two & Three Layer coatings in min. 25-32 microns.	Ordinary, Non-standard PVDF coated in 15-20 microns, not suitable in European climate.
PE-Core & Adhesive Film	PE Core and Adhesive Film is 100% virgin quality,thereby ensures strong bonding and insulation properties in the panel.	PE Core and Adhesive Film is substandard & recyc-led, dangers the bonding & insulation properties of panel.
Flatness	Three roller advanced technology provides excellent flatness.	Bending occurs on surface & extra machining required.
Availability	Manufactured in India, easily available	Imported from different sources, thus the lead time for delivery is always uncertain.
Colour, Ranges & Shade Variation	Available in 36 standard RAL COLOURS to meet all colour combination requirements. No any shade variation.	Only limited few colours are available. Imported from different sources, hence shade variation is bound to occur
Sizes	Can be ordered in any cut-to-size, thus eliminating wastage and reducing the cost of projects.	Only available in standard sizes, causing lot of wastage and increase in project cost heavily.
Width	Available in 1220, 1500, 1550, 1575 & 1600mm width.	Available only in one width of 1220mm.
Length	Available in any length upto 6000mm or more.	Available upto maximum 3800mm.
Thickness	Available in all thickness of 1,2,3,4,5, & 6mmfor multiple and convenient applications.	Available only in limited thickness.
PU Coating	Bottom Aluminium surface is polyester coated, hence ensures the durability and stability.	No polyester coating on bottom surface.

SUNBOND Dimensions


Standard Width	1220 mm
Available Widths	1220, 1500, 1550, 1575 a 1600 mm
Standard Length	2440, 3100, 3660 mm
Available Lengths	do 6000 mm
Available Panel Thickness	1, 2, 3, 4, 5 a 6 mm
(Special thickness, colours and sizes available on request)	

Panel Thicknes	Top Aluminium	PE Core	Bottom Aluminium	Coating
6 mm	0.5 mm	5.0 mm	0.5 mm	PVDF
5 mm	0.5 mm	4.0 mm	0.5 mm	PVDF
4 mm	0.5 mm	3.0 mm	0.5 mm	PVDF
4 mm	0.4 mm	3.2 mm	0.4 mm	PVDF
4 mm	0.3 mm	3.4 mm	0.3 mm	PVDF
3 mm	0.3 mm	2.4 mm	0.3 mm	PVDF
3 mm	0.25 mm	2.50 mm	0.25 mm	PVDF
3 mm	0.25 mm	2.50 mm	0.25 mm	Polyester
3 mm	0.21 mm	2.58 mm	0.21 mm	PVDF
3 mm	0.21 mm	2.58 mm	0.21 mm	Polyester
2 mm	0.15 mm	1.70 mm	0.15 mm	Polyester
1 mm	0.10 mm	0.80 mm	0.10 mm	Polyester


Sunbond Available Colours

SUNBOND™ is available coated with high quality PVDF resin (min70%)or Polyester coating in standard RAL colors(30 colors). Custom colors are available on request as per our color chart.


SUNBOND™ aluminium panels are used in office complexes, shopping malls, banks, hotels & restaurants, studio, exhibition centers, industrial buildings, super markets, passenger terminals, highway toll posts, petrol stations, railway/metro stations, airports, tunnels etc.

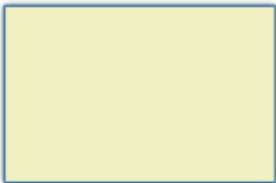


APRICOT SB109

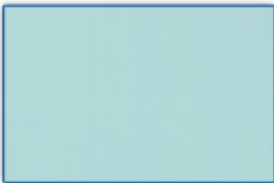


BLUE GREY SB203

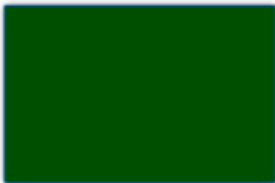

BOTTLE GREEN SB318




BRIGHT SILVER SB101




CHAMPAGNE GOLD SB 104




BRUSH SILVER SBB210



BRUSH GOLD SBB211



BRONZE SB114



CHAMPAGNE SILVER SB103




CHINA RED SB208



CHROMIUM YELLOW SB205



DARK GREEN SB303



DEEP GREY SB306



BEEP ROSE SB212




DEEP BLUE SB309




FINLAND GREEN SB301




GRASS GREEN SB302



IVORY WHITE SB106



JADE GREEN SB110




LAKE BLUE SB307



LIGHT BLUE SB308




LIGHT GREEN SB311



LIGHT GREY SB202




LIGHT PINK SB201



METALLIC SILVER SB102



ORANGE SB201



PALM COPPER SB112




PEARL BLACK SB209



POST GREEN SB304



PURE WHITE SB105



RICH GOLD SB111




ROYAL RED SB207



SNOW BLUE SB305



VIOLET SB310



YELLOW WHITE SB108



YELLOW SB206

Applications



- Ideal for interiors & exteriors.
- New constructions and renovations.
- Unlimited applications in commercial, Industrial and entertainment industries.
- Building Facade, Display units, Sign boards, Column Covers, Beam and Pillar Covers, Room Dividers, Ceilings & more...
- Replaces traditional/wooden laminates for Cabinets, Doors and Partitions.
- Airports, Exhibition Halls, Hotels, Healthcare Facilities, Multiplexes, Petrol Pumps, Shopping Malls, Banks, Showrooms, Institutions, Auto Dealers, Railway/Metro Stations & more...

Technology



Testing Equipments



Structure of SUNBOND™

SUNBOND™ available coated with high quality PVDF resin (min70%)or Polyester coating in standard RAL colors(30 colors). Custom colors are available on request as per our color chart.

