

# AN13303 SNxxx/PN557- NFC Host SW Integration Guideline

Rev. 1.0 — 12/16/2022

Application Note

## Document information

Info	Content
Keywords	NFC, Android

**Revision history**

Rev	Date	Description
1.0	2022-12-16	Initial version for Android 14 NXP NFC Host SW Integration Guide

## 1. Introduction

NXP's NFC controller SNxxxT/U and PN557 are designed to work with Android open source. Fig. 1 for SN1xx , Fig. 2 for SN220 and Fig 3 for PN557 shows the NXP's development and validation platform setup with Hi-key board 960.

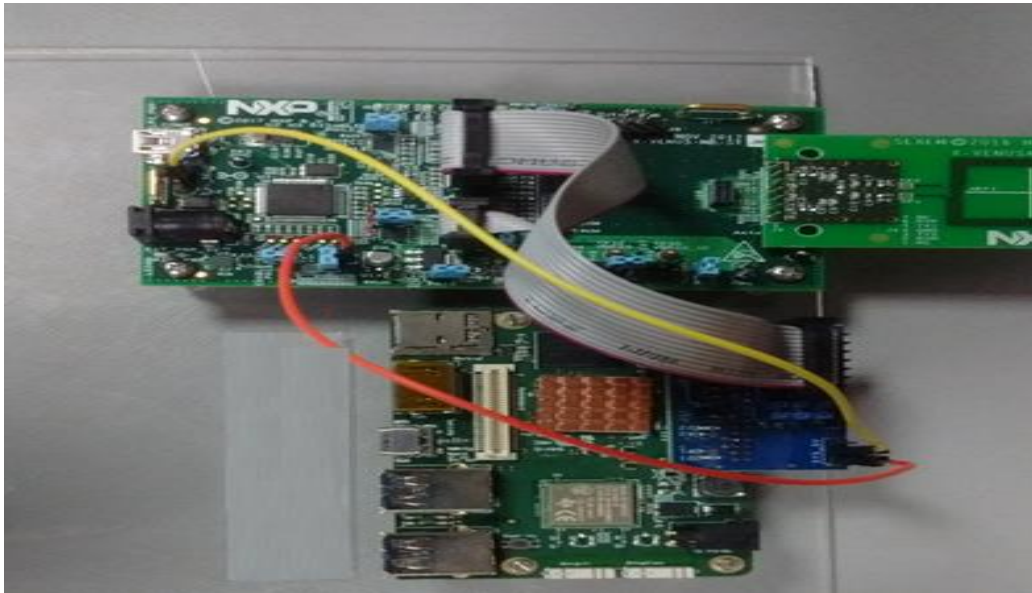


Figure 1: Hikey960 with SN1xx and Iguana Lite Board

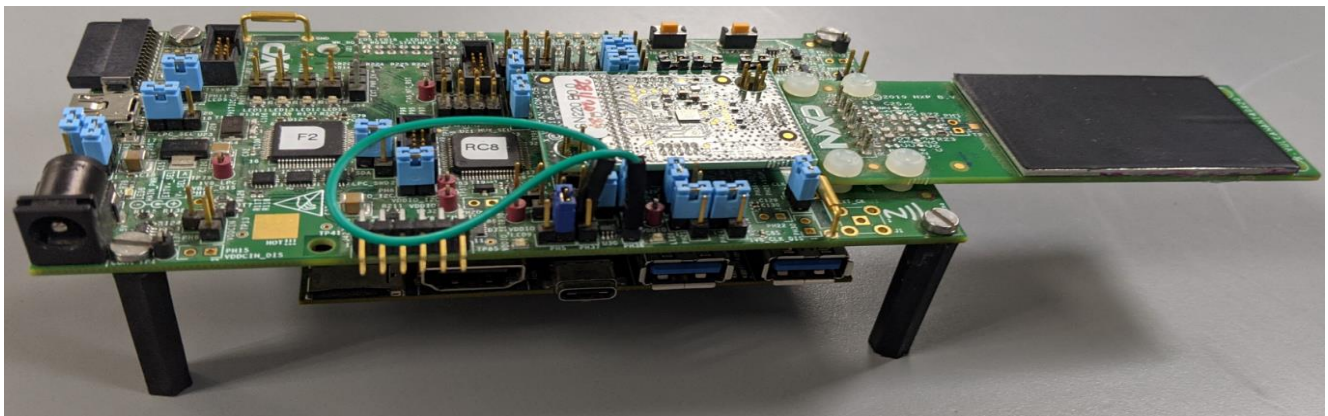


Figure 2: Hikey960 with SN220 and Komodo Board



**Figure 3: Hikey960 along with PN557 Daughter sandwich board**

## 2. Abbreviations

---

NFC	Near Field Communication
OEM	Original Equipment Manufacturer
HW	Hardware
IC	Integrated Circuit
SWP	Single Wire Protocol
GPIO	General Purpose Input / Output
I2C	Inter-Integrated Circuit
SPI	Serial Peripheral Interface
SW	Software
SE	Secure Element
OMAPI	Open Mobile Application Programming Interface
AOSP	Android Open Source Project
HAL	Hardware Abstraction Layer
eSE	Embedded Secure Element
OS	Operating System
SEMS	Secure Element Management Service
LS	Loader Service
GSMA	GSM Association
GSM	Global System for Mobile
NFCC	NFC Controller
SMB	System Mail Box
HIDL	HAL interface definition language
UICC	Universal Integrated Circuit Card
ISO	International Organization for Standardization
P2P	Peer To Peer
DH	Device Host
DTA	Device Test Application
NA	Not Applicable
MPOS	Mobile Point of Sale
TEE	Trusted Execution Environment

### 3. Scope

---

This document provides guidelines for setting up NXP's new generation NFC/SE monolithic platform SN<sub>xxx</sub>T/U and NFC only PN557 in Android 14 build environment. It is a reference guideline for basic system integration. OEM integration may have variations based on actual system integration.

## 4. General steps for Android NFC integration

For the NFC software integration with Android, it is hereby assumed that NFC IC HW integration is done in a platform with following checks.

- Schematic reviewed with NXP
- HW IC interface like I2C/SPI, SWP (if used) working.
- Antenna designed and reviewed
- Antenna connection working
- GPIO connections checked

Fig. 4, shows the basic flow for Android NFC SW bring up. Following sections describe these steps in detail.

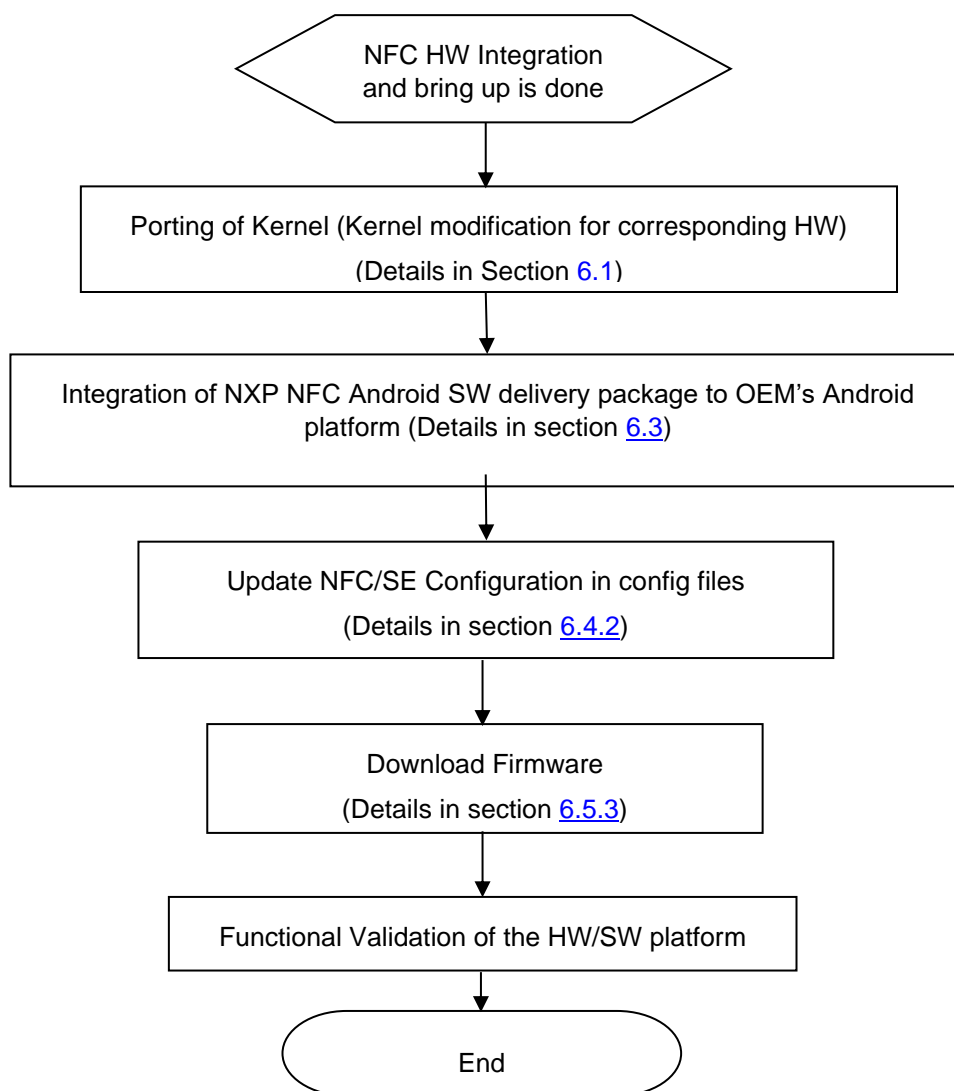


Figure 4: Android NFC SW bring up flow

## 5. Architecture Overview

Fig. 5, describes the architecture of Android 12 based NXP delivery package.

OMAPI implementation is part of the AOSP from Android P version onwards and NXP does not make any modification in Android OMAPI service layer.

**Note: SEHal, WeaverHal, KeyMaster/KeyMint Hal, AuthSecret HAL and SPIDriver are not applicable and shall not be integrated for NFC only product PN557.**

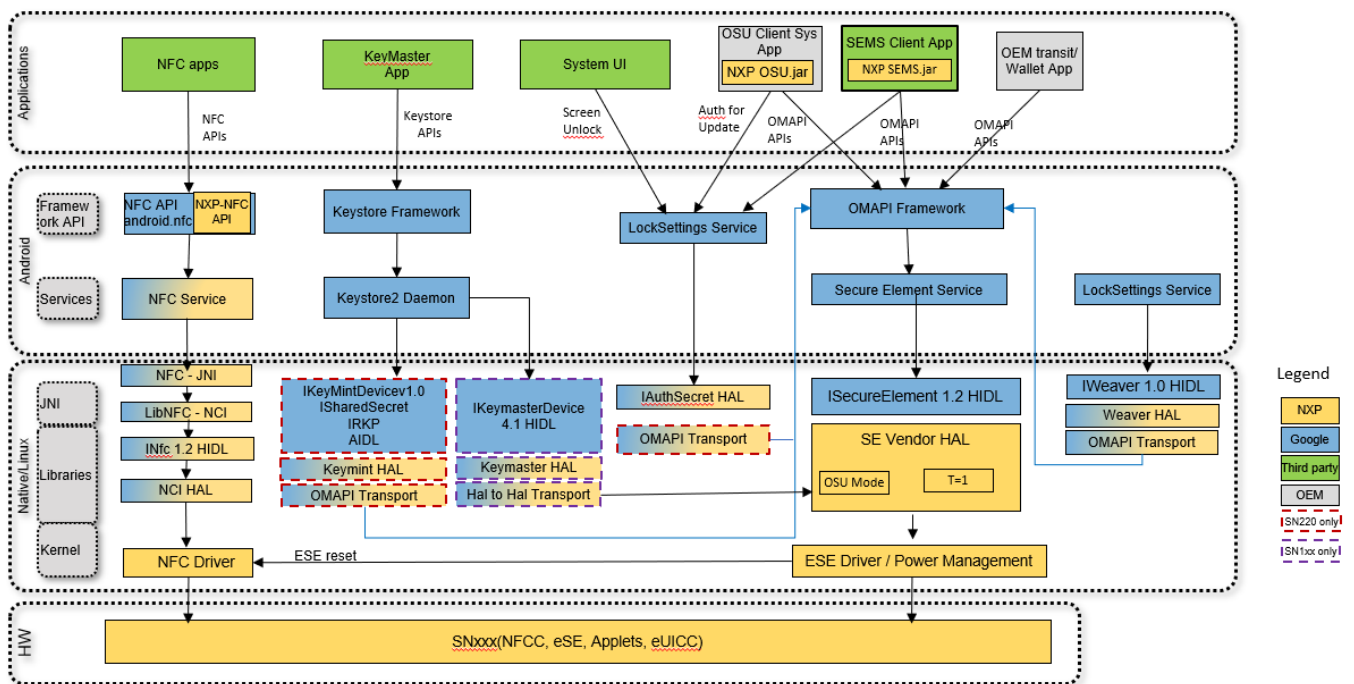


Figure 5: Secure NFC MW architecture



## 6. Setup of Android NFC

### 6.1 Android Kernel driver setup for NXP-NFCC and eSE

#### 6.1.1 SNxxx

The hikey platform kernel can be downloaded by the below command:

```
repo init -u https://android.googlesource.com/kernel/manifest -b common-android13-5.10
repo sync -j8
```

Additional information regarding hikey kernel:

git branch: android13-5.10

git commit: 5d08df939912da2625e60bde1dce463355760e2b

Steps to perform in platform's kernel root directory to integrate NXP specific I2C and SPI drivers for accessing NFCC and eSE.

1. Download NFC I2C & SPI drivers from below git hub location:  
[https://github.com/NXPnfcProject/NXPnfc\\_I2CDriver](https://github.com/NXPnfcProject/NXPnfc_I2CDriver)  
[https://github.com/NXPnfcProject/NXPese\\_SPIDriver](https://github.com/NXPnfcProject/NXPese_SPIDriver)
2. Create nxp folder inside common/drivers/
3. Copy nfc from NXPnfc\_I2CDriver and keep inside common/driver/nxp
4. Copy ese from NXPnfc\_SPIDriver to common/driver/nxp
5. Include the driver Makefile folder path in the higher level Makefile in hierarchy
6. Include the Kconfig source to the higher level Kconfig in hierarchy
7. Add the DTS changes required in your platform DTS file

```
clock-frequency = <1000000>;
sn-i2c@28 {
    compatible = "nxp,sn-nci";
    reg = <0x28>;
    nxp,sn-irq = <&gpio26 0 0>;
    nxp,sn-ven-rstn = <&gpio26 1 0>;
    nxp,sn-dwl-req = <&gpio26 2 0>;
};
p61@0 {
    compatible = "nxp,p61";
    reg = <0>;
    nxp,p61-irq = <&gpio2 3 0>;
    nxp,p61-rst = <&gpio2 5 0>;
    nxp,trusted-se = <&gpio26 4 0>;
    spi-max-frequency = <20000000>;
    nxp,nfcc = "2-0028";    };
```

8. Set the kernel configuration to build driver as static or dynamic in the platform config file
  - a. Static Linking with kernel image  
CONFIG\_NXP\_NFC\_I2C=y  
CONFIG\_NXP\_ESE\_P73=y
  - b. Dynamic as module(.ko)  
CONFIG\_NXP\_NFC\_I2C=m  
CONFIG\_NXP\_ESE\_P73=m
9. Compile the kernel using corresponding cross compiler and copy the generated Image.gz-dtb file to the ANDROID\_ROOT/device/vendor/platform-kernel

*Note: It is recommended to apply the patches manually.*

*Steps 2-6 are only required for building driver in-tree during building kernel.*

### 6.1.2 PN557

The hikey platform kernel can be downloaded by the below command:

```
repo init -u https://android.googlesource.com/kernel/manifest -b common-android13-5.10
repo sync -j8
```

Additional information regarding hikey kernel:

git branch: android13-5.10

git commit: 5d08df939912da2625e60bde1dce463355760e2b

Steps to perform in platform's kernel root directory to integrate NXP specific I2C driver for accessing NFCC

1. Download NFC I2C driver from below git hub location:  
[https://github.com/NXPnfcProject/NXPnfc\\_I2CDriver](https://github.com/NXPnfcProject/NXPnfc_I2CDriver)
2. Create nxp folder inside kernel/driver/
3. Copy nfc from NXPnfc\_I2CDriver and keep inside kernel/driver/nxp
4. Include the driver Makefile folder path in the higher level Makefile in hierarchy
5. Include the Kconfig source to the higher level Kconfig in hierarchy
6. Add the DTS changes required in your platform DTS file  
ldo11: LDO11 { /\* Low Speed Connector \*/  
 regulator-name = "VOUT11\_1V8\_2V95";  
 regulator-min-microvolt = <1825000>;  
 regulator-always-on;  
 regulator-enable-ramp-delay = <240>;

```
};
clock-frequency = <1000000>;
sn-i2c@28 {
    compatible = "nxp,sn-nci";
    reg = <0x28>;
    nxp,sn-irq = <&gpio26 0 0>;
    nxp,sn-ven-rstn = <&gpio26 1 0>;
    nxp,sn-dwl-req = <&gpio26 2 0>;
};
```

7. Set the kernel configuration to build driver as dynamic in the platform config file  
CONFIG\_NXP\_NFC\_I2C=m
8. Compile the kernel using corresponding cross compiler and copy the generated Image.gz-dtb file to the ANDROID\_ROOT/device/vendor/platform-kernel

## 6.2 Setup of Android NFC for Hikey

### 6.2.1 Downloading Android source code

Use following command to get source code for Android-<x>.<y>:

```
repo init -u https://android.googlesource.com/platform/manifest -b android-<x>.<y>
```

```
repo sync -f
```

*Note: x & y represents Android major & minor versions*

For detailed steps to download Android source code refer Android website:

<http://source.android.com/source/downloading.html>

### 6.2.2 Building the source code

Use android build instructions from Android website for building android OS image:

<http://source.android.com/source/building.html>

Build name for Hikey development board is **hikey960**. For device specific build (e.g. Hikey), additional steps as described in link below needs to be followed.

<https://source.android.com/setup/build/running>

Information about the public APIs supported by Android NFC are available on following links:

<http://developer.android.com/reference/android/nfc/package-summary.html>

<http://developer.android.com/reference/android/nfc/tech/package-summary.html>

### 6.2.3 Building driver out of kernel tree(for arm64 arch)

Following are the steps to build the NFCC and ESE driver out-of-tree with the ACK, validated with the launch kernel android13-5.10 for A14.

1. Follow the steps mentioned in 6.1 for kernel sync & NXP NFC/SE driver integration.
2. Run below command for kernel out of tree compilation according to target platform. command mentioned in a. is for hikey960 & command mentioned in b. is for db845c.

a. BUILD\_NUMBER= BUILD\_CONFIG=common/build.config.hikey960 ./build/build.sh -j\$(nproc)

b. BUILD\_NUMBER= BUILD\_CONFIG=common/build.config.db845c ./build/build.sh -j\$(nproc)

SKIP\_MRPROPER=1 SKIP\_CP\_KERNEL\_HDR=1 are optional parameters to optimize the kernel build time during incremental build.

3. Build binaries will be available in KROOT/out/android13-5.10/dist folder. Create Image.gz-dtb by concatenate Image.gz & dtb file.

**Example:** cat Image.gz hi3660-hikey960.dtb > Image.gz-dtb

4. Copy the generated ko files & Image.gz-dtb to the android build environment for example "device/linaro/hikey-kernel/hikey960/5.10/" for hikey960.

## 6.3 Android NXP NFC SW Delivery Package

### 6.3.1 Android NXP NFC Package Description

Project/Repository	Repository Link	Branch
NFC_NCIHAL_base	<a href="https://github.com/NXPnfcProject/NFC_NCIHAL_base">https://github.com/NXPnfcProject/NFC_NCIHAL_base</a>	br_android_ncihalx_comm_14
NFC_NCIHAL_Nfc	<a href="https://github.com/NXPnfcProject/NFC_NCIHAL_Nfc">https://github.com/NXPnfcProject/NFC_NCIHAL_Nfc</a>	br_android_ncihalx_comm_14
NFC_NCIHAL_libnfc-nci	<a href="https://github.com/NXPnfcProject/NFC_NCIHAL_libnfc-nci">https://github.com/NXPnfcProject/NFC_NCIHAL_libnfc-nci</a>	br_android_ncihalx_comm_14
nfcandroid_nfc_hidlimpl	<a href="https://github.com/NXPnfcProject/nfcandroid_nfc_hidlimpl">https://github.com/NXPnfcProject/nfcandroid_nfc_hidlimpl</a>	br_android_ncihalx_comm_14

nfcandroid_se_hidlimpl	<a href="https://github.com/NXPNFCProject/nfcandroid_se_hidlimpl">https://github.com/NXPNFCProject/nfcandroid_se_hidlimpl</a>	br_android_ncihalx_comm_14
nfcandroid_secureelement	<a href="https://github.com/NXPNFCProject/nfcandroid_secureelement">https://github.com/NXPNFCProject/nfcandroid_secureelement</a>	br_android_ncihalx_comm_14
nfcandroid_weaver_hidlimpl	<a href="https://github.com/NXPNFCProject/nfcandroid_weaver_hidlimpl">https://github.com/NXPNFCProject/nfcandroid_weaver_hidlimpl</a>	br_android_ncihalx_comm_14
nfcandroid_keymaster_hidlimpl	<a href="https://github.com/NXPNFCProject/nfcandroid_keymaster_hidlimpl">https://github.com/NXPNFCProject/nfcandroid_keymaster_hidlimpl</a>	br_android_ncihalx_comm_14
nfcandroid_keymint_hidlimpl	<a href="https://github.com/NXPNFCProject/nfcandroid_keymint_hidlimpl">https://github.com/NXPNFCProject/nfcandroid_keymint_hidlimpl</a>	br_android_ncihalx_comm_14
nfcandroid_nxp_ese_clients	<a href="https://github.com/NXPNFCProject/nfcandroid_nxp_ese_clients">https://github.com/NXPNFCProject/nfcandroid_nxp_ese_clients</a>	br_android_ncihalx_comm_14
NXPNFC_Reference	<a href="https://github.com/NXPNFCProject/NXPNFC_Reference">https://github.com/NXPNFCProject/NXPNFC_Reference</a>	br_android_ncihalx_comm_14
NXPNFC_I2CDriver	<a href="https://github.com/NXPNFCProject/NXPNFC_I2CDriver">https://github.com/NXPNFCProject/NXPNFC_I2CDriver</a>	br_android_ncihalx_comm_14
NXPESE_SPIDriver	<a href="https://github.com/NXPNFCProject/NXPESE_SPIDriver">https://github.com/NXPNFCProject/NXPESE_SPIDriver</a>	br_android_ncihalx_comm_14
NFC_NCIHAL_docs	<a href="https://github.com/NXPNFCProject/NFC_NCIHAL_docs">https://github.com/NXPNFCProject/NFC_NCIHAL_docs</a>	br_android_ncihalx_comm_14
nfc-NXPNFCC_FW	<a href="https://github.com/NXP/nfc-NXPNFCC_FW">https://github.com/NXP/nfc-NXPNFCC_FW</a>	master
NXPAndroidDTA	<a href="https://github.com/NXPNFCProject/NXPAndroidDTA">https://github.com/NXPNFCProject/NXPAndroidDTA</a>	master
nfcandroid_frameworks	<a href="https://github.com/NXPNFCProject/nfcandroid_frameworks.git">https://github.com/NXPNFCProject/nfcandroid_frameworks.git</a>	br_android_ncihalx_comm_14

Table 1: Android NXP NFC Package Description

### 6.3.2 Integration of NXP NFC Modules for SNxxx & PN557

Modify/Add AOSP directories in-place with NXP GitHub sources as per the following table:

Module	NXP GitHub sources	Integration Path	Description	Applicable Chip type
NFC Interface and Public APIs	NFC_NCIHAL_base /core/java/ android/nfc	\$ANDROID_ROOT/frameworks/ base/core/ java/android/nfc	NFC Interfaces & Public APIs for Google AOSP	SNxxx & PN557
NFC JNI and JAVA implementation of NCI stack	NFC_NCIHAL_Nfc /nci	\$ANDROID_ROOT/packages/ apps/Nfc/nci	Includes Java files and JNI for NCI NFC stack. It is modified minimally to adapt new features provided by NXP.	SNxxx & PN557
	NFC_NCIHAL_Nfc /nci/jni/ extns/pn54x	#ANDROID_ROOT/packages/ apps/Nfc/nci/jni/ extns/pn54x	It is an implementation of extension features developed by NXP. E.g. Mifare classic support	SNxxx & PN557

	<i>NFC_NCIHAL_Nfc</i>	\$ANDROID_ROOT/packages/apps/Nfc [Remaining parts]	It is a derived module originally from AOSP. It is modified minimally to adapt new features provided by NXP.	SNxxx & PN557
NCI based NFC stack implementation	<i>NFC_NCIHAL_libnfc-nci</i>	\$ANDROID_ROOT/system/nfc	NCI based NFC stack.  It is a derived module originally from AOSP (Android Open Source Project). It is modified to adapt new features provided by NXP	SNxxx & PN557
HAL implementation for NFC	nfcandroid_nfc_hidlimpl	\$ANDROID_ROOT/hardware/nxp/nfc	Hardware abstraction layer for NXP specific controllers. This directory includes the configuration files also as below. 1.libnfc-nci.conf (to be pushed to vendor/etc on target) 2.libnfc-nxp-sn100x_example.conf (to be pushed to vendor/etc on target as libnfc-nxp.conf. 3.libnfc-nxp_RF-sn100x_example.conf(to be pushed to /vendor/ on target) NOTE: these configuration files are example files. Contact NXP support engineer for creating exact file for your platform.	SNxxx & PN557
HAL implementation for Secure Element	nfcandroid_se_hidlimpl	\$ANDROID_ROOT/hardware/nxp/secure_element	Hardware abstraction layer implementation for Secure Element.	SNxxx
HAL implementation for Weaver	nfcandroid_weaver_hidlimpl	\$ANDROID_ROOT/hardware/nxp/weaver	Hardware abstraction layer implementation for Weaver.	SNxxx
HAL implementation for keymaster	nfcandroid_keymaster_hidlimpl/keymaster	\$ANDROID_ROOT/hardware/nxp/keymaster	Hardware abstraction layer implementation for Keymaster.	SNxxx
HAL implementation for keymint	nfcandroid_keymint_hidlimpl	\$ANDROID_ROOT/hardware/nxp/keymint	Hardware abstraction layer implementation for Keymint	SNxxx
HAL implementation for authsecret	nfcandroid_keymint_hidlimpl/authsecret	\$ANDROID_ROOT/hardware/nxp/keymint/authsecret	Hardware abstraction layer implementation for authsecret	SNxxx
SE Service	nfcandroid_secureelement	\$ANDROID_ROOT/packages/apps/SecureElement	AOSP Secure Element Service	SNxxx
eSe Client Library	nfcandroid_nxp_ese_clients	\$ANDROID_ROOT/hardware/nxp/secure_element_extns	NXP eSE client library implementation	SNxxx
Vendor APIs	nfcandroid_frameworks	\$ANDROID_ROOT/vendor/nxp/frameworks	NXP vendor framework APIs for NXP extension interfaces, SEMS & GSMA interfaces.	SNxxx & PN557
NFC I2C Driver	NXPNFC_I2CDriver/nfc	\$KERNEL_ROOT/drivers/nxp/nfc	NFCC I2C Interface	SNxxx & PN557

NFC SPI Driver	NXPESE_SPIDriver/ese	\$KERNEL_ROOT/drivers/nxp/ese	NFCC SPI Interface	SNxxx
Nxp Nfc Documentation	NFC_NCIHAL_docs	NA	NXP framework Java Docs	SNxxx & PN557
NFCC Firmware	nfc-NXPNFCC_FW	\$ANDROID_ROOT/system/vendor/lib64	NFCC FW binary	SNxxx & PN557
DTA	NXPAndroidDTA	\$ANDROID_ROOT/system/nfc-dta/	Device Test Application (DTA) used for NFC Forum testing.	SNxxx & PN557
SePolicy	NXPNFC_Reference/ /nxp/SNxxx/sepolicy	\$ANDROID_ROOT//vendor/nxp/SNxxx/sepolicy	SE Policy updates for NFC and SE service	SNxxx & PN557

Table 2 : Android NXP NFC Integration

### 6.3.3 Android NFC Apps and Lib on Target

Projects	Compiled Files	Location in target device
NFCNCIHAL_base/core/java/android/nfc	Will be part of framework.jar	/system/framework
NFC_NCIHAL_Nfc	lib/ NfcNci.apk oat/ libnfc_nci_jni.so	/system/app/NfcNci  /system/lib64/
nfcandroid_secureelement	oat/ SecureElement.apk	/system/app/SecureElement
NFC_NCIHAL_libnfc-nci	libnfc_nci.so	/system/lib64
nfcandroid_nfc_hidimpl	nfc_nci_nxp_snxxx.so <a href="#">android.hardware.nfc_snxxx@1.2-service</a>	/vendor/lib64 /vendor/bin/hw/
nfcandroid_nfc_hidimpl/extns	<a href="#">vendor.nxp.nxpncf@2.0.so</a>	/system/lib64
nfcandroid_se_hidimpl	ese_spi_nxp_snxxx.so <a href="#">android.hardware.secure_element_snxxx@1.2-service</a>	/vendor/lib64 /vendor/bin/hw/
nfcandroid_se_hidimpl/extns	<a href="#">vendor.nxp.nxpese@1.0.so</a>	/system/lib64
nfcandroid_keymaster_hidimpl	libJavacardKeymaster41.so <a href="#">android.hardware.keymaster@4.1-javacard.service</a> libese_transport	/vendor/lib64 /vendor/bin/hw /vendor/lib64
nfcandroid_keymint_hidimpl	libjc_keymint.so libjc_keymint_transport.so android.hardware.security.keymint-service.strongbox android.hardware.authsecret-service.nxp	/vendor/lib64 /vendor/lib64 /vendor/bin/hw /vendor/bin/hw
nfcandroid_weaver_hidimpl	ese_weaver.so android.hardware.weaver@1.0-service	/vendor/lib64 /vendor/bin/hw
nfcandroid_nxp_ese_clients	se_extn_client.so ls_client.so	/vendor/lib64

	jcos_client.so	
Nfcandroid_frameworks	com.gsma.services.nfc.jar com.nxp.nfc.jar com.nxp.sems.jar	/system/framework /vendor/framework

Table 3 : Android NXP NFC Apps &amp; Library Info on Target

## 6.3.4 Android Platform Modifications

### 6.3.4.1 Android platform specific patches

Follow Step 1,2 & 3 to enable the following:

- Enable NFC, host card emulation and HCE-Felica features.
- Provide permission to i2c(nxp-nci) and spi(p73) driver for NFC Hal and SE Hal
- Assign object type for i2c(nxp-nci) and spi(p73) devices for providing se policy permissions
- Android SE Policy changes (these changes help in defining types, classes, permissions and rules for Nfc, SE, Strongbox & Weaver Hal service)
  1. Copy “nxp” folder in the below link to \$ANDROID\_ROOT/vendor  
[https://github.com/NXPnfcProject/NXPnfc\\_Reference/tree/br\\_android\\_ncihalx\\_comm\\_14/nxp](https://github.com/NXPnfcProject/NXPnfc_Reference/tree/br_android_ncihalx_comm_14/nxp)
  2. Apply below patch in ANDROID\_ROOT/device/linaro/hikey folder.  
[https://github.com/NXPnfcProject/NXPnfc\\_Reference/blob/br\\_android\\_ncihalx\\_comm\\_14/platform\\_patches/AROOT\\_device\\_linaro\\_hikey.patch](https://github.com/NXPnfcProject/NXPnfc_Reference/blob/br_android_ncihalx_comm_14/platform_patches/AROOT_device_linaro_hikey.patch)
  3. Apply all the patches from link below if strongbox is integrated  
[https://github.com/NXPnfcProject/NXPnfc\\_Reference/tree/br\\_android\\_ncihalx\\_comm\\_14/platform\\_patches/keymaster](https://github.com/NXPnfcProject/NXPnfc_Reference/tree/br_android_ncihalx_comm_14/platform_patches/keymaster)
  4. Integrate all required sepolicy. Reference SE policy changes are available in below link  
[https://github.com/NXPnfcProject/NXPnfc\\_Reference/tree/br\\_android\\_ncihalx\\_comm\\_14/nxp/SNxxx/sepolicy](https://github.com/NXPnfcProject/NXPnfc_Reference/tree/br_android_ncihalx_comm_14/nxp/SNxxx/sepolicy)

### 6.3.4.2 Android platform stability patches

Apply the below patch to avoid android platform stability(Hikey specific) issues

[https://github.com/NXPnfcProject/NXPnfc\\_Reference/blob/br\\_android\\_ncihalx\\_comm\\_14/platform\\_patches/AROOT\\_frameworks\\_base.patch](https://github.com/NXPnfcProject/NXPnfc_Reference/blob/br_android_ncihalx_comm_14/platform_patches/AROOT_frameworks_base.patch)  
[https://github.com/NXPnfcProject/NXPnfc\\_Reference/blob/br\\_android\\_ncihalx\\_comm\\_14/platform\\_patches/AROOT\\_frameworks\\_base.patch](https://github.com/NXPnfcProject/NXPnfc_Reference/blob/br_android_ncihalx_comm_14/platform_patches/AROOT_frameworks_base.patch)

### 6.3.4.3 Android Source Build

To perform a full build, execute the following command from android root directory:

- cd \$ANDROID\_ROOT/
- make api-stubs-docs-non-updatable-update-current-api
- make system-api-stubs-docs-non-updatable-update-current-api
- make -j\$(nproc)



## 6.4 Host SW Source Package Compilation

### 6.4.1 Compilation Flags

NXP_EXTNS=TRUE	Enable NXP extensions
----------------	-----------------------

Table 4: Compilation Flags

### 6.4.2 Configuration Files

Host specific configuration are available in the below path and all the configs are self-explanatory and some of the configs are listed below

SN110 Config path:

[https://github.com/NXPnFCProject/nfcandroid\\_nfc\\_hidlimpl/tree/br\\_android\\_ncihalx\\_comm\\_14/snxxx/halimpl/conf/SN1xx/sn110/gen-config-files](https://github.com/NXPnFCProject/nfcandroid_nfc_hidlimpl/tree/br_android_ncihalx_comm_14/snxxx/halimpl/conf/SN1xx/sn110/gen-config-files)

SN100 config path:

[https://github.com/NXPnFCProject/nfcandroid\\_nfc\\_hidlimpl/tree/br\\_android\\_ncihalx\\_comm\\_14/snxxx/halimpl/conf/SN1xx/sn100/gen-config-files](https://github.com/NXPnFCProject/nfcandroid_nfc_hidlimpl/tree/br_android_ncihalx_comm_14/snxxx/halimpl/conf/SN1xx/sn100/gen-config-files)

SN220 Config path:

[https://github.com/NXPnFCProject/nfcandroid\\_nfc\\_hidlimpl/tree/br\\_android\\_ncihalx\\_comm\\_14/snxxx/halimpl/conf/SN220/gen-config-files](https://github.com/NXPnFCProject/nfcandroid_nfc_hidlimpl/tree/br_android_ncihalx_comm_14/snxxx/halimpl/conf/SN220/gen-config-files)

PN557 Config path:

[https://github.com/NXPnFCProject/nfcandroid\\_nfc\\_hidlimpl/tree/br\\_android\\_ncihalx\\_comm\\_14/snxxx/halimpl/conf/PN557/gen-config-files](https://github.com/NXPnFCProject/nfcandroid_nfc_hidlimpl/tree/br_android_ncihalx_comm_14/snxxx/halimpl/conf/PN557/gen-config-files)

#### 6.4.2.1 Configuration in libnfc-\*.conf file

Table 5 indicates the reference for SNxxx

Configuration	Description
NFC_DEBUG_ENABLED	Application option to enable and disable logs. Enable 0x01      Disable 0x00
UICC_LISTEN_TECH_MASK	Force UICC to only listen to a specific technology. By default, the value is 0x07 i.e. it listens for the following technologies: Tech A, B and F
POLLING_TECH_MASK	Force Tag polling for the different Tech Notable bits: NFC Technology A   0x00 NFC Technology B   0x02

	NFC Technology F 0x04 Proprietary Technology ISO15693 0x08 NFC Technology A active mode 0x40 NFC Technology F active mode 0x80 Default = 0x4F (A B F ISO15693 B_PRIME A_ACTIVE F_ACTIVE)
P2P_LISTEN_TECH_MASK	Force P2P to only listen for the following technology(s) Notable bits: NFC Technology A 0x00 NFC Technology F 0x04 NFC Technology A active mode 0x40 NFC Technology F active mode 0x80 Default = 0x6F (A F A_ACTIVE F_ACTIVE)
PRESERVE_STORAGE	0x01 Preserves *.bin files 0x00 Deletes *.bin files
NFA_MAX_EE_SUPPORTED	Override the stack default for FA_EE_MAX_EE_SUPPORTED. The value is set to 3 by default as it assumes we will discover 0xF2, 0xF3, and 0xF4. If a platform will exclude and SE, this value can be reduced so that the stack will not wait any longer than necessary.
NFA_DM_DISC_NTF_TIMEOUT	Deactivate notification wait time out in seconds used in ETSI Reader mode. 0x00 Infinite wait
AID_MATCHING_MODE	Defines how the AID should be matched AID_MATCHING constants AID_MATCHING_EXACT_ONLY 0x00 AID_MATCHING_EXACT_OR_PREFIX 0x01 AID_MATCHING_PREFIX_ONLY 0x02 AID_MATCHING_EXACT_OR_SUBSET_OR_PREFIX 0x03
NFA_AID_BLOCK_ROUTE	0x00 Disable Black list 0x01 Enable Black list
NXP_WM_MAX_WTX_COUNT	Maximum WTX requests entertained by MW
DEFAULT_SYS_CODE	Set the default Felica T3T System Code: These settings will be used when application does not set this parameter
NXP_NFC_DEV_NODE	Nfc Device Node name i.e. "/dev/pn553"
MIFARE_READER_ENABLE	Extension for Mifare reader enable. Default=0x01

LEGACY_MIFARE_READER	Configuration to enable or disable legacy Mifare Reader implementation 0: General implementation 1: Legacy implementation
NXP_FW_NAME	File name for Firmware i.e. "libsn100u_fw.so"
NXP_AUTONOMOUS_ENABLE	0x01 Enable Autonomous mode 0x00 Disable Autonomous mode
NXP_GUARD_TIMER_VALUE	Guard Timer range to 0x0F-0xFF(15 to 255 seconds)
NXP_SYS_CLK_SRC_SEL	System clock source selection configuration 0x00 CLK_SRC_XTAL 0x01 CLK_SRC_PLL
NXP_SYS_CLK_FREQ_SEL	System clock frequency selection configuration CLK_FREQ_13MHZ 1 CLK_FREQ_19_2MHZ 2 CLK_FREQ_24MHZ 3 CLK_FREQ_26MHZ 4 CLK_FREQ_38_4MHZ 5 CLK_FREQ_52MHZ 6
NXP_DEFAULT_UICC2_SELECT	This is used to configure UICC2 at boot time. 0x03 UICC2
NXP_SWP_RD_TAG_OP_TIMEOUT	This configuration would be used to inform apps about secure reader timeout event when no tag tapped to reader within the configured timeout
DEFAULT_AID_ROUTE	Configuration to set default AID route. This settings will be used when application does not set this parameter host 0x00 eSE 0x01 UICC 0x02
DEFAULT_ISODEP_ROUTE	Set the ISODEP (Mifare Desfire) route Location : #This settings will be used when application does not set this parameter
DEFAULT_MIFARE_CLT_ROUTE	Configuration to set default mifare clt route location. host 0x00 eSE 0x01 UICC 0x02 UICC2 0x03
DEFAULT_FELICA_CLT_ROUTE	Configuration to set default mifare clt route location.

	host 0x00 eSE 0x01 UICC 0x02 UICC2 0x03
DEFAULT_SYS_CODE_ROUTE	Set the default Felica T3T System Code route Location host 0x00 eSE 0x01 UICC 0x02 UICC2 0x03
DEFAULT_AID_PWR_STATE	This settings will be used to configure power state for empty AID route entry in routing table bit pos 0 = Switch On bit pos 1 = Switch Off bit pos 2 = Battery Off bit pos 3 = Screen off unlock bit pos 4 = Screen On lock bit pos 5 = Screen Off lock
DEFAULT_DESFIRE_PWR_STATE	This settings will be used to configure power state for ISO_DEP proto route entry in routing table bit pos 0 = Switch On bit pos 1 = Switch Off bit pos 2 = Battery Off bit pos 3 = Screen off unlock bit pos 4 = Screen On lock bit pos 5 = Screen Off lock
DEFAULT_MIFARE_CLT_PWR_STATE	This settings will be used to configure power state for Type A & B tech route entry in routing table bit pos 0 = Switch On bit pos 1 = Switch Off bit pos 2 = Battery Off bit pos 3 = Screen off unlock bit pos 4 = Screen On lock bit pos 5 = Screen Off lock
DEFAULT_FELICA_CLT_PWR_STATE	This settings will be used to configure power state for Felica tech route entry in routing table bit pos 0 = Switch On bit pos 1 = Switch Off bit pos 2 = Battery Off bit pos 3 = Screen off unlock

	bit pos 4 = Screen On lock bit pos 5 = Screen Off lock
DEFAULT_T4TNFCEE_AID_POWER_STATE	This settings will be used to configure power state for T4T NFCEE NDEF AID entry in routing table bit pos 0 = Switch On bit pos 1 = Switch Off bit pos 2 = Battery Off bit pos 3 = Screen off unlock bit pos 4 = Screen On lock bit pos 5 = Screen Off lock
NFA_POLL_BAIL_OUT_MODE	Bail out mode If set to 1, NFCC is using bail out mode for either Type A or Type B poll. Default value is 0x01
PRESENCE_CHECK_ALGORITHM	Choose the presence-check algorithm for type-4 tag. If not defined, the default value is 1. #0 NFA_RW_PRESENCE_CHK_DEFAULT; Let stack selects an algorithm # 1 NFA_RW_PRESENCE_CHK_I_BLOCK; ISO-DEP protocol's empty I-block # 2 NFA_RW_PRESENCE_CHK_ISO_DEP_NAK; Type - 4 tag protocol iso-dep nak presence check command is sent waiting for rsp and ntf.
NFA_PROPRIETARY_CFG	It will be used to specify vendor Proprietary Protocol & Discovery Configuration Set to 0xFF if unsupported # byte[0] NCI_PROTOCOL_18092_ACTIVE # byte[1] NCI_PROTOCOL_B_PRIME # byte[2] NCI_PROTOCOL_DUAL # byte[3] NCI_PROTOCOL_15693 # byte[4] NCI_PROTOCOL_KOVIO # byte[5] NCI_PROTOCOL_MIFARE # byte[6] NCI_DISCOVERY_TYPE_POLL_KOVIO # byte[7] NCI_DISCOVERY_TYPE_POLL_B_PRIME # byte[8] NCI_DISCOVERY_TYPE_LISTEN_B_PRIME
NXP_NCI_PARSER_LIBRARY	0x01 Enable Lx debug information 0x00 Disable
NXP_CORE_PROP_SYSTEM_DEBUG	This config will enable different level of Rf transaction debugs based on the following values provided. Decoded information will be printed in adb logcat

	Debug Mode      Levels Disable Debug    0x00 L1 Debug          0x01 L2 Debug          0x02 L1 & L2 Debug    0x03 L1 & L2 & RSSI   0x04 L1 & L2 & Felica 0x05
HOST_LISTEN_TECH_MASK	Enable/Disable HOST to listen for a selected protocol # 0x00 : Disable Host Listen # 0x01 : Enable Host to Listen (A) for ISO-DEP tech A # 0x02 : Enable Host to Listen (B) for ISO-DEP tech B # 0x04 : Enable Host to Listen (F) for T3T Tag Type Protocol tech F # 0x07 : Enable Host to Listen (ABF)for ISO-DEP tech AB & T3T Tag Type Protocol tech F
FORWARD_FUNCTIONALITY_ENABLE	This config will be used to enable or disable the card emulation support for offshost SE's which are either type A or type B only # Disable          0x00 # Enable            0x01
OFF_HOST_ESE_PIPE_ID=0x16 OFF_HOST_SIM_PIPE_ID=0x0A OFF_HOST_SIM2_PIPE_ID=0x23	Configure the NFC Extras to open and use a static pipe. If the value is not set or set to 0, then the default is use a dynamic pipe based on a destination gate (see NFA_HCI_DEFAULT_DEST_GATE). Note there is a value for each EE (ESE/SIM1/SIM2)
NXP_FLASH_CONFIG	Flashing Options Configurations FLASH_UPPER_VERSION      0x01 FLASH_DIFFERENT_VERSION 0x02 FLASH_ALWAYS               0x03

**Table 5: Configuration Flags**

Note: conf files are available in below link. Please always refer the configuration file & description mentioned in configuration file to get latest updates and new added macros.

Link:

[https://github.com/NXPnfcProject/nfcandroid\\_nfc\\_hidlimpl/tree/br\\_android\\_ncihalx\\_comm\\_14/snxxx/halimpl/conf](https://github.com/NXPnfcProject/nfcandroid_nfc_hidlimpl/tree/br_android_ncihalx_comm_14/snxxx/halimpl/conf)

## 6.5 Feature Integration guideline

### 6.5.1 OMAPI Secure Element terminal configuration

Assignment of terminal number to each SE interface (SPI) is based on system configuration in **libnfc-nxp-SN100/SN110/SN220-example.conf**. These terminals are mapped to OMAPI framework SEService readers list. This section is not applicable for PN557.

Terminal Naming should start from eSE1 and continue in ascending order

(This is as per OMAPI SE service implementation)

Only terminal which are mapped in configuration file are reflected as readers available in SE service.

For Example: -

Order below is just an example

NXP\_SPI\_SE\_TERMINAL\_NUM="eSE1" -> eSE domain accessed via SPI interface

Additionally, from Android 11 onwards it is mandatory to enable terminals as per the system configuration in vendor/etc/vintf/manifest.xml

Based on number of terminals getting enabled in config file corresponding number of terminal instances need to be updated in manifest.xml as shown below

```
<hal format="hidl">

  <name>android.hardware.secure_element</name>

  <transport>hwbinder</transport>

  <version>1.1</version>

  <interface>

    <name>ISecureElement</name>

    <instance>eSE1</instance>

    :

  </interface>

  <fqname>@1.1::ISecureElement/eSE1</fqname>

  <fqname>@1.1::ISecureElement/eSE2</fqname>

</hal>
```

### 6.5.2 NFC DTA Setup

#### 6.5.2.1 NFC DTA Source

Information of NXPAndroidDTA Project repositories in the GitHub are as below:

NFC DTA source can be downloaded from the below link:

<https://github.com/NXPnfcProject/NXPAndroidDTA>

Copy NFC DTA source to /system/nfc-dta/ folder

### 6.5.2.2 Build NFC DTA

After building DTA, it generates 64-bit DTA binaries. To install DTA on the android device, ensure that adb is installed on the system and USB cable is connected between the system and the android device.

### 6.5.2.3 NFC DTA Binaries

1. The generated binary files should be pushed to the target devices as per the below table.

Project	Compiled Files	Location in target device
/system/nfc-dta/	libdta.so libosal.so libdta_jni.so libmwif.so	/system/lib64
/system/nfc-dta/	NxpDTA.apk	/system/app/NxpDTA (Create folder "NxpDTA" under /system/app in target device )

**Table 6: DTA specific binaries**

After updating the required files, the "NXP Device Test Application" appears in the main menu.

Setting to be done before running DTA APK are as below

1. Switch off the default NFC service option in Settings.

Settings->Connected Devices >NFC as OFF (Un-ticked) and reboot the device (using 'adb reboot').

2. Set Screen time out settings or Stay Awake option should be ticked.

Screen time out should be updated in the IUT settings to avoid the DTA RF signal loss. Because once the device goes to sleep mode immediately RF will be stopped from device, to avoid this device screen timeout should be increased to 30 minutes or device should powered. The following path can be used for updating the screen timeout setting.

Main menu -> Settings -> Developer Options -> Stay Awake.

Settings -> Display -> Sleep -> select 30 minutes.



### 6.5.3 Firmware Download

NXP provides precompiled firmware for ARM platforms. NXP also can provide firmware as .c file and it can be compiled as .so file with the platform compiler. Firmware resides at location `/system/vendor/lib64/` on the android target system. The firmware filename can be set in `NXP_FW_NAME` configuration in `libnfc-nxp.conf` file

Firmware can be updated when NXP releases an updated version. Steps to update are as follows:

1. Compile the firmware to .so file using the file received in .C file format. If firmware is in .so format then this step can be skipped.
2. Set the FW name in `libnfc-nxp.conf` file in `NXP_FW_NAME`
3. Push the firmware file to `/system/vendor/lib64` directory on target.
4. Reboot the device or disable and enable NFC service. New firmware will be downloaded during the NFC service boot up
5. Firmware file can be downloaded from below location

[https://github.com/NXP/nfc-NXPNFCC\\_FW/tree/master/sn1xx](https://github.com/NXP/nfc-NXPNFCC_FW/tree/master/sn1xx)

[https://github.com/NXP/nfc-NXPNFCC\\_FW/tree/master/sn220](https://github.com/NXP/nfc-NXPNFCC_FW/tree/master/sn220)

[https://github.com/NXP/nfc-NXPNFCC\\_FW/tree/master/pn557](https://github.com/NXP/nfc-NXPNFCC_FW/tree/master/pn557)

*Note 1: Firmware download can take up around 10 seconds including host delay.*

*Note 2: It is strongly recommended not to modify the original firmware download logic of Android NFC.*

*Note 3: It is recommended that Firmware is always upgraded and not downgraded. If firmware version is required to be downgraded, then please consult NXP.*

## 6.6 Android one specific

Android one compliant stack is where only vendor partition(HAL source), config files are from NXP remaining layers(Framework, NFC service, JNI and libnfc source) i.e. system partition is default AOSP source. Following section contains list of changes needed for Android-one specific configuration.

This section is not applicable for PN557

### 6.6.1 Card emulation through Off-host in Android-one platform

To achieve card emulation functionality through off-host(eSE/UICC) on Android one stack below changes are needed in libnfc-nxp config file which is different from regular config options

Default AOSP implementation only supports below config options related to routing table management

- 1) DEFAULT\_ISODEP\_ROUTE(libnfc-nci.conf)
- 2) DEFAULT\_SYS\_CODE\_ROUTE(libnfc-nxp.conf)
- 3) DEFAULT\_OFFHOST\_ROUTE(libnfc-nxp.conf)

Route	Value	
	Android One	Regular
eSE	0xC0	0x01
UICC1	0x80	0x02
UICC2	0x81	0x03

**Table 7: NFCEE route Ids**

Hence the platforms which are willing to use Card emulation functionality through off-host locations shall update config file with values indicated above

## 6.7 Enable SecureElement OMAPI AIDL interface to Vendor Services

To enable communication from KeyMint/Weaver HAL to SecureElement OMAPI AIDL service, following settings Required in the build environment

1. Add overlay in the device configuration folders as below (Example is given as per Dragon board)  
Create new folder **device/linaro/dragonboard/overlay/packages/apps/SecureElement/res/value**

Create new file "config.xml" with following content:

```
<?xml version="1.0" encoding="utf-8"?>
<resources>
  <!-- To enable vendor stable service, set this to true and
       make sure its vntf manifest entry is also configured. -->
  <bool name="secure_element_vntf_enabled">true</bool>
</resources>
```

config.xml file should be present in the  
"device/linaro/dragonboard/overlay/packages/apps/SecureElement/res/value"

2. Add following line in <ANDORID\_ROOT>/vendor/nxp/SNxxx/BoardConfigNfc.mk  
PRODUCT\_MANIFEST\_FILES += packages/apps/SecureElement/secure\_element-service.xml

## 6.8 Strongbox, Weaver & AuthSecret Hal Integration

NXP Secure Element enables tamper-resistant key storage for Android Apps using StrongBox. StrongBox is an implementation of the Keymaster HAL that resides in a hardware security module.

Weaver provides secure storage of secret value (device PIN/Password) that may only be read if the corresponding key has been presented.

This section is not applicable for PN557

### 6.8.1 Strongbox Hal(Keymaster 4.1) Integration

Android Keymaster 4.1 Hal intended for creation of Strongbox Keymaster instances to support the Android Hardware backed Keystore.

NXP Strongbox applet shall be preinstalled on eSE, please contact NXP CAS for further support.

- Get StrongBox HAL source from below location
  - [https://github.com/NXPnfcProject/nfcandroid\\_keymaster\\_hidlimpl/tree/br\\_android\\_ncihalx\\_comm\\_14](https://github.com/NXPnfcProject/nfcandroid_keymaster_hidlimpl/tree/br_android_ncihalx_comm_14)
- cp -rf nfcandroid\_keymaster\_hidlimpl/keymaster AOSP/hardware/nxp/JavacardKeymaster

- Enable compilation of strongbox HAL source by adding android.hardware.keymaster@4.1-service.javacard in board config file (vendor/nxp/SNxxx/device-nfc.mk)  
PRODUCT\_PACKAGES + android.hardware.keymaster@4.1-service.javacard
- Required sepolicy changes as below in vendor/nxp/SNxxx/sepolicy/file\_contexts  
#StrongBox Keymaster HAL  
+/(vendor|system/vendor)/bin/hw/android\.hardware\.keymaster@4\.1-service.javacard  
u:object\_r:hal\_keymaster\_default\_exec:s0
- Secure Element hal shall be configured as early hal in  
/1.2/android.hardware.secure\_element@1.2-service.rc  
**on post-fs-data** shall be updated  
**class hal** shall be updated to **class early\_hal**
- vendor/nxp/SNxxx/sepolicy/hal\_keymaster\_default.te shall have below entry  
# StrongBox Hal as a client of SeHal service  
hal\_client\_domain(hal\_keymaster\_default, hal\_secure\_element);  
allow hal\_keymaster\_default hal\_secure\_element\_default:binder call;
- Please make sure below binaries are present on device:
  - SB HAL binary: /vendor/bin/hw/android.hardware.keymaster@4.1-javacard.service
  - SB HAL init rc: /vendor/etc/init/android.hardware.keymaster@4.1-javacard.service.rc
  - Manifest: /vendor/etc/vintf/manifest/android.hardware.keymaster@4.1-javacard.service.xml

### 6.8.2 Weaver Hal Integration

NXP Weaver applet shall be preinstalled on eSE, please contact NXP CAS for further support.

Below steps shall be followed to enable Weaver Hal in Android.

- Download Weaver Hal source from NXP git hub
  - [https://github.com/NXPnfcProject/nfcandroid\\_weaver\\_hidlimpl](https://github.com/NXPnfcProject/nfcandroid_weaver_hidlimpl)
- Integrate Weaver Hal to AOSP Code (br\_android\_ncihalx\_comm\_14)
  - cp -rf nfcandroid\_weaver\_hidlimpl/weaver AOSP/hardware/nxp/weaver
  - Copy below folder if keymint hal is not integrated, please skip if keymint hal is integrated
    - cp -rf nfcandroid\_keymint\_hidlimpl/keymint/transport/ AOSP/hardware/nxp/weaver
    - Update include path in AOSP/hardware/nxp/weaver/libese\_weaver/Android.bp
- Required sepolicy rules for Weaver HAL in link below
  - [https://github.com/NXPnfcProject/NXPnfc\\_Reference/tree/br\\_android\\_ncihalx\\_comm\\_14/nxp/SNxxx/sepolicy/weaver](https://github.com/NXPnfcProject/NXPnfc_Reference/tree/br_android_ncihalx_comm_14/nxp/SNxxx/sepolicy/weaver)
- Add Below permission in “AOSP/vendor/nxp/SNxxx/sepolicy/file\_context”

- “(vendor|system/vendor)/bin/hw/android\\.hardware\\.weaver@1\\.0-service  
u:object\_r:hal\_weaver\_default\_exec:s0”
- Add Weaver HAL Service Pkg in “AOSP/vendor/nxp/SNxxx/Device.mk”
  - PRODUCT\_PACKAGES += android.hardware.weaver@1.0-service
  - BOARD\_SEPOLICY\_DIRS += vendor/\$(NXP\_VENDOR\_DIR)/SNxxx/sepolicy/weaver
- Minimal FW logic shall be enabled in NFC Hal(only required for SN110), Please make sure below configs are set
  - Android makefile: -DNXP\_NFC\_RECOVERY=TRUE
  - Libnfc-nxp config file option
    - # Enable or Disable the minimal FW recovery support.
    - # This logic will get enabled on early NFC hal boot.
    - # Disable NFCC RECOVERY support      0x00
    - # Enable NFCC RECOVERY support      0x01
    - NXP\_NFCC\_RECOVERY\_SUPPORT=0x01
  - NFC hal shall be configured as early hal, SE policy changes shall be adopted in SE and NFC hal  
[https://github.com/NXPnfcProject/NXPnfc\\_Reference/tree/br\\_android\\_ncihalx\\_comm\\_14/nxp/SNxxx/sepolicy](https://github.com/NXPnfcProject/NXPnfc_Reference/tree/br_android_ncihalx_comm_14/nxp/SNxxx/sepolicy)

### 6.8.3 Strongbox Hal(Keymint) Integration

Android Keymint Hal supportd Android Hardware backed Keystore. **Keymint & Keymaster both Hal are available in GitHub, but are mutually exclusive.** Only one service should be integrated in system. Also corresponding NXP Keymint/Keymaster applet shall be preinstalled on eSE. Please contact NXP CAS for info on which Hardware backed keystore is supported for specific chip types.

Keymint uses OMAPI Transport layer. Hence ARA rules need to be updated for keymint HAL to access eSE via OMAPI. Please contact NXP CAS for ARA applet and ARA rules support.

- Get Keymint HAL source from below location
  - [https://github.com/NXPnfcProject/nfcandroid\\_keymint\\_hidlimpl/tree/br\\_android\\_ncihalx\\_comm\\_14](https://github.com/NXPnfcProject/nfcandroid_keymint_hidlimpl/tree/br_android_ncihalx_comm_14)
- cp -rf nfcandroid\_keymint\_hidlimpl/keymint AOSP/hardware/nxp/JavacardKeymaster
  - Enable compilation of strongbox HAL source by adding android.hardware.security.keymint-service.strongbox in board config file (vendor/nxp/SNxxx/device-nfc.mk)  
 PRODUCT\_PACKAGES + android.hardware.security.keymint-service.strongbox
  - Required sepolicy changes as below in vendor/nxp/SNxxx/sepolicy/file\_contexts  
 #StrongBox Keymint HAL  
 + /vendor/bin/hw/android\\.hardware\\.security\\.keymint-service\\.strongbox  
 u:object\_r:hal\_keymint\_strongbox\_exec:s0

- vendor/nxp/SNxxx/sepolicy/hal\_keymint-strongbox.te shall have changes available in below link
  - [https://github.com/NXPnfcProject/NXPnfc\\_Reference/blob/br\\_android\\_ncihalx\\_comm\\_14/nxp/SNxxx/sepolicy/hal\\_keymint-strongbox.te](https://github.com/NXPnfcProject/NXPnfc_Reference/blob/br_android_ncihalx_comm_14/nxp/SNxxx/sepolicy/hal_keymint-strongbox.te)
- vendor/nxp/SNxxx/config.fs shall have changes available in below link & config.fs file should be added as TARGET\_FS\_CONFIG\_GEN (e.g., TARGET\_FS\_CONFIG\_GEN += vendor/nxp/SNxxx/config.fs) in BoardConfigNfc.mk
  - [https://github.com/NXPnfcProject/NXPnfc\\_Reference/blob/br\\_android\\_ncihalx\\_comm\\_14/nxp/SNxxx/config.fs](https://github.com/NXPnfcProject/NXPnfc_Reference/blob/br_android_ncihalx_comm_14/nxp/SNxxx/config.fs)
- Please make sure below binaries are present on device:
  - SB HAL binary: /vendor/bin/hw/android.hardware.security.keymint-service.strongbox
  - SB HAL init rc: /vendor/etc/init/android.hardware.security.keymint-service.strongbox.rc
  - Manifest: /vendor/etc/vintf/manifest/android.hardware.security.keymint-service.strongbox.xml
  - Manifest: /vendor/etc/vintf/manifest/android.hardware.security.sharedsecret-service.strongbox.xml
  - uuid mapping xml file : vendor/etc/hal\_uuid\_map\_config.xml

#### 6.8.4 AuthSecret Hal Integration

NXP IAR applet shall be preinstalled on eSE, please contact NXP CAS for further support.

Below steps shall be followed to enable AuthSecret Hal in Android.

- Download KeyMint Hal source from NXP git hub
  - [https://github.com/NXPnfcProject/nfcandroid\\_keymint\\_hidlimpl/tree/br\\_android\\_ncihalx\\_comm\\_14](https://github.com/NXPnfcProject/nfcandroid_keymint_hidlimpl/tree/br_android_ncihalx_comm_14)
- Integrate Weaver Hal to AOSP Code (br\_android\_ncihalx\_comm\_14)
  - cp -rf nfcandroid\_keymint\_hidlimpl/ authsecret AOSP/hardware/nxp/authsecret
- Copy below folder if keymint hal is not integrated, please skip if keymint hal is integrated
  - cp -rf nfcandroid\_keymint\_hidlimpl/transport/ AOSP/hardware/nxp/authsecret
  - Update include path in AOSP/hardware/nxp/authsecret/Android.bp
- Required sepolicy rules for AuthSecret HAL in link below
  - [https://github.com/NXPnfcProject/NXPnfc\\_Reference/tree/br\\_android\\_ncihalx\\_comm\\_14/nxp/SNxxx/sepolicy/hal\\_authsecret\\_default.te](https://github.com/NXPnfcProject/NXPnfc_Reference/tree/br_android_ncihalx_comm_14/nxp/SNxxx/sepolicy/hal_authsecret_default.te)
  - [https://github.com/NXPnfcProject/NXPnfc\\_Reference/tree/br\\_android\\_ncihalx\\_comm\\_14/nxp/SNxxx/sepolicy/secure\\_element.te](https://github.com/NXPnfcProject/NXPnfc_Reference/tree/br_android_ncihalx_comm_14/nxp/SNxxx/sepolicy/secure_element.te)
- Add Below permission in “AOSP/vendor/nxp/SNxxx/sepolicy/file\_context”

- “/vendor/bin/hw/android.hardware.authsecret-service.nxp  
u:object\_r:hal\_authsecret\_default\_exec:s0”
- Add AuthSecret HAL Service Pkg in “AOSP/vendor/nxp/SNxxx/Device.mk”
  - PRODUCT\_PACKAGES += android.hardware.authsecret-service.nxp
- BOARD\_SEPOLICY\_DIRS += vendor/\$(NXP\_VENDOR\_DIR)/SNxxx/sepolicy
- vendor/nxp/SNxxx/config.fs shall have changes available in below link & config.fs file should be added as TARGET\_FS\_CONFIG\_GEN (e.g., TARGET\_FS\_CONFIG\_GEN += vendor/nxp/SNxxx/config.fs) in BoardConfigNfc.mk
  - [https://github.com/NXPnfcProject/NXPnfc\\_Reference/blob/br\\_android\\_ncihalx\\_comm\\_14/nxp/SNxxx/config.fs](https://github.com/NXPnfcProject/NXPnfc_Reference/blob/br_android_ncihalx_comm_14/nxp/SNxxx/config.fs)
- Make sure uuid mapping xml file (vendor/etc/hal\_uuid\_map\_config.xml) UUID mapping for AuthSecret HAL service UID.

## 6.9 Enable ULPDET feature (Optional)

To enable ULPDET feature please add following property to the “libnfc-nxp.conf”

**NXP\_DEFAULT\_ULPDET\_MODE=1**

**Note:** This feature is supported only on SN220 chipset. This is not applicable for SN1xx & PN557.

## 6.10 Power Tracker feature (Optional)

- 1) To enable Power feature please add following property to the “libnfc-nxp.conf”  
**NXP\_SYSTEM\_POWER\_TRACE\_POLL\_DURATION\_SEC=30**
- 2) By Default power tracker specific libraries build as part of NFC HAL compilation
- 3) During full build add command line argument POWER\_TRACKER\_FEATURE=true to enable power tracker service.

Example: make TARGET\_NXP\_NFC\_HW=SN220 POWER\_TRACKER\_FEATURE=true

**Note:** This feature is supported only on SN220 chipset. This is not applicable for SN1xx & PN557.

## 7. Legal information

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Evaluation products** — This product is provided on an "as is" and "with all faults" basis for evaluation purposes only. NXP Semiconductors, its affiliates and their suppliers expressly disclaim all warranties, whether express, implied or statutory, including but not limited to the implied warranties of non-infringement, merchantability and fitness for a particular purpose. The entire risk as to the quality, or arising out of the use or performance, of this product remains with customer.

In no event shall NXP Semiconductors, its affiliates or their suppliers be liable to customer for any special, indirect, consequential, punitive or incidental damages (including without limitation damages for loss of business, business interruption, loss of use, loss of data or information, and the like) arising out of the use of or inability to use the product, whether or not based on tort (including negligence), strict liability, breach of contract, breach of warranty or any other theory, even if advised of the possibility of such damages.

Notwithstanding any damages that customer might incur for any reason whatsoever (including without limitation, all damages referenced above and all direct or general damages), the entire liability of NXP Semiconductors, its affiliates and their suppliers and customer's exclusive remedy for all of the foregoing shall be limited to actual damages incurred by customer based on reasonable reliance up to the greater of the amount actually paid by customer for the product or five dollars (US\$5.00). The foregoing limitations, exclusions and disclaimers shall apply to the maximum extent permitted by applicable law, even if any remedy fails of its essential purpose.

### Licenses

#### Purchase of NXP <xxx> components

<License statement text>

### Patents

Notice is herewith given that the subject device uses one or more of the following patents and that each of these patents may have corresponding patents in other jurisdictions.

<Patent ID> — owned by <Company name>

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are property of their respective owners.

<Name> — is a trademark of NXP Semiconductors N.V.



## Table of Contents

<b>1.</b>	<b>Introduction .....</b>	<b>3</b>
<b>2.</b>	<b>Abbreviations .....</b>	<b>5</b>
<b>3.</b>	<b>Scope .....</b>	<b>6</b>
<b>4.</b>	<b>General steps for Android NFC integration .....</b>	<b>7</b>
<b>5.</b>	<b>Architecture Overview .....</b>	<b>8</b>
<b>6.</b>	<b>Setup of Android NFC .....</b>	<b>9</b>
6.1	Android Kernel driver setup for NXP-NFCC and eSE .....	9
6.1.1	SNxxx .....	9
6.1.2	PN557 .....	10
6.2	Setup of Android NFC for Hikey .....	11
6.2.1	Downloading Android source code .....	11
6.2.2	Building the source code .....	12
6.2.3	Building driver out of kernel tree(for arm64 arch) .....	12
6.3	Android NXP NFC SW Delivery Package .....	12
6.3.1	Android NXP NFC Package Description .....	12
6.3.2	Integration of NXP NFC Modules for SNxxx & PN557 .....	13
6.3.3	Android NFC Apps and Lib on Target .....	15
6.3.4	Android Platform Modifications .....	16
6.4	Host SW Source Package Compilation .....	17
6.4.1	Compilation Flags .....	17
6.4.2	Configuration Files .....	17
6.5	Feature Integration guideline .....	23
6.5.1	OMAPI Secure Element terminal configuration .....	23
6.5.2	NFC DTA Setup .....	23
6.5.3	Firmware Download .....	25
6.6	Android one specific .....	26
6.6.1	Card emulation through Off-host in Android-one platform .....	26
6.7	Enable SecureElement OMAPI AIDL interface to Vendor Services .....	27
6.8	Strongbox, Weaver & AuthSecret Hal Integration .....	27
6.8.1	Strongbox Hal(Keymaster 4.1) Integration .....	27
6.8.2	Weaver Hal Integration .....	28
6.8.3	Strongbox Hal(Keymint) Integration .....	29
6.8.4	AuthSecret Hal Integration .....	30
6.9	Enable ULPDET feature (Optional) .....	31
6.10	Power Tracker feature (Optional) .....	31
<b>7.</b>	<b>Legal information .....</b>	<b>32</b>
	Definitions .....	32
	Disclaimers .....	32

Licenses	32
Patents	32
Trademarks .....	32