{Learn, Create, Innovate};

ROS

Visualisation Tools








What is RVIZ?

- RVIZ (ROS Visualization)
- Is a 3D visualisation environment
- Made to simplify debugging using visual tools.
- RVIZ allows the user to see what the robot is seeing, thinking and doing.


"See the world through the robot's eyes."

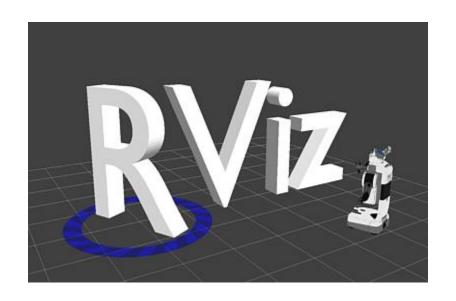





- There are two main ways of putting data into RVIZ.
 - Via messages, where it understands sensors and state information, like laser scans, point clouds, cameras, and coordinate frames.
 - They have specialised displays to let the user configure how to view that information.
 - Information markers, letting the user send cubes, arrows and lines coloured however you want.
- The combination of sensor data and custom visualisation markers makes RVIZ a powerful tool for robotic development.

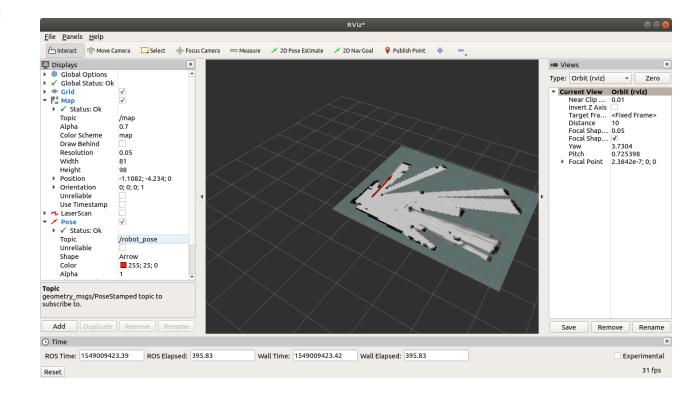





Quick Start (USB camera)

• Download the rospackage usb_cam

sudo apt install ros-<\$DISTRO>-usb-cam

Start ROS core (each step in a new terminal)

roscore

• Run the camera driver

*Add parameter _pixel_format:=yuyv if there is an error while decoding the frame


• Check that the topics are being published


rostopic list

Start RVIZ

rosrun rviz rviz

- Press the "add" button
- Go to the tab "By topic"
- Add the topic Camera, located under the topics
 /usb_cam -> /image_raw

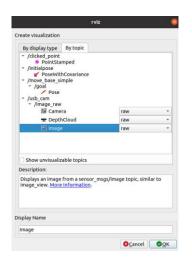

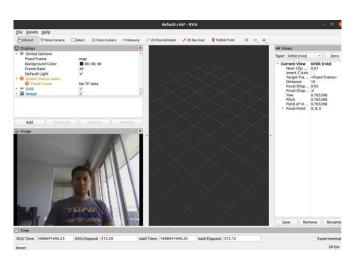

RVIZ

Markers




{Learn, Create, Innovate};





What are markers?

- One of the key features of RViz is the ability to visualize markers.
- Markers are graphical objects that represent different types of data in the 3D space.
- They can display points, lines, meshes, text, and more.
- Markers are typically published as ROS messages and can be subscribed to by RViz for visualisation.
- RViz provides a user-friendly interface for adding, configuring, and visualizing markers.

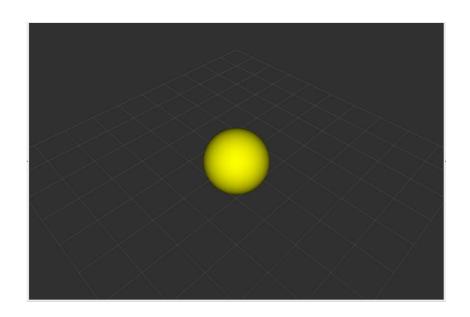






Type of markers?

- There are different types of markers that help us to visualise information in RViz.
- The basic markers are points, cubes, spheres, arrows, and lines.
- The user can set up and define its own markers and make them move.

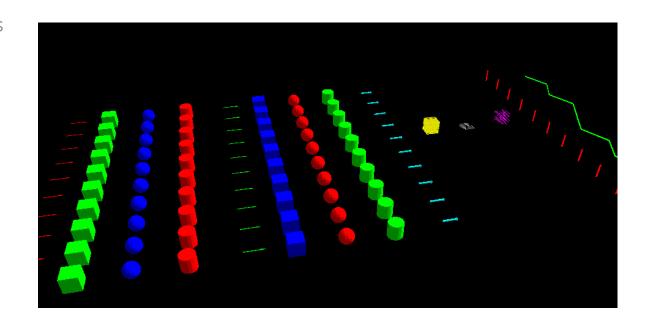



bool mesh use embedded materials




• Markers are defined as ROS messages in which the user inputs the type of marker, configuration and characteristics. More information here and here.

```
uint8 ARROW=0, uint8 CUBE=1, uint8 SPHERE=2, uint8 CYLINDER=3, uint8 LINE STRIP=4
uint8 LINE LIST=5, uint8 CUBE LIST=6, uint8 SPHERE LIST=7, uint8 POINTS=8, uint8 TEXT VIEW FACING=9, uint8 MESH RESOURCE=10,
uint8 TRIANGLE LIST=11
uint8 ADD=0, uint8 MODIFY=0, uint8 DELETE=2,
uint8 DELETEALL=3
                                     # header for time/frame information
Header header
                                     # Namespace to place this object in... used in conjunction with id to create a unique name for the object
string ns
                                   # object ID useful in conjunction with the namespace for manipulating and deleting the object later
int32 id
int32 type
                                   # Type of object
                                    # 0 add/modify an object, 1 (deprecated), 2 deletes an object, 3 deletes all objects
int32 action
                                        # Pose of the object
geometry msqs/Pose pose
geometry msqs/Vector3 scale
                                        # Scale of the object 1,1,1 means default (usually 1 meter square)
std msgs/ColorRGBA color
                                     # Color [0.0-1.0]
                                     # How long the object should last before being automatically deleted. O means forever
duration lifetime
                                     # If this marker should be frame-locked, i.e. retransformed into its frame every timestep
bool frame locked
#Only used if the type specified has some use for them (eq. POINTS, LINE STRIP, ...)
geometry msgs/Point[] points
#Only used if the type specified has some use for them (eq. POINTS, LINE STRIP, ...)
#number of colors must either be 0 or equal to the number of points
#NOTE: alpha is not yet used
std msgs/ColorRGBA[] colors
# NOTE: only used for text markers
string text
# NOTE: only used for MESH RESOURCE markers
string mesh resource
```

Activity 1

Markers

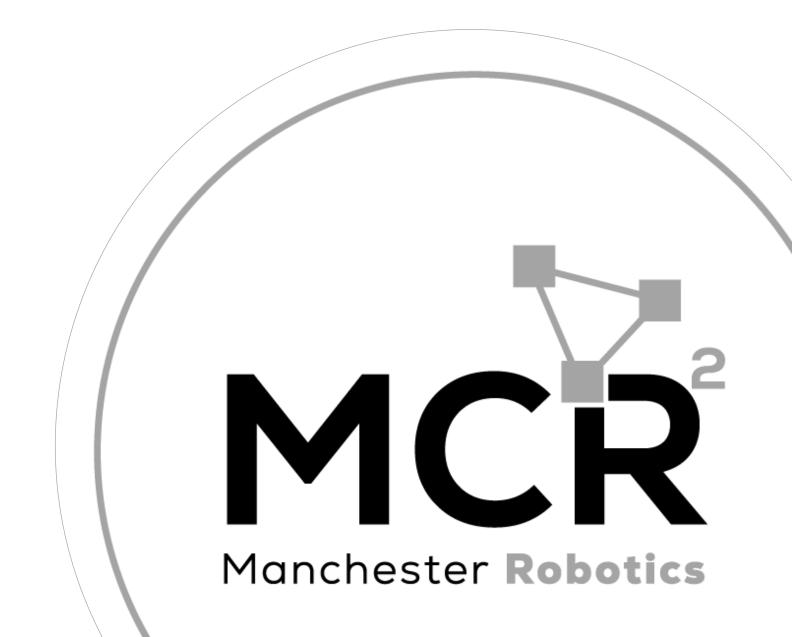

{Learn, Create, Innovate};





- Make a new package, with the following packages
 - rospy, std_msgs, tf2_ros, visualization_msgs tf_conversions, geometry_msgs
 catkin_create_pkg markers rospy std_msgs tf2_ros visualization_msgs tf_conversions geometry_msgs
- Create a node called *marker.py* inside the scripts folder

 mkdir scripts && touch scripts/marker.py
- Give executable permission to the file

cd ~/catkin_ws/src/markers/scripts/
 sudo chmod +x marker.py

Modify the CMake file to include the newly created node to the

catkin_install_python(PROGRAMS scripts/marker.py

DESTINATION \${CATKIN_PACKAGE_BIN_DESTINATION})







- Open the file marker.py
- Define a new marker called sun, its publisher and publish the marker.
- Compile the program

cd ~/catkin ws

catkin make

Start ROS

roscore

Run the node

rosrun markers marker.py

Start RViz

rosrun rviz rviz

- Add the marker
 - Press Add
 - >>By topic>>/sun>> marker

```
# Marker Message Example
sun = Marker()
                      #Declare Message
#Header
sun.header.frame id = "sun"
sun.header.stamp = rospy.Time.now()
#Set Shape, Arrow: 0; Cube: 1; Sphere: 2; Cylinder: 3
sun.id = 0
sun.type = 2
#Add Marker
sun.action = 0
                  #Action 0 add/modify, 2 delete object, 3 deletes all objects
# Set the pose of the marker
sun.pose.position.x = 0.0
sun.pose.position.y = 0.0
sun.pose.position.z = 0.0
sun.pose.orientation.x = 0.0
sun.pose.orientation.y = 0.0
sun.pose.orientation.z = 0.0
sun.pose.orientation.w = 1.0
# Set the scale of the marker
sun.scale.x = 2.0
sun.scale.y = 2.0
sun.scale.z = 2.0
# Set the colour
sun.color.r = 1.0
sun.color.g = 1.0
sun.color.b = 0.0
sun.color.a = 1.0
#Set Duration
```

sun.lifetime = rospy.Duration(0)





```
#!/usr/bin/env python
import rospy
from visualization msgs.msg import Marker
from std msgs.msg import Time
#Setup parameters, variables and callback functions here (if required)
# Declare message
sun = Marker()
def init sun():
   #Header
    sun.header.frame id = "sun"
    sun.header.stamp = rospy.Time.now()
   #Set Shape, Arrow: 0; Cube: 1; Sphere: 2; Cylinder: 3
    sun.id = 0
    sun.type = 2
    #Add Marker
    sun.action = 0
    # Set the pose of the marker
   sun.pose.position.x = 0.0
    sun.pose.position.y = 0.0
    sun.pose.position.z = 0.0
    sun.pose.orientation.x = 0.0
    sun.pose.orientation.y = 0.0
    sun.pose.orientation.z = 0.0
    sun.pose.orientation.w = 1.0
    # Set the scale of the marker
    sun.scale.x = 2.0
   sun.scale.v = 2.0
    sun.scale.z = 2.0
    # Set the color
    sun.color.r = 1.0
   sun.color.g = 1.0
    sun.color.b = 0.0
    sun.color.a = 1.0
    #Set Duration
    sun.lifetime = rospy.Duration(0)
```


```
#Stop Condition
def stop():
    print("Stopping")
if __name__=='__main__':
    #Initialise and Setup node
    rospy.init node("RVIZ marker")
    # Configure the Node
    loop rate = rospy.Rate(10)
    rospy.on shutdown(stop)
    print("The Sun is ready")
    #Setup the messages
    init_sun()
    #Setup Publishers and subscribers here
    pub sun = rospy.Publisher('/sun', Marker, queue size=1)
    try:
    #Run the node
       while not rospy.is_shutdown():
           sun.header.stamp = rospy.Time.now()
           pub sun.publish(sun)
           loop_rate.sleep()
    except rospy.ROSInterruptException:
        pass
                        Manchester Robotics
```






default.rviz - RViz File Panels Help r∰nloteract r∰Move Camera Select right focus Camera measure / 2D Pose Estimate / 2D Nav Goal Publish Point Global Options Create visualization Fixed Frame Background Color 48; 48; 48 Current View Orbit (rviz) By display type By topic Frame Rate Near Clip ... 0.01 Default Light Ψ 🛅 rviz Invert Z Axis Target Fra... <Fixed Frame> ▼ 📵 Global Status: ... AccelStamped Distance 10 Fixed Frame No TF data Focal Shap... 0.05 Camera → S Grid Focal Shap... ✓ ▼ DepthCloud Effort 0.785398 FluidPressure Field of Vi... 0.785398 Grid Focal Point 0: 0: 0 GridCells Group ▲ Illuminance Image ♠ InteractiveMarkers ✓ LaserScan Map Marker MarkerArray Displays an axis at the Target Frame's origin. More Information. Display Name Axes Save Remove Rename ROS Time: 1689239058.34 ROS Elapsed: 3.92 Wall Time: 1689239058.37 Wall Elapsed: 3.86 Experimental 31 fps Reset

• Change the fixed frame on top of RViz to "sun"

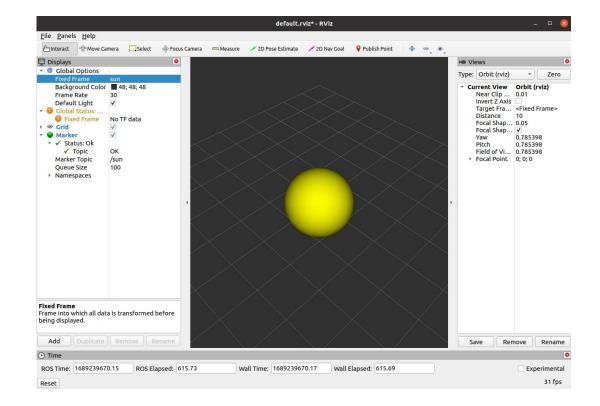

ROS Transformations

TF

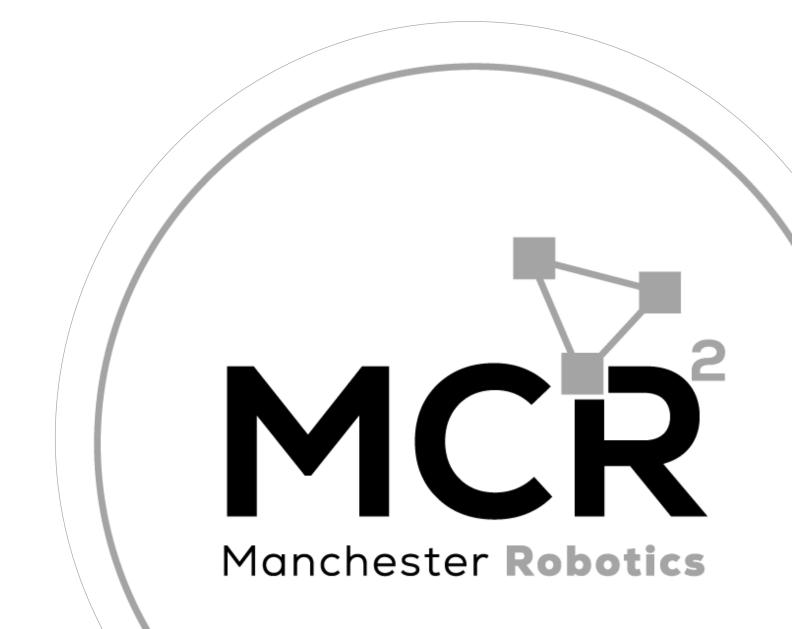

{Learn, Create, Innovate};




Coordinate transformations in



- Coordinate transformations refer to the process of converting coordinates from one coordinate system to another.
- Coordinate transformation, maps points or vectors from one reference frame to another, typically using mathematical equations or transformations.
- The purpose of coordinate transformations is to describe the same object or phenomenon in different coordinate systems or to simplify calculations in a specific frame of reference.

 These transformations can include rotations, translations, scaling, or combinations thereof, depending on the nature of the coordinate systems involved.

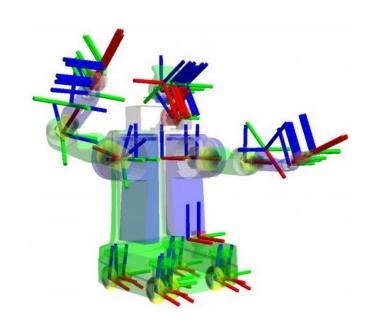




Coordinate transformations in ROS



- The tf library was created to establish a consistent method of monitoring coordinate frames and transforming data across the entire system.
- This ensures that users of individual components can trust that the data is in the desired coordinate frame without knowing all the coordinate frames used throughout the system.

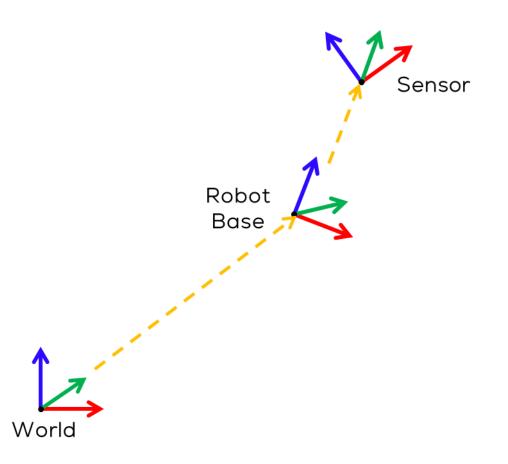




Coordinate transformations in ROS



- The tf library is based on a tree structure, where each node represents a coordinate frame.
- The tree is rooted in a fixed frame, usually called the "world" frame, which is typically a global reference frame.
- Each node in the tree represents a specific coordinate frame attached to a specific robot component through a transformation, such as a sensor or an actuator.

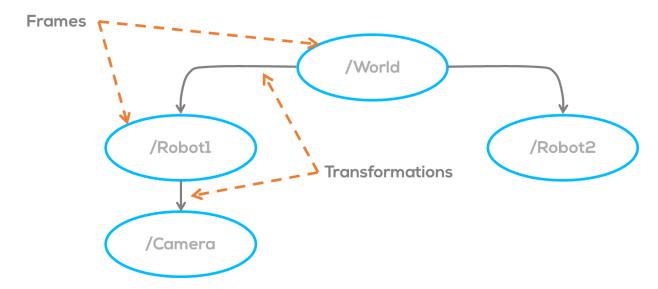




Coordinate transformations in POS



The tf library provides two main functionalities:

- 1. Broadcasting transformations: Each component of the robot that has a coordinate frame associated with it can publish its transformation with respect to another frame.
 - For example, a sensor mounted on a robot arm may publish its transformation with respect to the robot's base frame.
- These transformations are broadcasted over the ROS network, allowing other components to subscribe and receive updates.

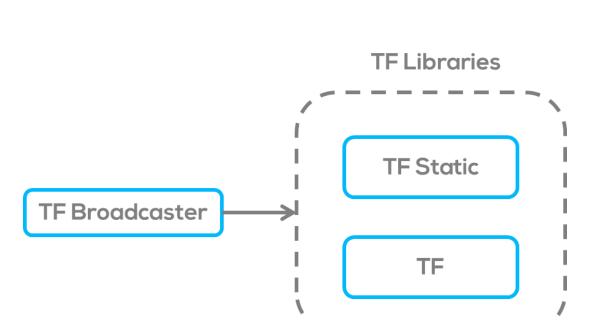


TF Publish



Coordinate transformations in ROS



- 2. Listening to transformations: Components that need to know the transformation between two frames can subscribe to these transformations using tf listeners.
 - The listener keeps track of the transformations being broadcasted and allows components to query the transformation between any two frames at any given time as long as they are connected in the tree.
- This is particularly useful for performing coordinate frame transformations on points or vectors from different parts of the system.

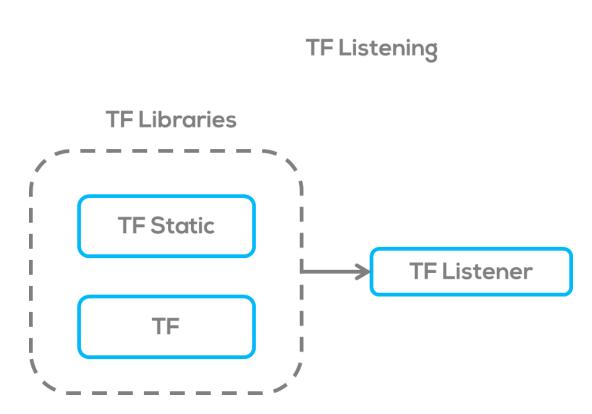




How it works?



- Frame definitions: Each component that needs
 to be tracked defines its own coordinate
 frame(s) and their relationship to other frames in
 the system.
 - For example, a robot arm may have a base frame and an end effector frame.
- Broadcasting transformations: Components with a defined frame can publish their transformations using a tf broadcaster. They periodically update the transformations based on their current state or sensor readings and broadcast them over the ROS network.

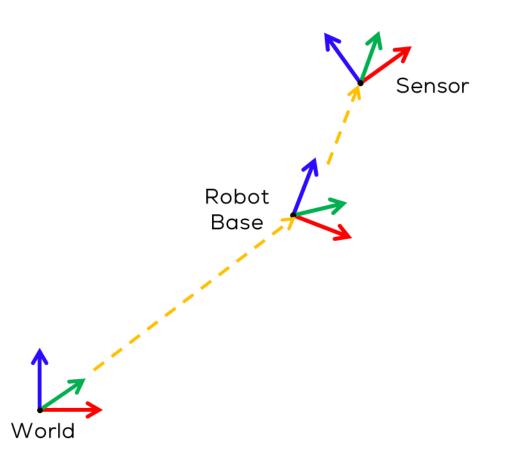




How it works?



- Listening to transformations: Components that need to use the transformations can create tf listeners. The listeners subscribe to the transformations being broadcasted and maintain an up-to-date view of the coordinate frame tree.
- Querying transformations: Components can query
 the tf listener for the transformation between two
 frames using the appropriate tf function.
 - For example, to transform a point from the sensor frame to the robot's base frame, a component would use the tf listener to get the transformation between the frames and apply it to the point.

- Managing coordinate frame updates: The library manages coordinate frame updates.
 - It handles situations where transformations arrive out of order, compensates for time delays, and interpolates between transformations to provide accurate and smooth frame transformations.

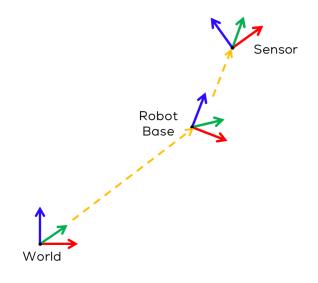



How it works?




Transform types:

- Static: Transforms that do not change over time. Sensor positions, actuator positions, etc.
- Dynamic: Can change over time. Sensor information frames of reference, other robots, etc.

The reason for having different transforms is that transformations that vary over time require to know if their information is out of date, to report an error if the broadcaster hasn't updated the transform over a period of time.

Static transforms, however, can be broadcast once and are assumed to be correct until a new one is broadcast.

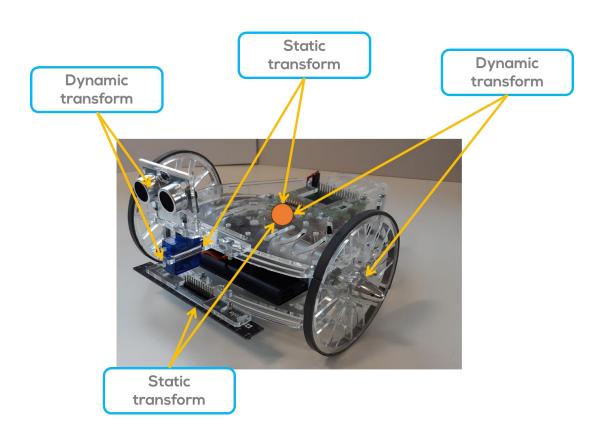



Declaring a transform



- Usually, transforms (static and dynamic) are declared inside the script where the information is published.
- Static transforms, however (Only static transforms) can be also declared inside launch files, without needing to be compiled.
- This is because static transforms are expected to not change over time.
- The static transform requires the following information

static_transform_publisher x y z yaw pitch roll frame_id child_frame_id



Static Transform Example



Declaring a Static Transform Example

In the package "markers" create a launch file called marker.launch"

• Write and save the following inside the launch file

 The Launch file Launches the previously created marker and creates a static transform. Launch the file

roslaunch marker marker.launch

Open RVIZ in another terminal


rosrun rviz rviz

- Change the Fixed Frame to "world"
- Click the button "Add" and on the "By display type" tab, select "Axes".
 - Repeat to Add two Axes
- Select one of the axes and change its "Reference Frame" to "link1"
- Click the button "Add" and on the "By Topic" tab, select Marker
- Click the button "Add" and on the "By display type" tab, select "TF".



Static Transform Example



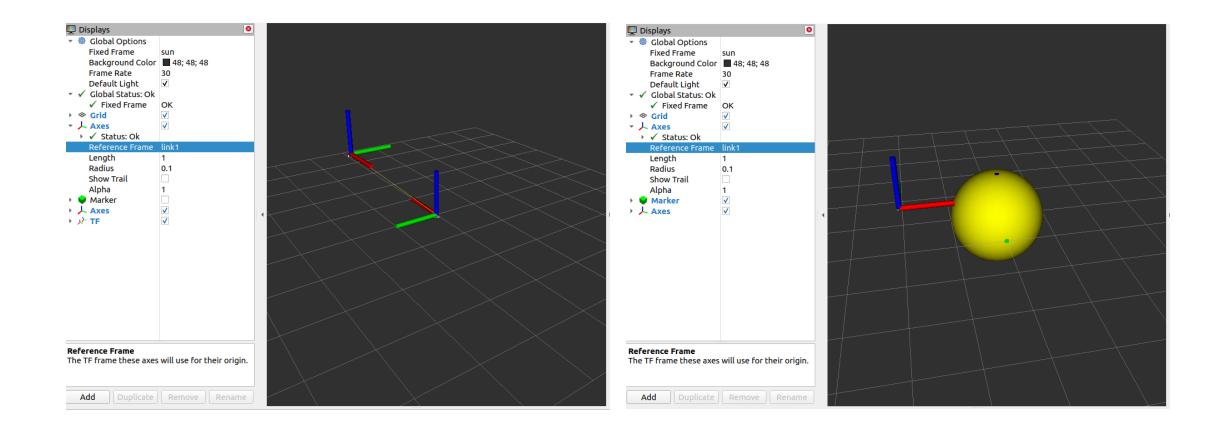




Declaring a transform



- Inside a script, transforms are declared using a Transform Stamped Message.
- The message is composed of a Header and the pose information of the frame, with respect to the parent frame and the name of the child frame.
- The Header contains the information about the message's time stamp and the parent frame.
- The rest of the message contains the information of the child frame ID, where the data is published and the pose transformation between the two frames.

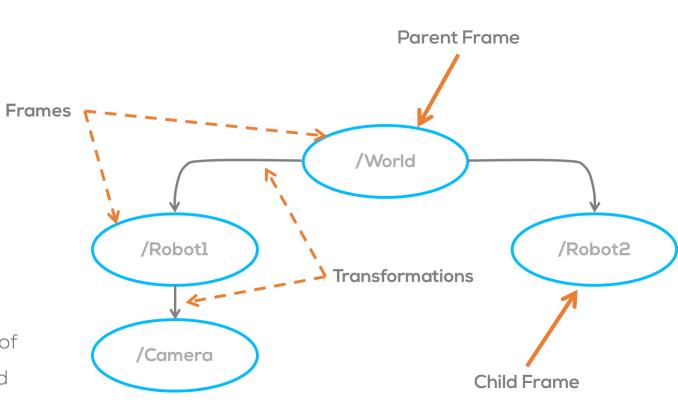



Declaring a transform



Transform Stamped Message

- The Transform Stamped Message, is under ROS geometry_msgs.
- The pose is divided into translation and rotation.
- The translation is in meters for each coordinate.
- The rotation is a quaternion.
- More information here.
- To transform from euler angles to quaternions in ROS the tf_conversions package can be used.

Transform Stamped Message

```
ex_tf = TransformStamped()
ex_tf.header.frame_id = "inertial_frame"
ex_tf.child_frame_id = "ex"
ex_tf.header.stamp = rospy.Time.now()
ex_tf.transform.translation.x = 1
ex_tf.transform.translation.y = 1
ex_tf.transform.translation.z = 1.0
ex_tf.transform.rotation.x = 0
ex_tf.transform.rotation.y = 0
ex_tf.transform.rotation.y = 0
ex_tf.transform.rotation.z = 0
ex_tf.transform.rotation.y = 1
```



Broadcasting / Listening a transform



- The idea of the "broadcaster" is closely related to the ROS "publisher".
- Allows to "broadcast" or publish a ROS transform.
- There are two types of broadcaster, depending on the type of transformation.
 - Static Broadcaster
 - Dynamic Broadcaster


```
staticbc_ex = StaticTransformBroadcaster()
dynamicbc_ex = TransformBroadcaster()
```

- The idea of the "listener" is closely related to the ROS "subscriber". More information <u>here</u>.
- Allows to "listen" or publish a ROS transform from one frame to another frame.
- The listener can be declared and used in any node, even if is unrelated to a frame, so long as there is a transformation relationship between the requested frames.
- To create a listener, a buffer is required to listen to the transformations and "buffer" them for 10 s.

```
tfBuffer = tf2_ros.Buffer()
listener = tf2_ros.TransformListener(tfBuffer)
trans = tfBuffer.lookup_transform(frame1, frame2,
rospy.Time(0))
```

Activity 2

Transformations

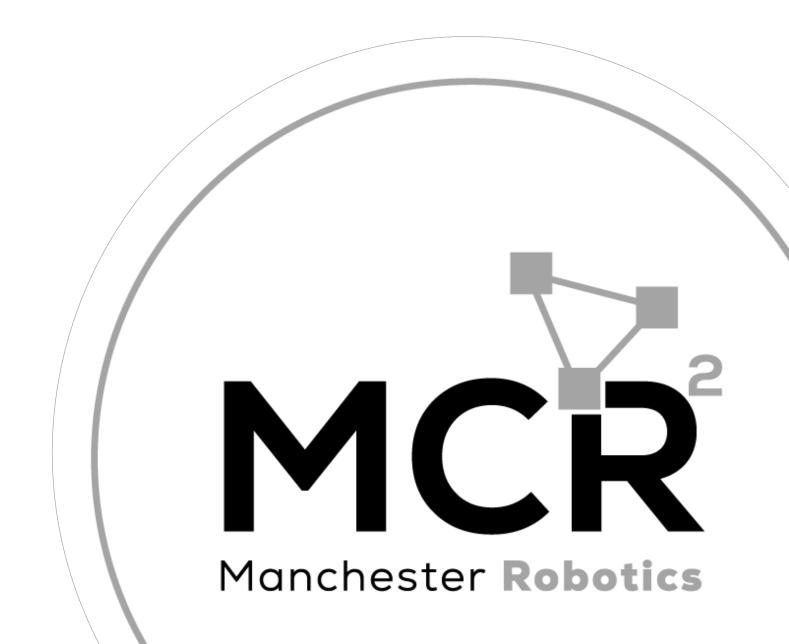

{Learn, Create, Innovate};



Transforms



- In this activity, Static and Dynamic transforms will be generated in a script.
- In the package "markers" create a new node called "tf_act.py"

```
cd ~/catkin_ws/src/markers/scripts/
     touch scripts/tf_act.py
```

• Give executable permission to the file

```
cd ~/catkin_ws/src/markers/scripts/
    sudo chmod +x tf_act.py
```

• Modify the CMake file to include the newly created node to the





Activity 2



- Open the file tf_act.py
- Define three new frames called, inertial, sun and planet, their publishers and publish the transforms.
- Compile the program

cd ~/catkin ws

catkin_make

Start ROS

roscore

Run the node

rosrun markers tf_act.py

Start RViz

rosrun rviz rviz


- Add the marker
 - Press Add
 - »By display type»TF

```
ex_tf = TransformStamped()
ex_tf.header.frame_id = "inertial_frame"
ex_tf.child_frame_id = "ex"
ex_tf.header.stamp = rospy.Time.now()
ex_tf.transform.translation.x = 1
ex_tf.transform.translation.y = 1
ex_tf.transform.translation.z = 1.0
ex_tf.transform.rotation.x = 0
ex_tf.transform.rotation.y = 0
ex_tf.transform.rotation.y = 0
ex_tf.transform.rotation.y = 0
ex_tf.transform.rotation.y = 1
```




MCR Activity 2



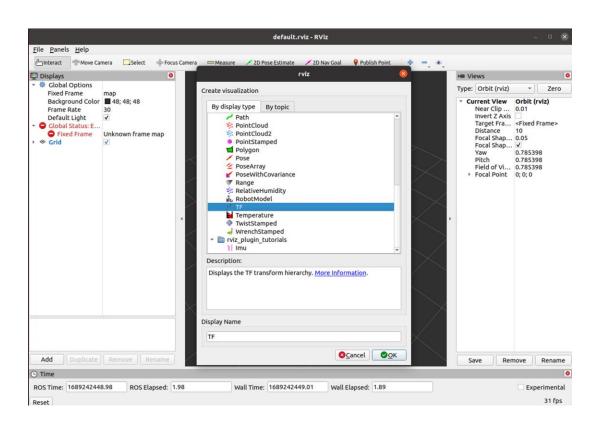

• Change the fixed frame on top of RViz to "inertial frame"

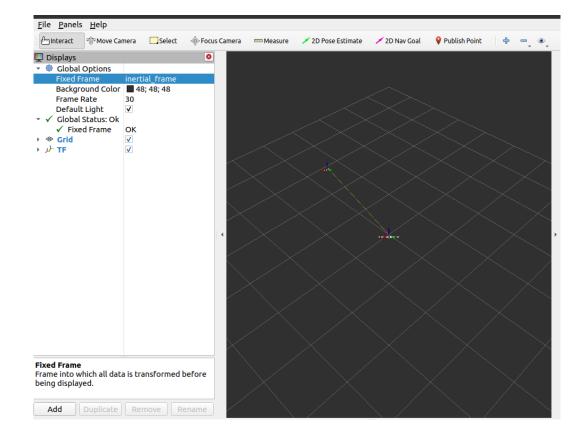

Activity 3

Planets

Manchester Robotics

{Learn, Create, Innovate};



Multiple Marker Generator



- In this activity the knowledge acquired in the previous two activities will be used to create a series of planets orbiting a sun.
- In the package "markers" create a new node called "markers.py"

```
cd ~/catkin_ws/src/markers/scripts/
     touch scripts/markers.py
```

Give executable permission to the file

```
cd ~/catkin_ws/src/markers/scripts/
    sudo chmod +x markers.py
```


• Modify the CMake file to include the newly created node to the


• Follow the previous two activities to add a planet marker to the "sun" frame, make a moon rotate around the planet and an arrow pointing to the moon using transforms.

Manchester Robotics






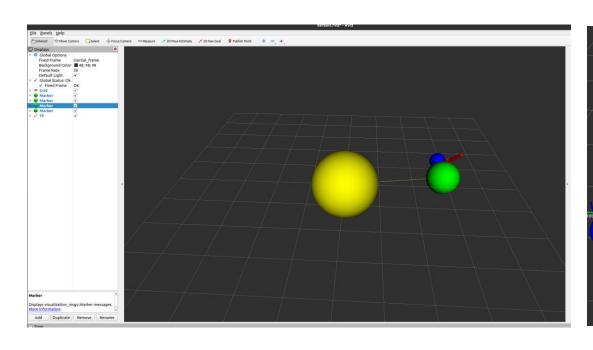

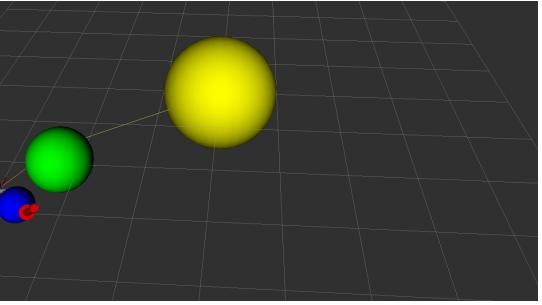

ROS Transformations

TF Listeners

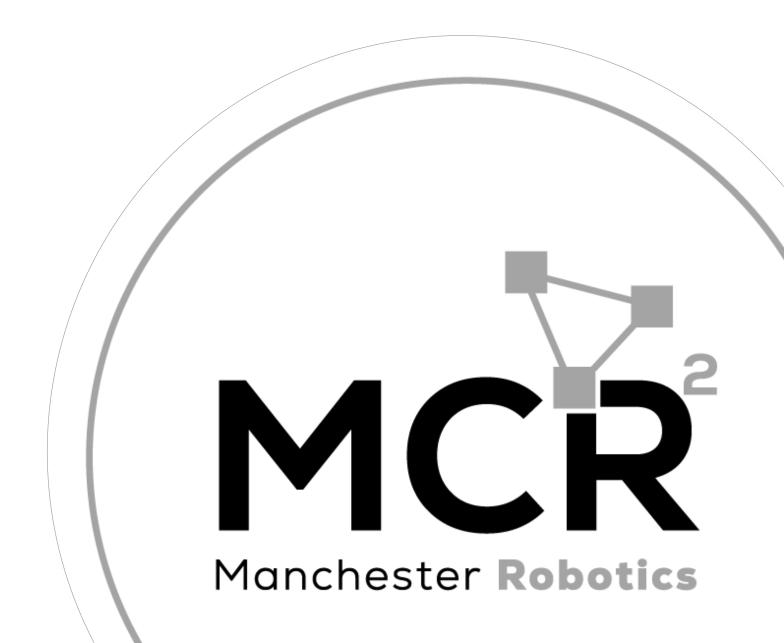


{Learn, Create, Innovate};



Transformation Listener in ROS



- A robotic system typically has many
 3D coordinate frames that change over time,
 such as a world frame, base frame, gripper
 frame, head frame, etc.
- When doing robotics, the user might have the following questions:
 - Where was the head frame relative to the world frame, 5 seconds ago?
 - What is the pose of the object in my gripper relative to my base?
 - What is the current pose of the base frame in the map frame?
- "Listening" to a transformations will solve such questions...

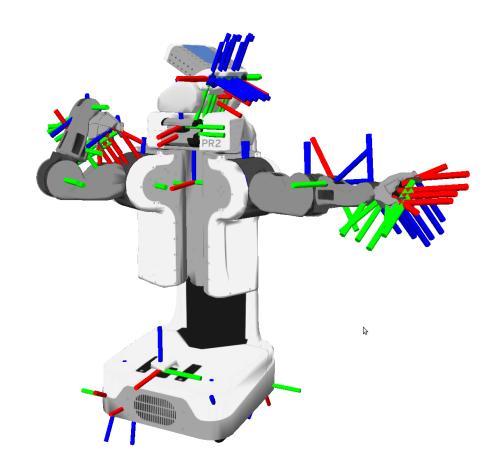




Transformation Listener in ROS



- As stated, transformation can be "listened" to; in other words, we can retrieve and manage transformation information between different coordinate frames in a robotic system.
- The Transformation Listener provides a way to keep track of the relationships between different coordinate frames as they change over time.

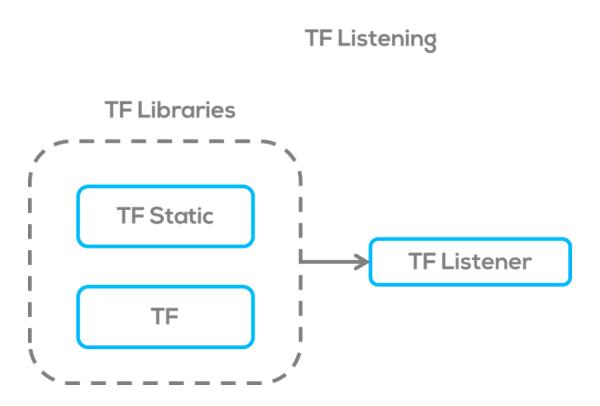




Transformation Listener in ROS



- Coordinate frames can represent the base of a robot, sensors like cameras and LIDAR, or objects in the robot's environment.
- The Transformation Listener allows you to query and receive the transformation information between these frames, essential for tasks like sensor fusion, motion planning, and robot control.

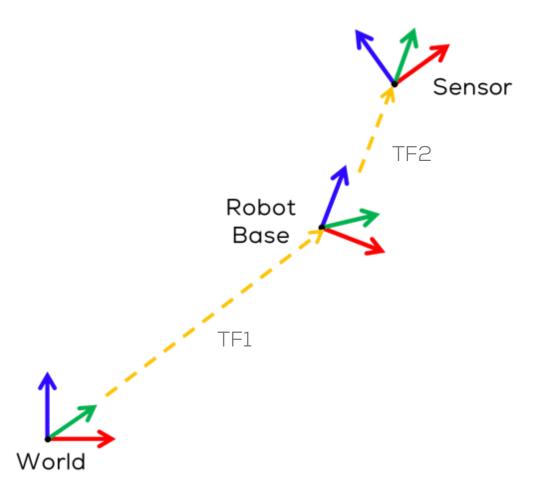



Transformation Listener ROS: Usage



- Query Transformations: You can use a

 Transformation Listener to query the


 transformation (translation and rotation) between

 two coordinate frames at a specific point in time.

 For example, you might want to know the position

 of a Lidar measurement, with respect to the robot's

 base frame.
- Dynamic Updates: The Transformation Listener is designed to handle dynamic transformations, which means it can provide you with the most up-to-date transformation information as it changes over time.
 This is crucial for real-time robotics applications.

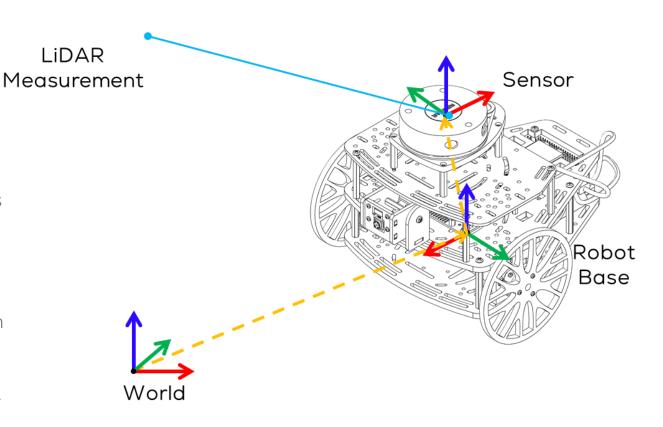




Transformation Listener ROS: Usage



- Buffering and Interpolation: The TF package buffers and interpolates transformation data, ensuring smooth transitions between frames, even if the data arrives at irregular intervals.
- Tree Structure: TF organizes the coordinate frames into a tree structure, with each frame being a node in the tree. This tree structure represents the relationships between frames in the robot's ecosystem.
- Listener API: ROS provides a listener API that allows you to subscribe to transformation updates. You can use this API to receive notifications when transformations change.

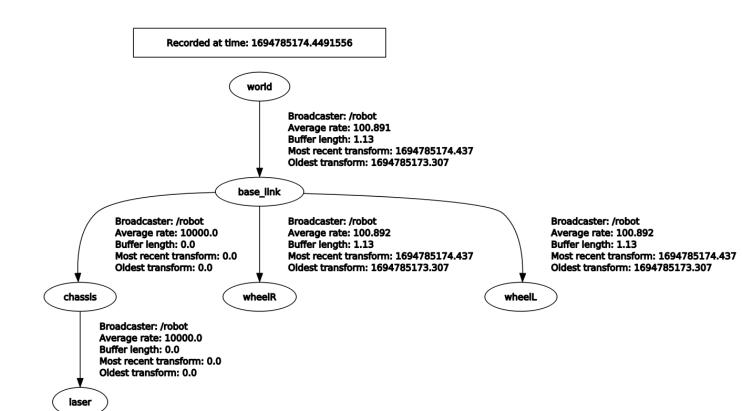



Coordinate transformations in ROS



- The user can "listen" to a transformation if there is a link between them and there are no timing errors.
- In ROS, the capability of "listening" to a transform is divided into the Buffer and the Listener. These objects are essential for receiving and managing transformation data.
- Where the buffer is primarily used for storing and managing the history of transformation data. It acts as a buffer to keep track of transformation information over time.

 The listener is a higher-level interface built on top of the tf2::Buffer. It simplifies the process of querying transformations between frames for common use cases.

TF Listening

TF Listener

Buffer




ROS TF2 Library



 As stated, ROS provides a simple way to listen to transformation using its <u>tf2 library</u>.

 tf2 maintains the relationship between coordinate frames in a tree structure buffered in time.

 The library lets the user transform points, Measurement vectors, etc., between any two coordinate frames at any desired point in time.

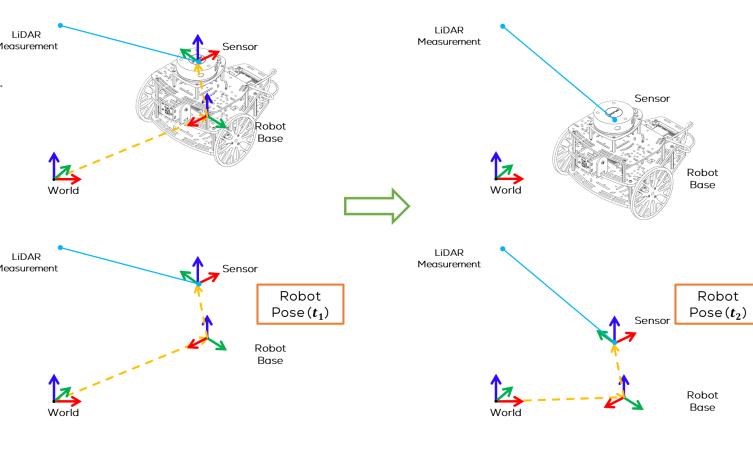



Coordinate transformations in ROS



- One of the most powerful options that the Listener of the TF2 library provides, is the ability to "Time Travel" in other words, the buffer maintains a history of transformation data, enabling you to query past transformations.
- The buffer can use this "History" to extrapolate or interpolate transformations and data.
- This capability can be used for tasks such as sensor fusion and control algorithms


Robot Base Robot Base Robot Pose (t₁) Robot Robot Pose (t₁) Robot Robot Robot Robot Robot Pose (t₂) Robot Pose (t₁)



Coordinate transformations in ROS




- Extrapolation: The buffer can extrapolate transformations when necessary, such as when you need to estimate a future transformation based on the history of data. For example, you might predict the position of an object a few milliseconds into the future.
- Interpolation: When you request a transformation at a specific time that falls between two available transformations, the buffer can interpolate the transformation data to provide a smooth and accurate result.

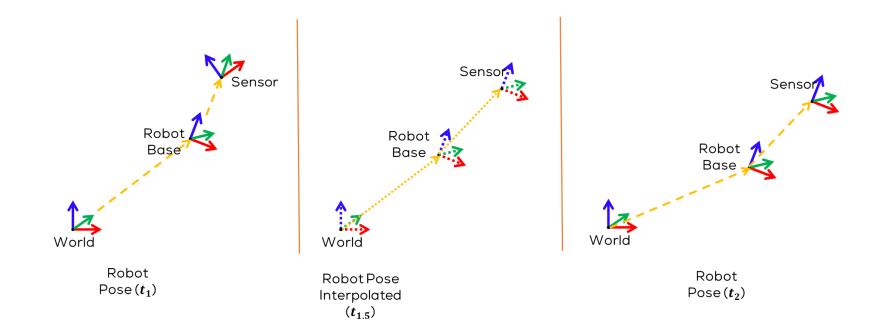

Activity 4

TF Listener

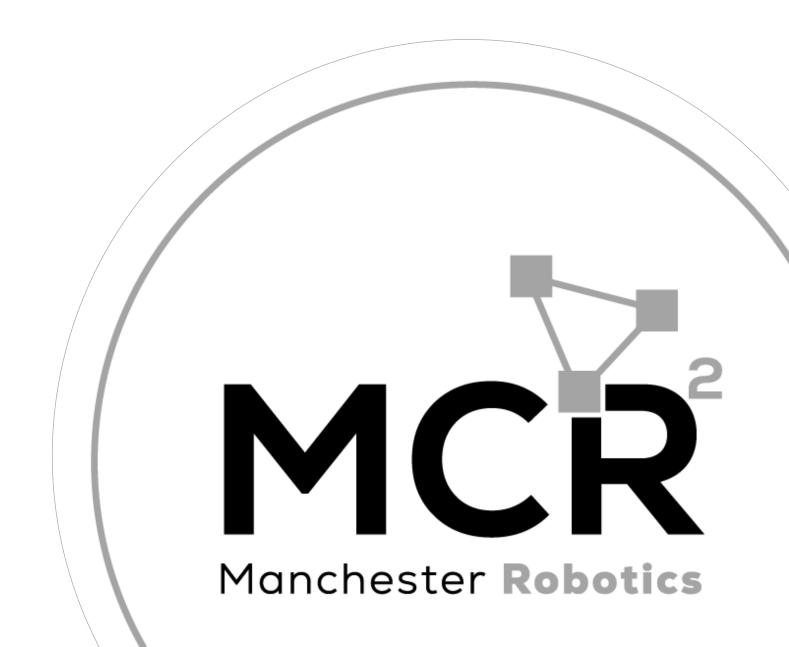

{Learn, Create, Innovate};





Crete a new node called markers_listener.py
inside the previously defined package
markers.py (full code on GitHub)

cd ~/catkin_ws/src/markers/scripts/
touch markers_listener.py

2. Make the file executable

sudo chmod +x markers_listener.py

3. Modify the CMake file to include the newly created node to the

catkin_install_python(PROGRAMS scripts/markers_listener.py
DESTINATION \${CATKIN_PACKAGE_BIN_DESTINATION})

4. Declare the transform listener and buffer in on the same section as a subscriber, using the following code (full code on Git Hub).

```
tfBuffer = tf2_ros.Buffer()
listener = tf2_ros.TransformListener(tfBuffer)
```

5. Get the transform in the variable *trans* as follows (main loop)



Activity 4



6. Compile the program


cd ~/catkin_ws
catkin make

7. Start ROS

roscore


8. Run the node

rosrun markers markers_listener.py

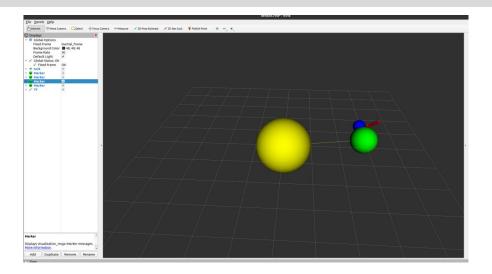

```
Transformation Matrix from moon to inertial_frame:
[[ 1.
                                       -3.38340817]
                                       -2.04036155]
header:
 seq: 0
 stamp:
   secs: 1694794792
   nsecs: 29780149
 frame_id: "inertial_frame"
child_frame_id: "moon"
transform:
 translation:
   x: -3.3834081737197574
   y: -2.0403615502875243
   z: 0.0
 rotation:
   x: 0.0
   y: 0.0
   z: 0.0
   w: 1.0
```


Thank you

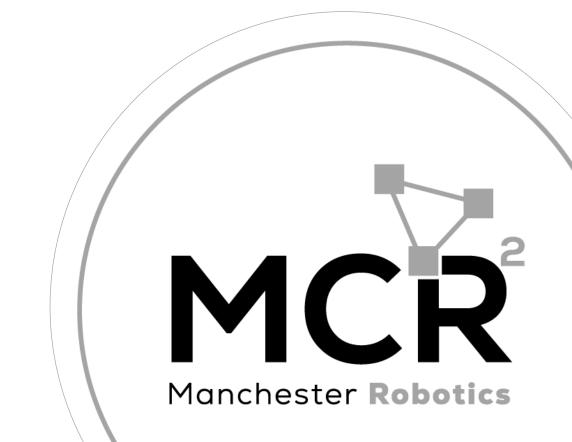

{Learn, Create, Innovate};

T&C

Terms and conditions

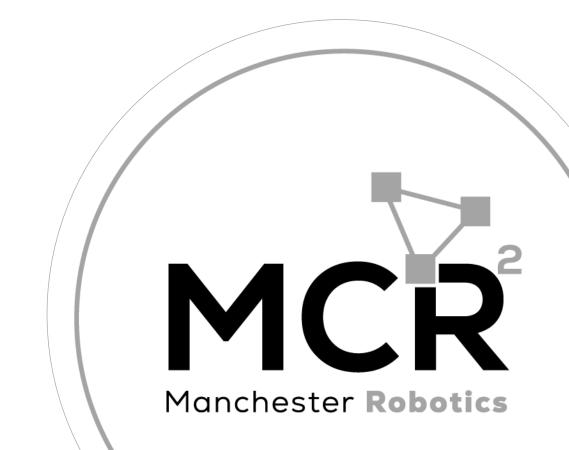

{Learn, Create, Innovate};



Terms and conditions



- THE PIECES, IMAGES, VIDEOS, DOCUMENTATION, ETC. SHOWN HERE ARE FOR INFORMATIVE PURPOSES ONLY.

 THE DESIGN IS PROPRIETARY AND CONFIDENTIAL TO MANCHESTER ROBOTICS LTD. (MCR2). THE INFORMATION,

 CODE, SIMULATORS, DRAWINGS, VIDEOS PRESENTATIONS ETC. CONTAINED IN THIS PRESENTATION IS THE SOLE

 PROPERTY OF MANCHESTER ROBOTICS LTD. ANY REPRODUCTION, RESELL, REDISTRIBUTION OR USAGE IN PART

 OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MANCHESTER ROBOTICS LTD. IS STRICTLY PROHIBITED.
- THIS PRESENTATION MAY CONTAIN LINKS TO OTHER WEBSITES OR CONTENT BELONGING TO OR ORIGINATING FROM THIRD PARTIES OR LINKS TO WEBSITES AND FEATURES IN BANNERS OR OTHER ADVERTISING. SUCH EXTERNAL LINKS ARE NOT INVESTIGATED, MONITORED, OR CHECKED FOR ACCURACY, ADEQUACY, VALIDITY, RELIABILITY, AVAILABILITY OR COMPLETENESS BY US.
- WE DO NOT WARRANT, ENDORSE, GUARANTEE, OR ASSUME RESPONSIBILITY FOR THE ACCURACY OR
 RELIABILITY OF ANY INFORMATION OFFERED BY THIRD-PARTY WEBSITES LINKED THROUGH THE SITE OR ANY
 WEBSITE OR FEATURE LINKED IN ANY BANNER OR OTHER ADVERTISING.