PRODUCT CATALOG 产品目录

电梯检测仪器系列 Elevator Detection Instrument Series

1	AR-1	电梯 AR 远程检验音像记录系统 Audio-visual Recording System for Elevator AR Remote Inspection
2	ET-NH	电梯能耗测试仪 Elevator energy consumption tester
3	ET-HYC	电梯钢丝绳滑移量检测仪 Elevator wire rope slip detector
4	ET-X1	电梯限速器测试仪 Elevator governor tester
5	ET-XT	限速器检验台 Governor inspection bench
6	ET-J1	电梯振动分析仪 Elevator vibration analyzer
7	ET-J4	电梯振动分析仪 Elevator vibration analyzer
8	ET-GZ	电梯钢丝绳张紧力测试仪 Elevator wire rope tension tester
9	ET-ZH	电梯 125%载荷制动试验保护装置 Elevator 125% load braking test protection device
10	ET-MN	电梯门锁啮合深度检测仪 Elevator door lock engagement depth detector
11	ET-MD	电梯层门导靴啮合深度动态检测仪 Dynamic detector for engagement depth of elevator landing door guide shoes
12	ET-MDC	电梯层门导靴啮合深度动态检测尺 Dynamic detection ruler for engagement depth of elevator landing door guide shoes
13	ET-JD	电梯轿厢与井道壁距离测量仪 Measuring instrument of distance between elevator car and shaft wall
14	ET-JNT	电梯井道壁强度检测仪 Elevator shaft wall strength detector
15	ET-DP	电梯平衡系数检测仪 Elevator balance coefficient detector
16	ET-DPL	电梯平衡系数检测仪（远程监控检测系统） Elevator balance coefficient detector (remote monitoring and detection system)
17	ET-YWC	电梯意外移动检测仪 Elevator unexpected movement detector
18	ET-ANT	电梯安全回路检测仪 Elevator safety loop detector
19	ET-KG	电梯极限开关检测仪 Elevator limit switch detector
20	ET-CZ	电梯超载测试仪 Elevator overload tester
21	ET-DCB	电梯导轨垂直度检测仪 Elevator guide rail verticality detector
22	ET-JC	电梯联动试验分析仪 Elevator linkage test analyzer
23	ET-DK	电梯开门间隙检测仪 Elevator door opening clearance detector
24	ET-M1	电梯层门受力变形量检测仪 Elevator landing door stress deformation detector
25	ET-DC	电梯盘车装置检测仪 Elevator turning gear detector
26	ET-CLC01	电梯曳引轮槽磨损检测仪 Elevator traction sheave groove wear detector
27	ET-CLC02	电梯曳引轮槽磨损检测尺 Elevator traction sheave groove wear detection ruler
28	ET-DGM	电梯导轨轨距及共面性测量仪 Elevator guide rail gauge and coplanarity measuring instrument
29	ET-DM	电梯关门压力测试仪 Elevator closing pressure tester
30	ET-DHC	电梯缓冲器复位检测仪 Elevator buffer reset detector
31	ET-G1/G2	电梯钢丝绳探伤仪 Elevator wire rope flaw detector
32	LIFT-01	电梯综合性能评估安全评估系统 Comprehensive performance evaluation and safety evaluation system of elevator

扶梯检测仪器系列 Escalator Detection Instrument Series

33	ET-FT	自动扶梯同步率测试仪 Escalator synchronization rate tester
34	ET-FT0	自动扶梯速度位移测试仪 Escalator speed displacement tester
35	ET-CWS	电梯扶梯多功能检测仪 Multifunctional detector of elevator and escalator
36	ET-KC4	电梯扶梯多功能测量尺 Multifunctional measuring ruler of elevator and escalator
37	ET-FTNH	扶梯动态啮合深度测量仪 Dynamic engagement depth measuring instrument of escalator
38	ET-FTJX	围裙板动态间隙测量仪 Dynamic clearance measuring instrument for apron board
39	ET-FTZ	自动扶梯综合测试仪 Comprehensive tester for escalator
40	ET-FTFN	自动扶梯综合性能安全评估系统 Comprehensive performance and safety evaluation system of escalator

起重机检测仪器系列 Crane Detection Instrument Series

41	ET-JG	激光测拱仪 Laser arch tester
42	ET-QPB	起重机导轨平顺度检测仪 Crane guide rail smoothness detector
43	ET-QDG	起重机动刚度测试仪 Dynamic stiffness tester of crane
44	ET-QJP	起重机纠偏量检测仪 Crane deviation correction detector
45	ET-QYH	起重机液压缸回缩量测试仪 Hydraulic cylinder retraction tester of crane
46	ET-QZX	起重机制动下滑量速度位移测试仪 Brake glide quantity, speed and displacement tester of crane
47	ET-Q1	起重机综合性能安全评估系统 Comprehensive performance and safety evaluation system of crane

自动扶梯同步率测试仪 ET-FT
Escalator synchronization rate tester ET-FT

Product functions:

It is suitable for measuring the running speed, acceleration, braking distance, speed deviation and synchronization rate of escalators and sidewalks, as well as measuring the length and rotation speed of objects.

Performance characteristics:

- The main measuring device is equipped with high-precision speed and displacement sensor and is of ergonomic design.
- The main measuring device is equipped with a screen to display the real-time speed of the measured object;
- It has the functions of real-time data curve and speed display and 64GB large capacity data storage;
- The main measuring device is independently powered and carries out wireless communication with the handheld control terminal;
- The main engine shell is made of light aluminum alloy, which is light and strong; the detection sensor features accurate data acquisition;
- Touch screen display interface, which supports the input of Chinese characters, numbers and characters at will, features simple interface and easy operation, and displays the remaining power;
- The main engine shell is made of light aluminum alloy, which is light and solid.

Technical parameters:

Speed measuring precision:	± 1mm/s
Speed measuring range:	0~5m/s
Displacement measuring precision:	± 0.5mm
Displacement measuring range:	0~9999.9999m
Printing method:	Bluetooth thermal printing

Escalator speed displacement tester ET-FTO

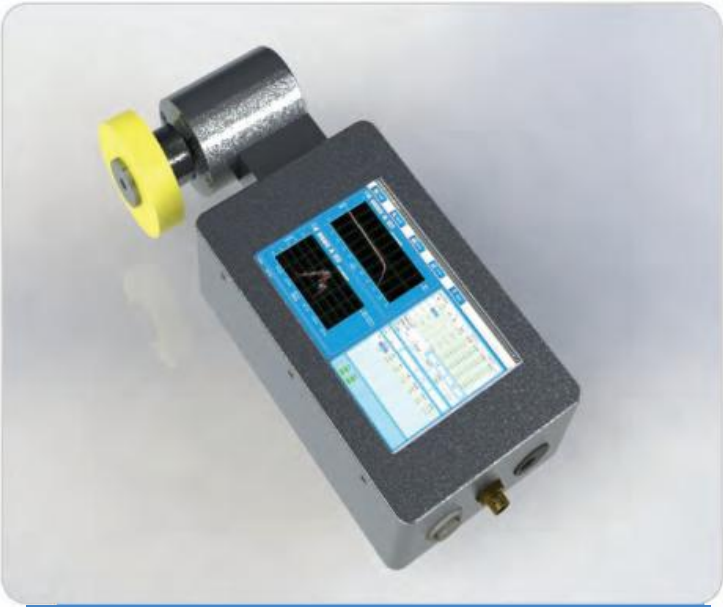

自动扶梯速度位移测试仪 ET-FT0
Escalator speed displacement tester ET-FT0

Product functions:

It is suitable for measuring the running speed, acceleration, braking distance, speed deviation and synchronization rate of escalators and sidewalks, as well as measuring the length and rotation speed of objects.

Performance characteristics:

- The main measuring device is equipped with high-precision speed and displacement sensor and is of ergonomic design.
- The main measuring device is equipped with a screen to display the real-time speed of the measured object;
- It has the functions of real-time data curve and speed display and large capacity data storage;
- The main engine shell is made of light aluminum alloy, which is light and strong; the detection sensor features accurate data acquisition;
- Touch screen display interface, which supports the input of Chinese characters, numbers and characters at will, features simple interface and easy operation, and displays the remaining power;
- The main engine shell is made of light aluminum alloy, which is light and solid.

Technical parameters:

Speed measuring precision:	± 1mm/s	Printing method:	Bluetooth thermal printing
Speed measuring range:	0~10m/s	Built-in lithium battery:	12V
Displacement measuring precision:	± 0.5mm	Displacement measuring resolution:	0.1mm
Displacement measuring range:	0~9999.9999m	Wireless transmission distance:	10m

电梯扶梯多功能检测仪 ET-CWS
Multifunctional detector of elevator and escalator ET-CWS

Product functions:

The elevator and escalator comprehensive detector is used for the integration of power module, speed measuring module, acceleration module, laser ranging and infrared temperature measurement; integrated design of illumination, humidity, noise, display and analysis software; the scope of application includes data monitoring and analysis of elevators and escalators, which can implement diversified operation and meets the daily use of inspectors, and the instrument is precise, compact and easy to carry.

Performance characteristics:

- It is characterized by short detection time, quick installation and rapid detection, and the measurement modes can be switched only by touching the option on the screen;
- It is characterized by high detection accuracy, quality certification and extraordinary performance, and high-precision sensors is used for configuration of integrated products;
- The test results are intelligent, sensor technology is used to collect data, artificial intelligence is used in data processing through accurate software analysis, and data reports can be directly displayed or printed through data fusion;
- It is characterized by tight structure and exquisite design, reasonable structure timing, small in size and convenient to carry;
- Escalator measurement function: contact measurement method is adopted, the starting torque is less than 1 mN·m, and the maximum allowable speed is 5,000 r/min;
- Elevator measurement function: measure the running speed, starting acceleration, braking deceleration, displacement and running time;
- Laser ranging function: space volume measurement can be automatically completed in combination with the space size measurement structure;
- Infrared temperature measurement function: outdoor temperature display function;
- Illuminance measurement function: low-power ambient light sensor is used to measure the illumination intensity within 0 - 200,000 lumens;
- Humidity measurement function: local air humidity detection function, intelligent temperature adjustment device and room temperature monitor, wireless transmission sensor;
- Noise measurement function: measurement of outdoor noise value.

Technical parameters:

Distance detection range:	< 50m	Temperature detection range:	-50~250°C
Distance detection precision:	< 1mm	Temperature detection precision:	< 0.19C
Speed detection range:	< 10m/s	Instrument volume:	Not more than 160*90*40 (mm)
Speed detection precision:	< 0.001m/s	Screen size:	≥ 3.5 inches (with touch function)
Acceleration measuring range:	± 8g	Instrument storage:	16G (expandable up to 256G)
Acceleration measuring precision:	< 0.001g	Power supply mode:	Rechargeable lithium battery

Multifunctional measuring ruler of elevator and escalator ET-KC4

电梯扶梯多功能测量尺 ET-KC4
Multifunctional measuring ruler of elevator and escalator ET-KC4

Product functions:

The multi-purpose detection ruler is the fourth generation measuring tool designed and developed by the Company; it is mainly used for measuring elevators, escalators, etc., and can measure the clearance between the leaves after the elevator landing door is closed, the locking element engagement distance of the landing door, the clearance between the escalator pedal and the attached apron plate, the engagement distance between the escalator pedal and the comb plate, the clearance between inner edges of escalator hand strap and the diameter of steel wire rope, etc.; it can display the measured value, and the detection information can be visually seen through the actual reading, which is convenient to install, fast to operate and accurate to detect.

Performance characteristics:

- Integrated measurement, independent detection process, zero setting at any position, which is convenient for relative measurement;
- The instrument is of two- segment mechanical clamping design, and the multi-functional measurement mode is achieved by staggering up and down and fixation, which is convenient for commissioning, easy to operate and suitable for most people;
- The mobile measuring part is designed with a groove, which not only implements the function switching but also implements the limit stroke, with the maximum stroke range of 0 - 32 mm, the limit stroke range of 0 - 30 mm and the depth of 2 mm;
- According to the requirements of different measuring functions, the datum planes of mobile measuring claw and fixed claw can be selected at will;
- In order to meet the needs of multi-functional measurement mode and multi-scene application, the design dimensions (width of 4 mm, thickness of 1 mm) of fixed claw and mobile measurement claw are reduced;
- It can be completed with only one ruler, which is convenient for most elevator and escalator detection applications in the market;
- It can be detected directly without calibration, and the detection result is the result of engagement depth;
- Alternate functions: data can be input into a computer or a special printer for data processing and printing by using a special connecting cable;
- Interface working mode: synchronous serial; transmission time: 0.5 ms;
- Data binary coding, with a width of 24 bits, sent twice every data, with a period of 300 ms (20 ms in quick display state);
- Lead: four, namely, power supply I, clock CP, data D and power supply+ from left to right;
- Data pulse amplitude: 0 level ≤ 0.2 V, 1 level ≥ 1.3 V;
- Clock CP: 90 kHz, valid at high level.

Technical parameters:

Measuring range:	0~32mm	Datum plane thickness:	1mm
Multifunctional measuring range:	0~30mm	Number of measuring claws:	2
Diameter of measurable wire rope:	0~20mm	Mobile measuring claw:	10mm
Resolution (mm):	0.01	Fixed claw:	8mm
Current source for measurement:	1.5V	Limit superposition:	2mm

扶梯动态啮合深度测量仪 ET-FTNH
Dynamic engagement depth measuring instrument of escalator ET-FTNH

Product functions:

This instrument can dynamically measure the engagement depth of the escalator comb plate, display the measured value and curve in real time, and the information that the engagement depth exceeds the standard can be intuitively understood through the standard engagement depth line.

Performance characteristics:

- Recordable parameters: the handheld control terminal monitors and displays real-time engagement depth values and curves throughout the whole process;
- The wireless transmission mode is adopted for the main body of the host and the main data collector, and no additional signal transmission antenna is required;
- Control system platform: windows operating system, which can intelligently analyze and generate the measurement report after the measurement is completed, and can print the test report on site by wireless printer;
- The dedicated memory chip is used to store the set parameters, test data and test results. Professional data analysis software can import the test data into the computer for save.

Technical parameters:

Measuring precision of engagement depth:	≤ 0.1mm
Measuring range of engagement depth:	0~30mm
Adjustment range of measuring area:	100mm
Installation time:	≤ 5s
Setting precision:	8'
Digital display range:	20mm
Built-in lithium battery:	Capacity 1000MHA

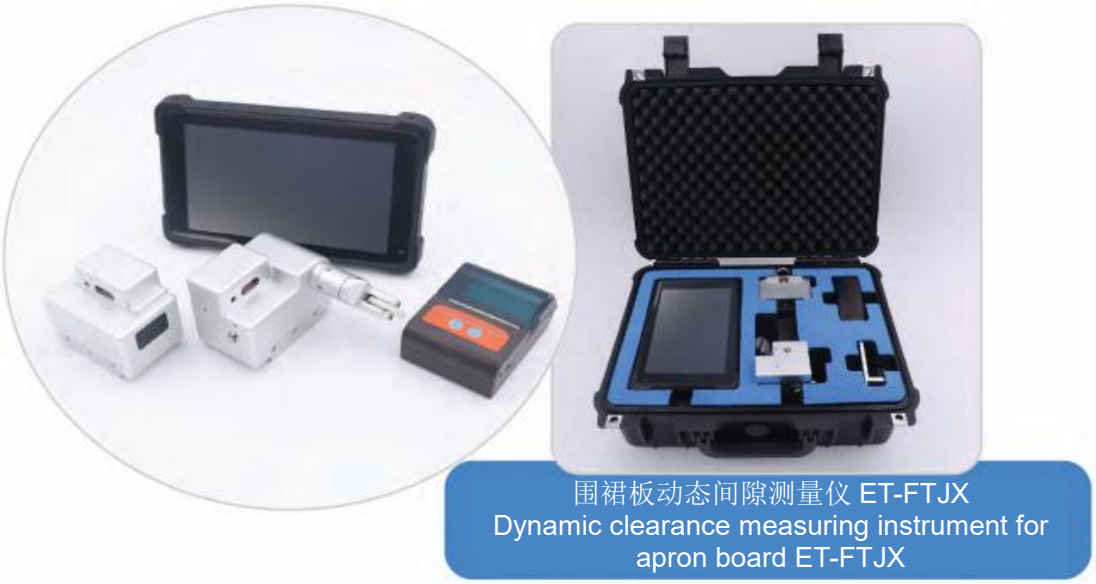

围裙板动态间隙测量仪 ET-FTJX
Dynamic clearance measuring instrument for apron board ET-FTJX

Product functions:

This measuring instrument is suitable for dynamic measurement of apron board clearance of escalator. It is equipped with imported high-precision laser displacement sensor (for clearance measurement) and travel detection device, and multi-channel data synchronous acquisition and processing technology and data communication technology are adopted to quickly collect the change of escalator step clearance in real time, upload it to the control terminal in real time, and display the change curve and measured data of step clearance through special software.

Performance characteristics:

- It detects the clearance between the left and right sides of the step and draws the clearance change curve.
- It detects the sum of step clearances and draws the curve of running distance and clearance change.
- It supports real-time data analysis, and gives sound alarm prompt when exceeding the specified clearance distance.
- It detects the step speed and braking distance.
- The operation is simple and convenient, wireless communication technology is adopted without power board, and the measurement process is completed automatically.
- High-precision laser displacement sensor is adopted, with high precision, high response frequency and accurate measurement.
- The stroke is collected independently, and the clearance value - position curve is intuitive and efficient.
- The step clearance curve automatically marks the out-of-limit area, and is equipped with sound alarm function.
- The clearance value and running distance are displayed in real time, and the clearance out-of-limit range value can be set manually.
- The curves of running distance and clearance value are printed on site.

Technical parameters:

Clearance measuring precision:	0.07mm
Measuring range of unilateral step clearance:	15mm
Scope of application:	Escalators and moving sidewalks
Step width:	600~1400mm
Angle:	0°~+50°

自动扶梯综合测试仪 ET-FTZ
Comprehensive tester for escalator ET-FTZ

Product functions:

It can simultaneously detect the speed, acceleration at starting and braking, deceleration at braking, braking distance, and the speed synchronization rate of hand straps and step pedals on both sides of public transportation shopping malls, airports and other types of escalators/moving sidewalks in three channels; in the process of detection, the data of steps and hand straps on both sides is dynamically displayed in real-time digital and curve.

Performance characteristics:

- Recordable parameters: The handheld control terminal monitors real-time figures and curves in the whole process;
- The wireless transmission mode is adopted for the data collector, and no additional signal transmission antenna is required;
- Control system platform: windows/ android operating system is compatible, which can intelligently analyze and generate the measurement report after the measurement is completed, and can print the test report on site by wireless printer;
- Display mode of speed curve: The handheld control terminal monitors real-time figures and curves in the whole process, the detection is carried out in three channels synchronously, and 1 - 3 channels are optional;
- Rotary adsorption structure or freely telescopic adjustable carbon fiber transverse support device is suitable for escalators with any spacing, with convenient connection and stable support;
- The three-channel data collector is of anti-fluctuation design;
- It can detect the speed, acceleration at starting and braking, deceleration at braking, braking distance, and the speed synchronization rate of hand straps and step pedals on both sides of various escalators/moving sidewalks;
- It support the functions of overspeed protection test and driving escalator to carry out overspeed protection test; it can detect the deviation protection function of escalator and pedestrian walkway hand straps;
- It can display the running speed and real-time speed curve of escalator steps and hand straps on both sides in real time, and can capture the overspeed protection speed when the overspeed protection device operates.

Technical parameters:

Speed measuring range:	0~3m/s
Speed measuring error:	≤1%
Speed measuring resolution:	0.001m/s
Deviation degree of three-channel speed measurement:	≤0.5%
Displacement measuring error:	≤1mm

Comprehensive performance and safety evaluation system of escalator ET-FTFN

ET-FTFN

自动扶梯综合性能安全评估系统

Comprehensive performance and safety evaluation system of escalator

Product functions:

It can enable ordinary escalators to simulate sudden failure in normal operation, and qualitatively and quantitatively record action details of protective devices corresponding to escalators when there are dangerous situations such as overspeed and reversal, so as to judge whether their protective functions meet the requirements of relevant national standards.
It simultaneously detects the speed, acceleration at starting and braking, deceleration at braking, braking distance, and the speed synchronization rate of hand straps and step pedals on both sides of public transportation shopping malls, airports and other types of escalators/moving sidewalks in three channels. In the process of detection, the data of steps and hand straps on both sides is dynamically displayed in real-time digital and curve.

Performance characteristics:

- Recordable parameters: The handheld control terminal monitors real-time figures and curves in the whole process;
- The wireless transmission mode is adopted for the main body of the host and the main data collector, and no additional signal transmission antenna is required;
- Windows/android operating system is compatible, which can intelligently analyze and generate the measurement report after the measurement is completed, and can print the test report on site by wireless printer;
- The dedicated memory chip is used to store the set parameters, test data and test results. Professional data analysis software can import the test data into the computer for save;
- Display mode of speed curve: The handheld control terminal monitors real-time figures and curves in the whole process, the detection is carried out in three channels synchronously, and 1 - -3 channels are optional;
- Press-type adsorption structure, suitable for escalators with any spacing, with convenient connection and stable support;
- All three data collectors are of anti-fluctuation design;
- It can detect the speed, acceleration at starting and braking, deceleration at braking, braking distance, and the speed synchronization rate of hand straps and step pedals on both sides of various escalators/moving sidewalks;
- It support the functions of overspeed protection test and driving escalator to carry out overspeed protection test; it can detect the deviation protection function of escalator and pedestrian walkway hand straps;
- It can display the running speed and real-time speed curve of escalator steps and hand straps on both sides in real time, and can capture the overspeed protection speed when the overspeed protection device operates.

Technical parameters:

Speed measuring range:	0-3m/s
Velocity measurement error:	≤1%
Speed measuring resolution:	0.001m/s
Deviation degree of three-channel speed measurement:	≤0.5%
Displacement measuring error:	≤1mm
Driver voltage:	380ACV
Maximum power:	18.5KW