

Ecolush PlyTM

HIGH - DENSIFIED

SHUTTERING PLYWOOD
AND PHENOLIC SHEETS



Driven by **QUALITY**
and **CUSTOMER SATISFACTION,**



ECO
FRIENDLY



CONSISTENT
QUALITY



TIMELY
DELIVERY



TRANSPARENT
SERVICE



@ECO_LUSH_



KERALA MUF / MR GRADE SERIES



■ RAW LEAF ■ CROWN PLATINUM ■ TOTAL LINE

HIGH DENSIFIED FILM FACED SHUTTERING PLYWOOD

SPECIFICATIONS

- ✓ **THICKNESS**
12mm | 15mm | 18mm ($\frac{1}{2}$ " , $\frac{5}{8}$ " , $\frac{3}{4}$ ")
- ✓ **SIZE**
1220 × 2440mm (4' × 8')
- ✓ **DENSITY**
25kg | 30kg | 34kg | 46kg | 50kg
- ✓ **GRADE**
MUF / MR
- ✓ **CORE**
Hardwood & Rubber Alternate Layers
- ✓ **SURFACE**
High-density film-faced sheet
- ✓ **USAGE**
Semi-commercial & residential

KEY FEATURES


-  **0% CORE GAP – STRONG & STABLE BONDING**
-  **UNIFORM THICKNESS FOR PRECISION**
-  **HIGH LOAD BEARING CAPACITY**
-  **EXCELLENT WATER & WEATHER RESISTANCE**
-  **TERMITE & BORER RESISTANT**
-  **SMOOTH FINISH FOR CONCRETE CASTING**
-  **MAX REPETITION GUARANTEE (UNDER PROPER USE)**

APPLICATIONS

- ✓ Construction Shuttering & Formwork
- ✓ Slabs, Beams, Columns & Bridges
- ✓ Industrial & Site Casting Work



Made in India



Premium quality


CRAFTED IN KERALA

HARIYANA PURE PF GRADE SERIES



SYMBOLTM
MIRROR FINISH SHUTTERING PLY
ALL LAYERS GLUED
100% WATER PROOF

SharfTM
ALL LAYERS GLUED
100% WATER PROOF

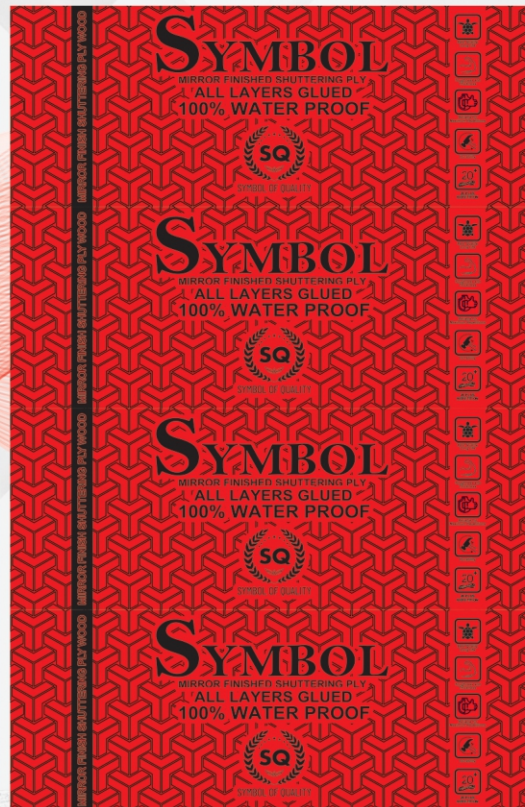

■ KGF GOLD

■ SYMBOL

■ SHARF HONOUR

PREMIUM BWP GRADE FILM FACED SHUTTERING PLYWOOD

GRADE	BWP
SURFACE	PHENOLIC FILM (RED & BROWN)
CORE	SELECTED HARDWOOD
EMISSION (GLUE)	E1 (PHENOL FORMALDEHYDE)
SIZE (M)	2.44 × 1.22 M
THICKNESS (MM)	12MM, 18MM, 21MM
WEIGHT (KG)	30, 34, 40, 50
DENSITY (KG/M ³)	700 – 1000
MOISTURE (%)	5 – 12%



IS 4990 Certified



BWP, and Borer Proof



H&C Compression Technology



High Reuse



Film Faced Shuttering Plywood



Suitable For Concrete Formwork



Red & Brown phenolic film overlay



18mm – 30kg & 34kg



18mm – 40kg & 50kg



Made in India



Premium quality

CRAFTED IN HARIYANA

CHIKMAGALUR SILVER OAK SERIES



Silver Oak, also known as *Grevillea robusta* is a durable hardwood widely used in construction, especially for centering and shuttering work.

Silver Oak Sizes & Typical Applications


Thickness (inches)	Width (inches)	Length (feet)	Typical Use	
1.5"	3"	6–9"		Joists / runners under shuttering sheet
2"	3"	6–10"		Beams / side supports
3"	4"	7–10"		Columns / beam supports
4"	4"	7–10"		Heavy beam or slab support
5"	5"	7–10"		Vertical supports (props)
1"	2" / 3"	6–8"		Plain load-bearing members
1"	2" / 3"	6–8"		Planks, formwork battens, or filler pieces



EASY BOARD FOOT MEASURE
FORMULA: $\frac{T \times W \times L}{144}$

T = THICKNESS
W = WIDTH
L = LENGTH



Made in India

★★★★★
Premium quality

SAWED IN CHIKMAGALURU