

A


B

C

D

E

F

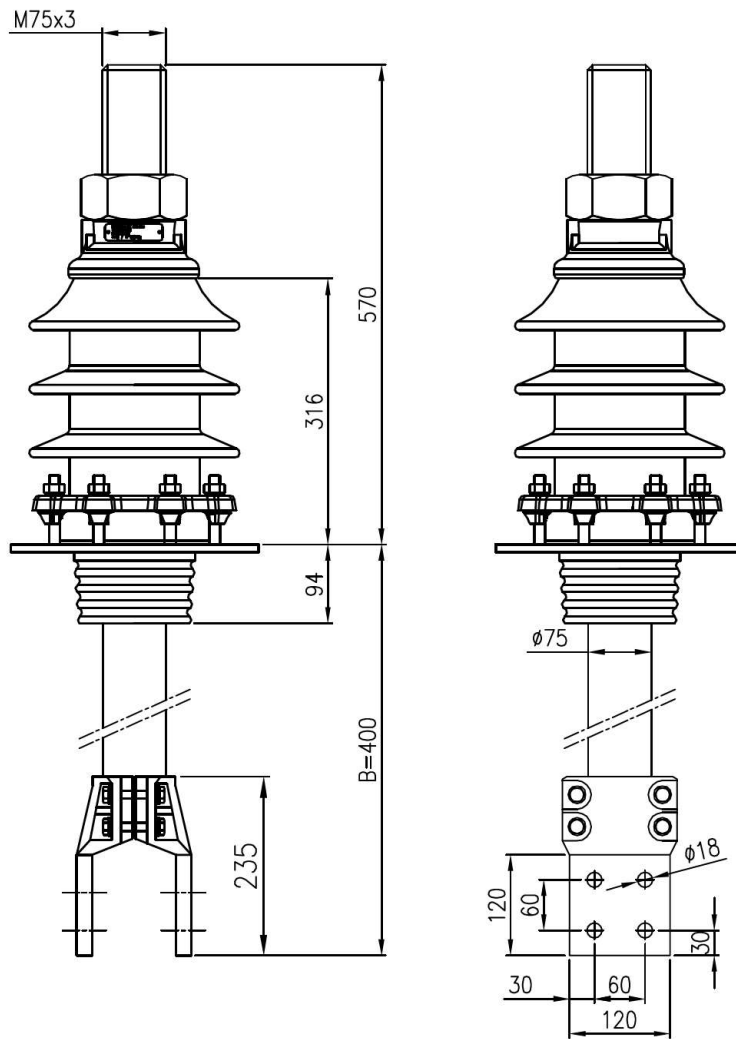

VOLTAGE (kV): 24
 CURRENT (A): 6300
 RELEVANT STANDARD:
☒ DIN
☐ UNEL Catalogue page:
☐ Other:
 ACTIVE PARTS IN AIR:
☒ Tinned 10µm
☐ Silver-plated 3 µm
☐ Other:
 FIXING COMPONENTS:
☐ Galvanized steel
☒ Stainless steel
 FLANGE:
☐ Aluminum
☐ Galvanized steel
☒ Stainless steel
 GASKETS:
☒ NBR (-25 °C/+115 °C)
☐ NBR (-40 °C/+115 °C)
☐ VITON (-10 °C/+115 °C)
☐ Special type:
 ARCING HORNS: ☐ YES ☒ NO

ACCESSORIES FOR THE UPPER PART:

Flag: ☐ Type: COMEM standard

☒ Customer drawing;


ACCESSORIES FOR THE LOWER PART:

Flag: ☐ Type: COMEM standard

☒ Customer drawing;

Nuts: ☐ Type:

NOTES: Bushing according to catalogue COMEM, pages 48, 49 and 58

1				X	16096495	BUCHA SOL CONDUT RIG		-				
Pos. Pos.	Quantidade Quantity		Material Material		Denominação Designation			Documento Document	Dimensão Dimension		Massa (Kg) Mass	
PESO BRUTO / GROSS WEIGHT			1,000		kg	PESO LIQUIDO / NET WEIGHT		1,000		kg	ESC / SCALE	1:9
500001958266					EMISSAO INICIAL			ISABELLA	LUCASDENKER	LUCASDENKER	28.06.2021	00
ECM ECM		LOC LOC		RESUMO MODIFICAÇÃO SUMMARY OF MODIFICATIONS			EXECUTADO EXECUTED	VERIFICADO CHECKED	LIBERADO RELEASED	DATA DATE	VER VER	
EXEC. /EXECUTED		ISABELLA				BUCHA SOL CONDUT RIG 24kV/6300A/125kV RIGID CON SOLID BUSH 24kV/6300A/125kV		10008730446 000 00				
VERIF. /CHECKED		LUCASDENKER										
LIBER. /RELEASED		LUCASDENKER										
DATA LB /REL DT		28.06.2021		WTD		BLUMENAU		TÉCNICO		FOLHA /SHEET 1 / 1		