



TRENCH
Sense the Power

TECHNICAL DATASHEET

41430529

V4

Bushing Type	OIL/AIR	COT 1050-2500 L500
Connection type	Fixed conductor	
Technology	Oil impregnated paper	

General specifications


Altitude	≤ 1600	m	Mounting angle	30	°
Length under flange L1	1184	mm	Product information	44497672E	
CT length L4	500	mm	Standard	IEC 60137-2017	
Temperature range	-30	+50	°C	-	

Electrical specifications

Rated lightning impulse withstand voltage (BIL)	1050	kV	Rated highest voltage for equipment (Um)	245	kV	
Rated current (Ir)	2500	A	Phase to earth voltage	142	kV	
Dry switching impulse withstand voltage (SIL dry)	850	kV	Power frequency withstand voltage (AC)	dry	505	kV
				wet	460	kV
Rated short-circuit current (Ith)	63 kA	3s	Rated frequency	50/60	Hz	

Routine tests (Up to 1000m)

Measurement of dielectric dissipation factor and capacitance at ambient temperature			149/245	kV
Measurement of partial discharge quantity # 10Pc			245	kV
Dry lightning impulse voltage withstand test			1103	kV
Dry power-frequency voltage withstand test	50 Hz	60s	505	kV
Voltage withstand test	Test tap		2	kV
	Voltage tap		-	kV
Tightness test			1,5	barg

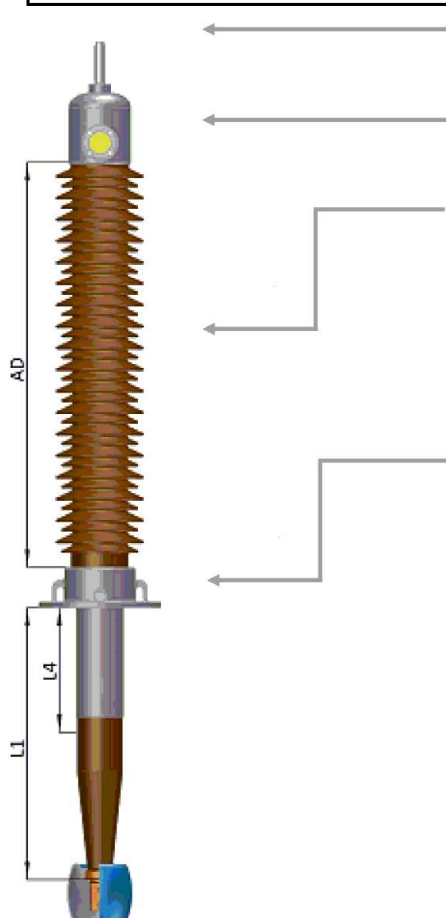

Top Terminal (air side)

Cylindrical Copper/Silver plated ø60x125	mm
--	----

Head

Oil level indicator type	Optical
--------------------------	---------

Insulator

Cantilever test load	500	daN
Insulator material	Brown porcelain	
Arcing distance AD	2150	mm
Creepage distance	7595	mm
USCD (IEC 60815)	53,7	mm/kV

Flange

Flange	Round 12xø22 BCD 400	mm
--------	----------------------	----

Lower terminal (oil side)

Cylindrical flat spot Copper ø60x125 Thickness 30 2xø14 spacing 45 (mm)

Shield

Bayonet shield H230 ø260/180 (mm)
Type of coating : Epoxy