
510x425x53 mm



PRODUCT STRUCTURE

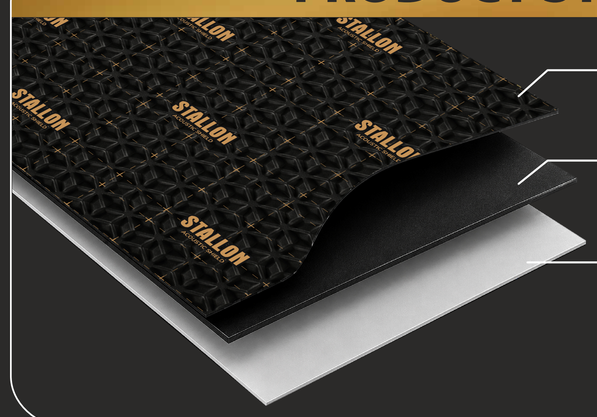

Geprägte Aluminiumfolie
Hitzebeständige Schicht für optimalen Wärmeschutz.

Embossed Aluminium Foil
Heat Resistant layer for thermal protection.

Premium-Butylschicht
Butyl mit hoher Dichte für hervorragende Vibrations- und Geräuschdämmung.

Premium Butyl Layer
High-Density Butyl for Superior Vibration and Noise Dampening.

Trennfolie
Leicht abziehbare Schutzfolie für eine einfache und problemlose Installation.

Release Liner
Easy Peel-Off Liner for Hassle-Free Installation.

Geräuschdämmung Auf Höchstem Niveau | HIGH-PERFORMANCE SOUND INSULATION
Unsere Hochleistungs-Dämpfungsmatte wurde entwickelt, um Fahrgeräusche, Vibrationen und unerwünschte Resonanzen effektiv zu reduzieren. Dank modernster Materialtechnologie verbessert sie den Fahrkomfort und sorgt für eine ruhigere Fahrzeugkabine.

Our high-performance damping sheet is engineered to effectively reduce road noise, vibrations, and unwanted resonance. Advanced material technology enhances driving comfort by creating a quieter and more comfortable vehicle cabin.

EIGENSCHAFTEN | FEATURES
- Hervorragende Geräusch- und Vibrationsdämmung | Excellent noise and vibration reduction
- Hohe Temperaturbeständigkeit | High temperature resistance
- Wasser- und feuchtigkeitsresistent | Water and moisture resistant
- Starke Selbstklebeschicht für einfache Montage | Strong Self-adhesive Backing For Easy Installation
- Langlebig und korrosionsbeständig | Durable and corrosion-resistant
- Geeignet für Türen, Boden, Dach, Kofferraum und Motorraum | Suitable for doors, floor, roof, trunk, and engine compartment

GER MAN TECHNOLOGY

Technical Specifications

Material	BUTYL RUBBER WITH ALUMINIUM FOIL
Thickness	2.3mm ± 0.2mm
Sheet Size	800 mm x 460mm
Operating Temperature	-40℃ To 120℃
Density	1.6 ± 0.1
Flammability	Self Extinguishing
Application	Interior & Exterior Panels

www.stallongroup.in