

# **SMART TRAFFIC CONTROL SYSTEM WITH EMERGENCY VEHICLE DETECTION USING IOT**

## **PHASE I REPORT**

*Submitted by*

**MANYA KARTHIK 210701152**

**NITISH K 210701183**

*In partial fulfillment for the award of the degree of*

## **BACHELOR OF ENGINEERING IN COMPUTER SCIENCE AND ENGINEERING**



**DEPARTMENT OF COMPUTER SCIENCE  
RAJALAKSHMI ENGINEERING COLLEGE, CHENNAI**

**2024**

**ANNA UNIVERSITY, CHENNAI**

## **BONAFIDE CERTIFICATE**

Certified that this Report titled “**SMART TRAFFIC CONTROL SYSTEM WITH EMERGENCY VEHICLE DETECTION USING IOT**” is the Bonafide work of **MANYA KARTHIK (210701152), NITISH K (210701183)** who carried out the work under my supervision. Certified further that to the best of my knowledge the work reported here does not form part of any other thesis or dissertation on the basis of which a degree or award was conferred on an earlier occasion on this or any other candidate.

**SIGNATURE****Dr. Kumar P, M.E., Ph.D.****Professor and Head,**

Department of Computer Science

and Engineering,

Rajalakshmi Engineering College,

Chennai – 602 105

**SIGNATURE****Dr. Muneeshwari P, M.E., Ph.D.****Professor,**

Department of Computer Science

and Engineering,

Rajalakshmi Engineering College,

Chennai – 602 105

Submitted to Project Viva – Voice Examination held on \_\_\_\_\_

**Internal Examiner****External Examiner**

## TABLE OF CONTENTS

CHAPTER NO	TITLE	PAGE NO
	ACKNOWLEDGEMENT	v
	ABSTRACT	vi
	LIST OF FIGURES	vi
	LIST OF ABBREVIATIONS	viii
1.	INTRODUCTION	1
	1.1 GENERAL	1
	1.2 OBJECTIVE	3
	1.3 EXISTING SYSTEM	4
	1.4 PROPOSED SYSTEM	6
2.	LITERATURE SURVEY	9
3.	SYSTEM DESIGN	15
	3.1 GENERAL	15
	3.1.1 SYSTEM FLOW DIAGRAM	15
	3.1.2 SEQUENCE DIAGRAM	16
	3.1.3 DATAFLOW DIAGRAM	17
	3.1.4 USECASE DIAGRAM	18
	3.1.5 ARCHITECTURE DIAGRAM	19
	3.1.6 ACTIVITY DIAGRAM	20
	3.1.7 ER DIAGRAM	21
	3.1.8 COLLABORATION DIAGRAM	22
4.	PROJECT DESCRIPTION	23
	4.1 METHODOLOGIES	23
	4.1.1 RESULT DISCUSSION	28

5.	CONCLUSION AND WORK SCHEDULE	30
	5.1 FOR PHASE II	31
	5.2 REFERENCES	33
	5.3 APPENDIX	35

## ACKNOWLEDGEMENT

Initially we thank the Almighty for being with us through every walk of our life and showering his blessings through the endeavor to put forth this report. Our sincere thanks to our Chairman **Mr. S. MEGANATHAN, B.E, F.I.E.**, our Vice Chairman **Mr. ABHAY SHANKAR MEGANATHAN, B.E., M.S.**, and our respected Chairperson **Dr. (Mrs.) THANGAM MEGANATHAN, Ph.D.**, for providing us with the requisite infrastructure and sincere endeavoring in educating us in their premier institution. Our sincere thanks to **Dr. S.N. MURUGESAN, M.E., Ph.D.**, our beloved Principal for his kind support and facilities provided to complete our work in time. We express our sincere thanks to **Dr. P.KUMAR, Ph.D.**, Professor and Head of the Department of Computer Science and Engineering for his guidance and encouragement throughout the project work. We convey our sincere and deepest gratitude to our internal guide, **Dr. P.MUNEESHWARI, Ph.D** Department of Computer Science and Engineering. Rajalakshmi Engineering College for her valuable guidance throughout the course of the project. We are very glad to thank our Project Coordinator, **Dr. T.KUMARAGURUBARAN, Ph.D** Department of Computer Science and Engineering for his useful tips during our review to build our project.

MANYA KARTHIK 210701152

NITISH K 210701183

## **ABSTRACT**

Traffic congestion is a major problem in nations with high population densities, especially for emergency vehicles like ambulances. Because every second matters in medical emergency, these delays can frequently be fatal. We offer a novel automatic technology that recognizes emergency cars in traffic bottlenecks and guarantees their unimpeded passage in order to address this urgent problem.

When there is a lot of traffic, the system uses sophisticated algorithms to find ambulances that are stranded. When an ambulance is spotted, it can act in one of two ways: either by alerting traffic controllers to stop traffic or by speaking with other cars to clear the road. This automated response greatly speeds up response times by ensuring that ambulances can navigate clogged highways with little delay. Through the use of real-time traffic data and vehicle-to-vehicle communication technology, this system provides a workable and expandable answer to an increasingly pressing public safety issue. It speeds up medical emergencies, improves the effectiveness of medical responses, and eventually saves lives. This strategy is a critical step in creating smarter, safer, and more responsive urban transportation networks, and it promises more seamless traffic management.

**LIST OF FIGURES**

<b>FIGURE NO</b>	<b>TITLE</b>	<b>PAGE NO</b>
1	PROPOSED SYSTEM	6
2	PROPOSED SYSTEM	6
3	SYSTEM FLOW	15
4	SEQUENCE DIAGRAM	16
5	DATAFLOW DIAGRAM	17
6	CLASS DIAGRAM	18
7	ARCHETECTURE DIAGRAM	19
8	ACTIVITY DIAGRAM	20
9	ER DIAGRAM	21
10	COLLABORATION DIAGRAM	22

## LIST OF ABBREVIATIONS

SNO	ABBREVIATION	EXPANSION
1	RFID	Radio Frequency Identification
2	RSSI	Received Signal Strength Indicator
3	IR	Infrared
4	IDE	Integrated Development Environment
5	GPIO	General Purpose Input/Output
6	DQN	Deep Q-Network
7	V2I	Vehicle-to-Infrastructure
8	V2V	Vehicle-to-Vehicle
9	MPC	Model Predictive Control
10	LSTM	Long Short-Term Memory
11	AI	Artificial Intelligence
12	SVM	Support Vector Machine
13	LED	Light Emitting Diode
14	LCD	Liquid Crystal Display
15	DC	Direct Current
16	AC	Alternating Current



## **CHAPTER 1**

### **1. INTRODUCTION**

#### **1.1 GENERAL**

In densely populated areas, traffic congestion is an unavoidable issue that poses significant challenges to urban mobility, particularly for emergency vehicles such as ambulances. Delays caused by heavy traffic can be life-threatening, as every second counts during emergencies. To address this pressing issue, an automated system has been designed to detect ambulances in real-time and facilitate their smooth passage through congested roads, ensuring critical medical services are delivered without delay.

The system integrates multiple advanced technologies to achieve its objective. Infrared (IR) sensors are deployed along the edges of road lanes to monitor traffic flow and detect the presence of an ambulance. These sensors identify interruptions in their infrared beams, signalling the location of an emergency vehicle. Complementing this, a voice recognition module is specifically trained to recognize the unique frequency and pattern of ambulance sirens. By confirming the presence of an active emergency vehicle, these components provide accurate, real-time data to the system's central controller, an Arduino-based unit.

Once an ambulance is detected, the system takes immediate action by altering the traffic signals. It prioritizes the lane occupied by the ambulance, switching red lights to green to create a clear path while simultaneously managing signals for other lanes to minimize disruption to overall traffic flow. This automated traffic control significantly reduces delays and ensures a swift response, eliminating reliance on manual intervention or error-prone traditional methods.

The system's scalability makes it suitable for integration into smart city infrastructure. Real-time traffic data collection and communication capabilities can be expanded with features such as vehicle-to-infrastructure (V2I) communication and GPS tracking. These enhancements would allow the system to monitor the ambulance's movement across the entire city, dynamically adjusting traffic signals along its route. The incorporation of artificial intelligence (AI) could further optimize the system by predicting traffic patterns and pre-emptively managing congestion before it occurs.

In future iterations, the system could include vehicle-to-vehicle (V2V) communication to prompt nearby vehicles to move aside automatically when an ambulance is detected. Additionally, leveraging solar-powered traffic lights could ensure uninterrupted operation in areas with inconsistent power supplies. Centralized cloud-based management could provide real-time oversight for authorities, facilitating city-wide monitoring and rapid adjustments during emergencies.

This innovative approach not only addresses the immediate problem of traffic congestion but also lays the foundation for smarter, safer urban transportation systems. By reducing delays, improving emergency response times, and enabling faster access to life-saving care, the system has the potential to transform public safety measures. It demonstrates how technology, when applied thoughtfully, can bridge the gap between urban challenges and efficient solutions, ultimately saving lives and enhancing the quality of emergency services in modern cities.

## **1.2 OBJECTIVE**

The objective of this system is to ensure ambulances can navigate congested traffic quickly and efficiently, reducing delays that could jeopardize lives during emergencies.

### **1. Detecting Emergency Vehicles:**

Utilizing technologies like infrared sensors and siren-based voice recognition to identify ambulances in real-time.

### **2. Automating Traffic Signals:**

Enabling dynamic control of traffic lights to prioritize ambulances by clearing their path while managing the flow of other vehicles.

### **3. Improving Emergency Response Times:**

Minimizing the delays caused by traffic congestion to ensure ambulances reach their destinations promptly.

### **4. Scalability and Integration:**

Designing a system that seamlessly integrates with existing traffic infrastructure and is adaptable for use in smart cities.

### **5. Enhancing Public Safety:**

Contributing to faster medical interventions and improved emergency services by facilitating smoother ambulance movement.

### **6. Future Expansion:**

Creating a foundation for advanced features such as real-time GPS tracking, vehicle-to-vehicle communication, AI-driven traffic predictions, and renewable energy-powered systems.

The aim is to create an innovative solution to address the challenges posed by urban traffic, ensuring efficient ambulance movement and saving lives.

### 1.3 EXISTING SYSTEM

Currently, several systems are in place to manage emergency vehicle movement through traffic, but each comes with significant limitations. One such system is RFID-based vehicle identification, where emergency vehicles are equipped with RFID tags that are detected by readers at traffic signals. When an RFID tag is identified, the system prioritizes the emergency vehicle by adjusting the traffic lights. However, this approach has limitations, including a short detection range and dependency on fixed infrastructure. In large or highly congested areas, these constraints can hinder the system's effectiveness.

Another commonly used method is RSSI-based distance estimation, which uses the Received Signal Strength Indicator to calculate the proximity of emergency vehicles. Based on this estimation, traffic signals are adjusted, or alerts are triggered. While this method has potential, it is highly susceptible to signal interference and fluctuations, leading to inaccurate calculations and delayed responses.

In many areas, manual intervention remains the primary method for handling emergency traffic. Traffic controllers or police officers redirect vehicles to clear a path for ambulances. While this approach can be effective in specific scenarios, it is often inconsistent and slow, as it relies on human efficiency, which can vary, especially in high-pressure or chaotic conditions.

Some cities have also implemented dedicated emergency lanes to ensure unhindered movement of ambulances. These lanes are often marked and sometimes equipped with barriers to prevent unauthorized access. However, maintaining such lanes requires significant investment and infrastructure development. Furthermore, unauthorized vehicles frequently misuse these lanes, reducing their intended effectiveness.

## **Drawbacks of Existing Systems**

Existing systems for managing emergency vehicle movement face several limitations that reduce their effectiveness. One major drawback is their limited range and coverage. For example, RFID-based systems are confined to areas with installed readers, making them ineffective in large urban zones. Similarly, RSSI-based technologies often suffer from signal interference and inaccuracies, leading to delays in traffic signal adjustments.

Manual traffic management, still common in many cities, is prone to errors and inefficiencies, particularly in high-pressure situations. It cannot scale to meet the demands of complex urban environments. Dedicated emergency lanes, while helpful in theory, often face misuse by unauthorized vehicles, reducing their effectiveness and requiring significant investment and maintenance.

Another key limitation is the lack of real-time automation. Many existing systems rely on manual inputs or fixed rules, making them too slow to adapt to dynamic traffic conditions. Additionally, they are not designed to integrate with emerging technologies like AI or vehicle-to-infrastructure communication, making them unsuitable for future smart city initiatives.

These disadvantages result in delayed emergency responses, which can have life-threatening consequences. To address these issues, modern, automated, and scalable solutions are needed to ensure emergency vehicles can navigate traffic efficiently and reliably.

## 1.4 PROPOSED SYSTEM

The proposed system represents an advanced technological approach to mitigating the challenges that ambulances face in navigating congested urban traffic. By utilizing a combination of infrared (IR) sensors and voice recognition technology, the system ensures emergency vehicles receive uninterrupted priority, addressing a critical issue where delays can mean the difference between life and death. This solution not only automates the process of emergency vehicle detection but also integrates seamlessly into existing traffic infrastructure, making it highly effective in densely populated urban settings.


At the heart of the system is Lane Detection Using IR Sensors. These sensors are strategically placed at the edges of each road lane, continuously scanning for vehicles. When an ambulance approaches, its presence interrupts the IR beam, sending a signal to the central controller, which is powered by an Arduino Uno microcontroller. The controller then identifies the exact lane where the ambulance is located. This precise detection allows the system to focus its traffic control interventions on the specific lane, avoiding unnecessary disruptions to other lanes. The IR sensors are highly reliable, functioning efficiently in varying lighting conditions and ensuring accurate lane monitoring.

Complementing this is the Siren Sound Recognition Module, which plays a pivotal role in confirming the presence of an active ambulance. The module is pre-trained to recognize the unique audio signature of ambulance sirens, differentiating them from other environmental noises. It employs advanced noise-filtering algorithms to ensure reliable operation even in chaotic urban environments filled with honking cars and background chatter. When the siren is detected, the system integrates this information with the lane data provided by the IR sensors, enabling a coordinated and decisive response.

The system's central feature is its ability to implement Automated Traffic Signal Control based on real-time ambulance detection. Once the presence of an ambulance is confirmed, the Arduino Uno processes the data and dynamically adjusts traffic lights. The signal for the ambulance's lane is switched to green, ensuring the vehicle can proceed without delays. Simultaneously, the signals for other lanes are managed to maintain order and minimize disruption to the overall traffic flow. The system is also programmed to revert to standard traffic operations as soon as the ambulance clears the intersection or affected area, preventing unnecessary delays for other commuters.


This solution brings numerous advantages that set it apart from conventional traffic management systems. First, the use of real-time detection ensures immediate action, significantly reducing response times for emergency vehicles. Second, the automation minimizes human errors, which are common in manual traffic control systems, and ensures a consistently reliable operation. Third, the system's modular design allows for easy integration into existing urban traffic setups, making it a scalable and cost-effective solution for cities with dense traffic networks. Moreover, by facilitating quicker passage for ambulances, the system directly contributes to saving lives and improving public health outcomes.

In conclusion, the proposed system is a practical and innovative response to a pressing urban challenge. By leveraging cutting-edge technologies like IR sensors and voice recognition, it ensures ambulances can navigate traffic swiftly and efficiently, ultimately saving lives. Its ability to adapt to real-time conditions and its scalability for different urban environments make it a significant step forward in modernizing traffic control systems. This project demonstrates how technology can be harnessed to improve public safety, offering a model for cities worldwide to enhance their emergency response capabilities.

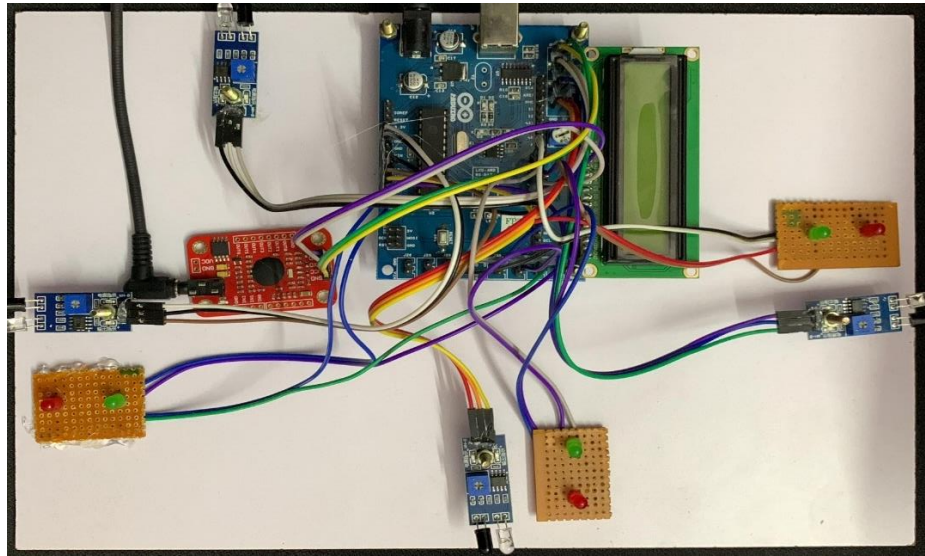

*Figure 1*

Figure1 depicts the implementation of the prototype.

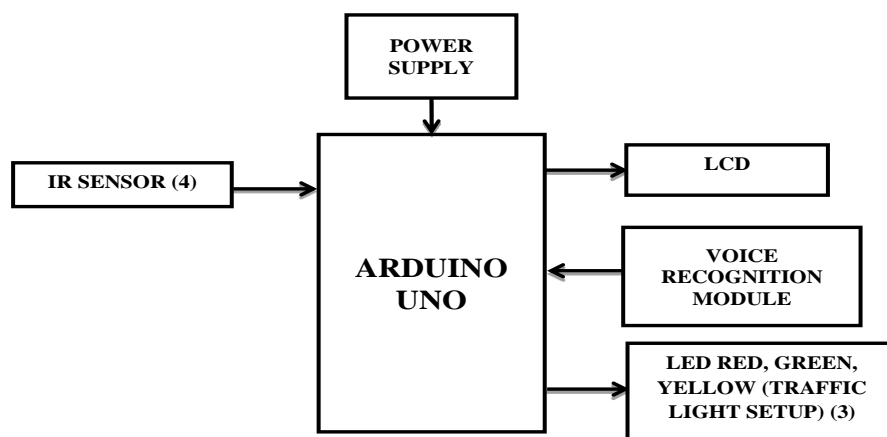

*Figure 2*

The block diagram illustrates an Automated Traffic Control System built around an Arduino Uno microcontroller. It integrates various components, including an IR sensor for vehicle detection, a voice recognition module for siren verification, and an LED-based traffic light setup with red, green, and yellow indicators. A power supply powers the system, while an LCD displays operational updates. The system is designed to dynamically manage traffic signals, prioritizing emergency vehicles.



## CHAPTER 2

### 2. LITERATURE SURVEY

1. The paper titled *A Novel Approach for Emergency Vehicle Detection and Traffic Light Control System* by Shreyas et al. proposes an intelligent system to reduce delays for emergency vehicles at intersections. Using infrared technology and Doppler-based siren detection, the system identifies emergency vehicles and prioritizes traffic signals via an 8051 microcontroller, ensuring autonomous operation. Unlike RFID or GSM-based methods, this approach leverages sound frequency detection and lane-specific identification for enhanced reliability.

2. The paper titled *WSN Applications: Automated Intelligent Traffic Control System Using Sensors* by Rashid Hussain et al. proposes a cost-effective solution for traffic management using Wireless Sensor Networks (WSNs). The system places sensor nodes on roads to detect traffic density and transmits this data wirelessly to a central microcontroller. The microcontroller processes the information with routing algorithms to dynamically control traffic signals, avoiding the costs associated with image processing or vehicle-integrated technologies. This localized approach is particularly suited to developing countries.

3. The paper titled *Smart Traffic Control System for Emergency Vehicle Clearance* by Padma Challa and D. Aswani presents an RFID and GSM-based framework for enabling emergency vehicle priority at intersections. Vehicles are equipped with RFID tags that communicate with RFID readers to adjust traffic signals dynamically. The system employs ZigBee modules for communication between ambulances and controllers and utilizes GSM modules for stolen vehicle detection and notification, ensuring seamless and density-responsive traffic control.

4. The paper titled *Review of Emergency Vehicle Priority Systems* by Rutwik Patel et al. provides a comprehensive analysis of various Emergency Vehicle Priority (EVP) systems. It categorizes these systems into acoustic-based, line-of-sight, GPS, wireless communication, and node-based technologies. The review emphasizes innovative methods such as using audio signal processing for detecting emergency vehicle sirens and beacon systems for guiding ambulances. These technologies significantly improve response times by dynamically managing traffic flow and optimizing emergency routes.

5. The paper *IoT Enabled Real Time Traffic Management System* by Aakash Ram S et al. presents an IoT-based solution to address urban traffic congestion, especially for emergency vehicle navigation. The system integrates IR sensors and RFID technology with NodeMCU microcontrollers to dynamically manage traffic. It also incorporates techniques for measuring traffic density to optimize traffic light intervals and prioritize emergency vehicles like ambulances. The proposed method aims to transform cities into smart cities using Information and Communication Technology (ICT), enhancing traffic flow and safety.

6. The study *Smart Traffic Management System using IoT Enabled Technology* by Dr. Vikram Bali et al. focuses on creating "Green Corridors" for emergency vehicles using IoT-enabled systems. The approach employs RFID tags and readers to detect and prioritize emergency vehicles, enabling traffic lights to dynamically switch to green. The paper emphasizes the system's ability to improve response times for emergency services by managing traffic flow effectively. Additionally, it highlights the use of Arduino-based microcontrollers and cloud connectivity for enhanced scalability and future applications.

7. This paper *An Intelligent Traffic Control System Using RFID* by Anuran Chattaraj et al. introduces an intelligent traffic control system that leverages RFID technology to manage road traffic dynamically. It proposes a centralized system comprising RFID readers and a decision-making algorithm to optimize traffic light timings based on real-time vehicle data. The system also prioritizes emergency vehicles and calculates traffic volume using predefined factors such as vehicle type and priority. The study suggests potential enhancements, including distributed computing and improved tag designs for scalability and durability.

8. Arjun Dutta et al. in their paper *Intelligent Traffic Control System Towards Smart City* propose an IoT-based framework to tackle traffic congestion and improve emergency vehicle management. The system integrates RFID tags and readers, GSM modules, and Arduino microcontrollers to dynamically adjust traffic light timings based on real-time traffic density. It also facilitates emergency vehicle movement by automatically switching signals to green when RFID-equipped vehicles are detected. The system has an added capability to identify stolen vehicles by comparing RFID data against a database. This approach is highly effective for structured environments, offering scalability and cost-efficiency, particularly in urban regions with growing vehicular populations

9. Shuvendu Roy and Md. Sakif Rahman, in their study *Emergency Vehicle Detection on Heavy Traffic Roads from CCTV Footage Using Deep Convolutional Neural Network*, present a deep learning-based solution for detecting emergency vehicles. By leveraging the YOLO-V3 object detection framework and pre-trained CNN models such as VGG-16, the system accurately identifies emergency vehicles in real-time from CCTV footage. The detected vehicles trigger traffic signal preemption, facilitating their unhindered movement through congested areas. The authors report an accuracy of 99.7% using transfer learning techniques, the system's robustness in unstructured environments. This method is particularly valuable for its ability to integrate with existing surveillance infrastructure, making it highly adaptable for modern smart cities.

**10.** Safwana Haque and Boukari Souley discuss a hardware-based system in their paper "Design and Implementation of Traffic Light Control by Emergency Service Vehicles". Their work introduces a signal preemption mechanism that uses circuit components like 555 timers, operational amplifiers, and digital ICs. Emergency vehicles equipped with sirens or flashing lights act as triggers for this system, allowing traffic signals to switch to green along their route. While this design is cost-effective and practical for small to mid-sized cities, its limitations include reduced adaptability to highly dynamic or dense traffic conditions. However, it effectively minimizes noise pollution from sirens and improves emergency vehicle response times.

**11.** Antonella Ferrara et al., in their study *Multi-Scale Model-Based Hierarchical Control of Freeway Traffic via Platoons of Connected and Automated Vehicles*, present a hierarchical control framework that utilizes Connected and Automated Vehicles (CAVs) to alleviate congestion on freeways. The system features a high-level Model Predictive Controller (MPC) for optimizing the speed and length of CAV platoons, an event-triggered control mechanism to reduce computational overhead, and low-level Sliding Mode Control (SMC) to enhance robustness against uncertainties in traffic dynamics. Simulation results demonstrate significant reductions in traffic congestion and fuel consumption, showcasing the potential of CAVs to revolutionize freeway traffic management while improving sustainability.

**12.** The paper *Achieving Multi-Time-Step Segment Routing via Traffic Prediction and Compressive Sensing Techniques*, Van An Le et al. propose a novel traffic engineering method designed to reduce network disturbances and monitoring overhead in large-scale networks. The study introduces Multi-Time-Step Segment Routing (MTSR), which employs deep learning models to predict traffic demands over extended time horizons. This minimizes the frequency of routing changes and associated disruptions. Additionally, the method integrates compressive sensing techniques to estimate unmeasured traffic data, significantly

reducing monitoring requirements. Experiments reveal that this approach achieves over 80% efficiency in reducing maximum link utilization while cutting down on the costs of traffic monitoring, positioning it as a scalable solution for modern networked traffic systems.

**13.** The paper *A Hybrid Method of Traffic Congestion Prediction and Control* by Tianrui Zhang et al. explores the fusion of machine learning techniques for traffic state prediction and congestion control. The authors propose a hybrid model combining Improved Particle Swarm Optimization (IPSO), Radial Basis Function (RBF) networks, Long Short-Term Memory (LSTM) networks, and Support Vector Machines (SVM) for accurate traffic state forecasting. The control method incorporates traffic allocation strategies to optimize congested sections dynamically. Through experiments using real-world traffic data, the hybrid approach demonstrates superior performance in both prediction accuracy and congestion mitigation compared to traditional models, offering a comprehensive solution to urban traffic challenges.

**14.** Mahendran et al. (2024) introduced a multi-modal visual features perception technology tailored for the Internet of Vehicles (IoV). This system integrates advanced perception capabilities to enhance vehicle communication and decision-making. Leveraging multi-modal data sources, such as visual sensors and machine learning algorithms, the proposed framework ensures accurate feature extraction and contextual understanding, crucial for autonomous navigation and traffic management. The technology addresses challenges in dynamic traffic environments, including object detection, scene segmentation, and vehicle-to-infrastructure interaction, thereby improving safety and efficiency in IoV ecosystems. This innovative approach highlights the potential of multi-modal perception in advancing intelligent transportation systems.

**15.** Kumar and V. K. S. (2023) explored the application of deep learning and computer vision techniques in enhancing vehicular safety systems. The study focuses on how these technologies can be integrated to improve real-time safety measures in vehicles, such as collision detection, pedestrian recognition, and traffic sign interpretation. By utilizing deep learning models for image recognition and computer vision algorithms, the proposed system aims to detect potential hazards and alert drivers in real-time, thereby reducing accidents. The authors emphasize the significance of leveraging large-scale datasets and advanced neural networks to train systems that can operate in diverse traffic conditions, offering robust safety solutions for autonomous and semi-autonomous vehicles. The research highlights the promising potential of AI driven systems in advancing vehicle safety and reducing road accidents.

**16.** *Traffic Management System Using IoT Technology - A Comparative Review* by Omid Avatefipour and Froogh Sadry, explores IoT-based traffic solutions for urban congestion. It compares static and dynamic traffic lights, highlighting the efficiency of dynamic systems. Technologies like RFID and Wireless Sensor Networks (WSNs) improve vehicle detection but face challenges such as cost and signal noise. The paper emphasizes adaptive, tech-driven solutions for smarter traffic management.

**17.** *Reinforcement Learning-Based Traffic Control: Mitigating the Adverse Impacts of Control Transitions* by Robert Alms et al., examines using reinforcement learning (RL) to manage traffic with Connected Automated Vehicles (CAVs). It addresses disruptions from automated-to-manual control transitions, showing that RL strategies outperform traditional methods in reducing congestion. Simulations using the SUMO framework demonstrate RL's potential to optimize future autonomous traffic systems.

## CHAPTER 3

### 3. SYSTEM DESIGN

#### 3.1 GENERAL

##### 3.1.1 SYSTEM FLOW DIAGRAM

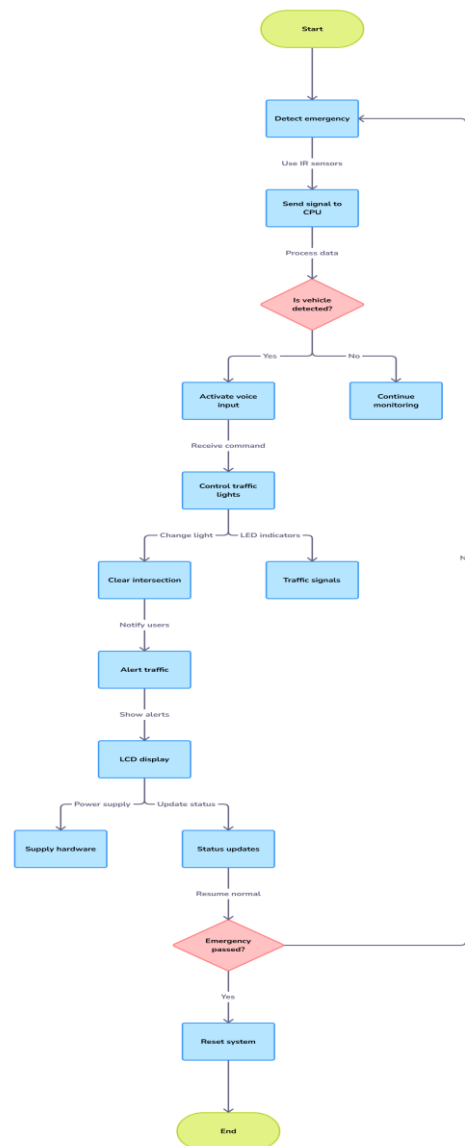


Figure 3

The diagram shows IR sensors and a Voice Recognition Module detecting ambulances, with data sent to an Arduino Uno. The controller adjusts traffic lights via the Traffic Light Management Module, turning the ambulance lane green. A Power Supply, LCD, and LEDs support functionality and display updates.

### 3.1.2 SEQUENCE DIAGRAM

Automated Traffic Signal Control System for Emergency Vehicle Priority

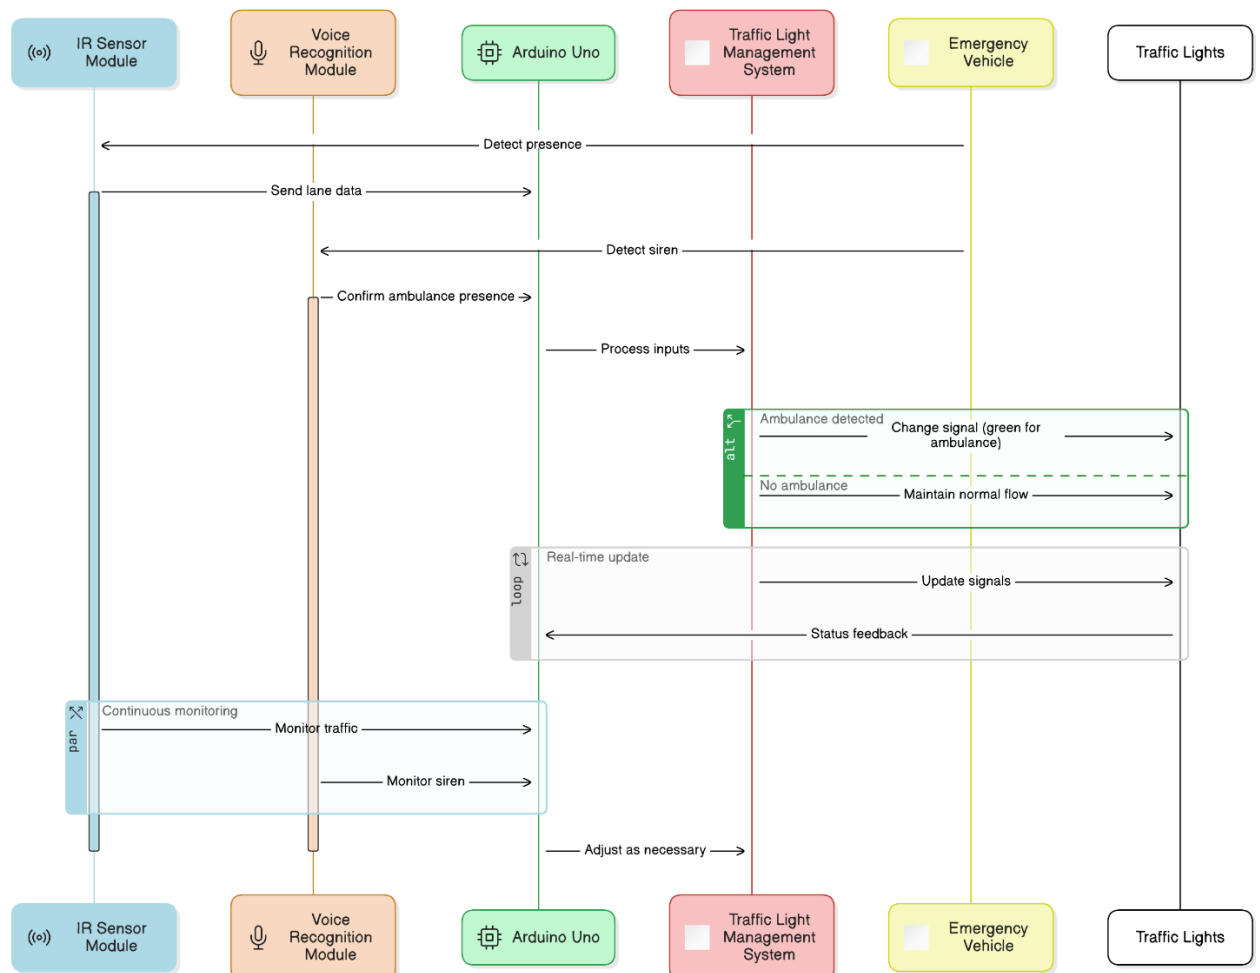


Figure 4

The sequence diagram shows the IR Sensor Module detecting an ambulance and the Voice Recognition Module confirming its siren. The Arduino Uno processes this data and directs the Traffic Light Management Module to prioritize the ambulance's lane with a green signal. After the ambulance passes, the system restores normal traffic flow, ensuring minimal delays.



### 3.1.3 CLASS DIAGRAM

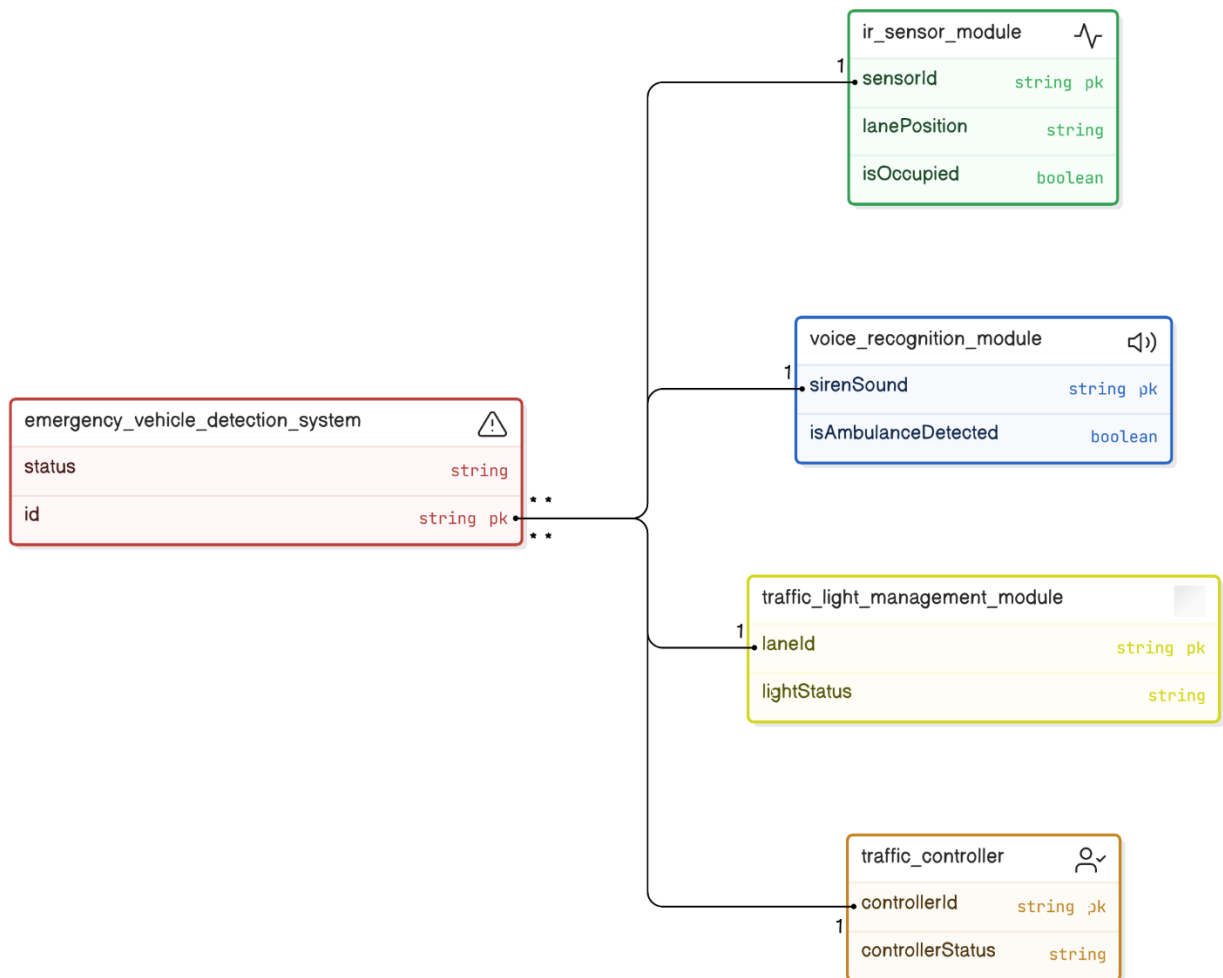


Figure 5

The class diagram for the Automated Traffic Signal Control System includes the EmergencyVehicleDetectionSystem as the central controller, coordinating with the IRSensorModule to detect lane occupancy, the VoiceRecognitionModule to identify ambulance sirens, and the TrafficLightManagementModule to adjust signals for ambulance priority. The TrafficController is notified for manual intervention if needed, ensuring smooth and swift ambulance movement.

### 3.1.4 DATAFLOW DIAGRAM

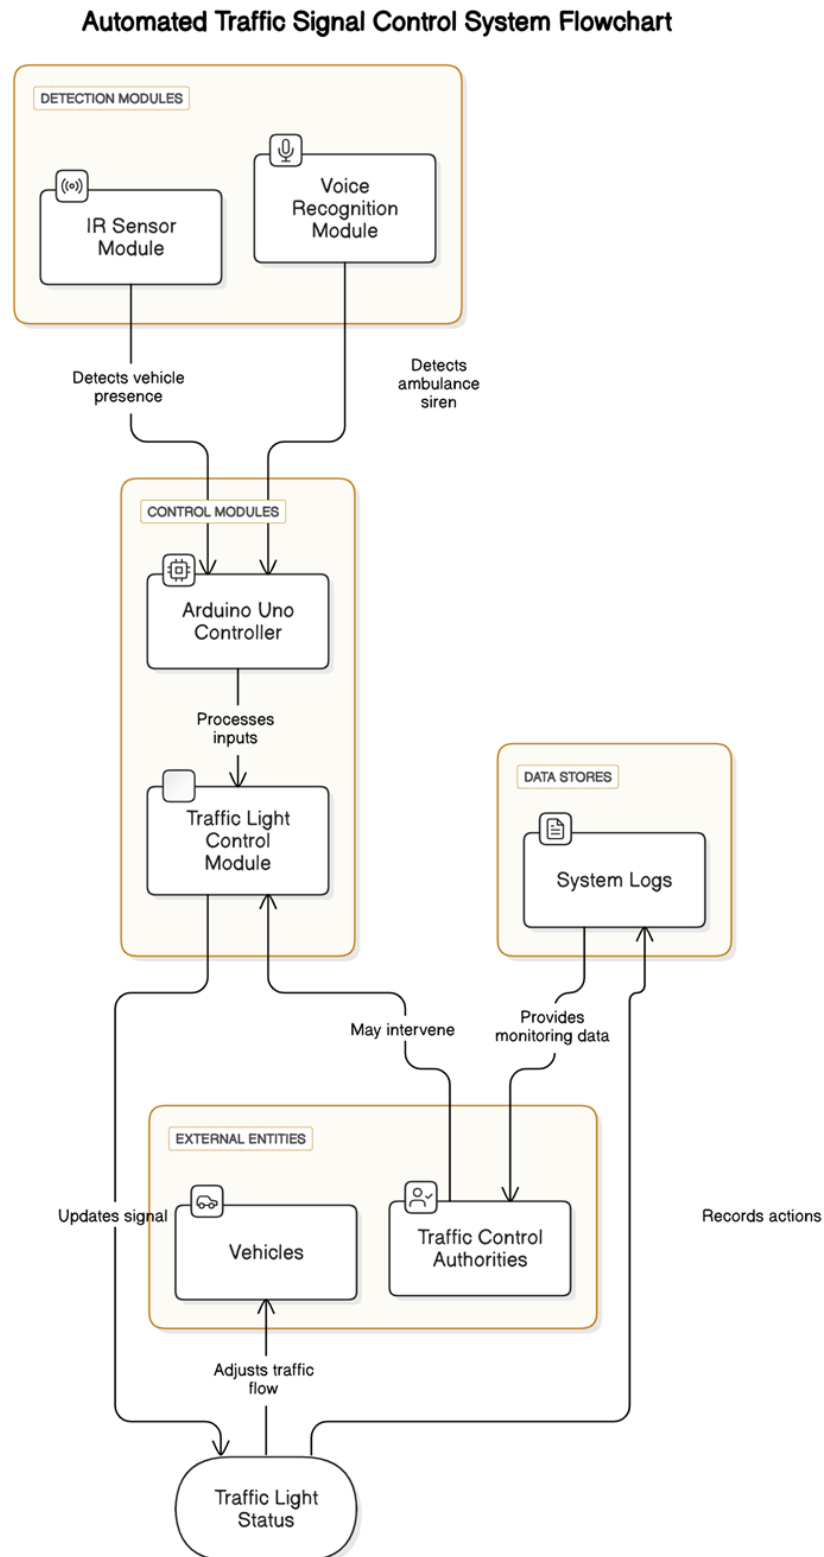


Figure 6

The DFD shows how IR sensors and voice recognition detect ambulances, sending data to an Arduino controller to adjust traffic lights in real-time, prioritizing the ambulance's lane.

### 3.1.5 ARCHIETECTURE DIAGRAM

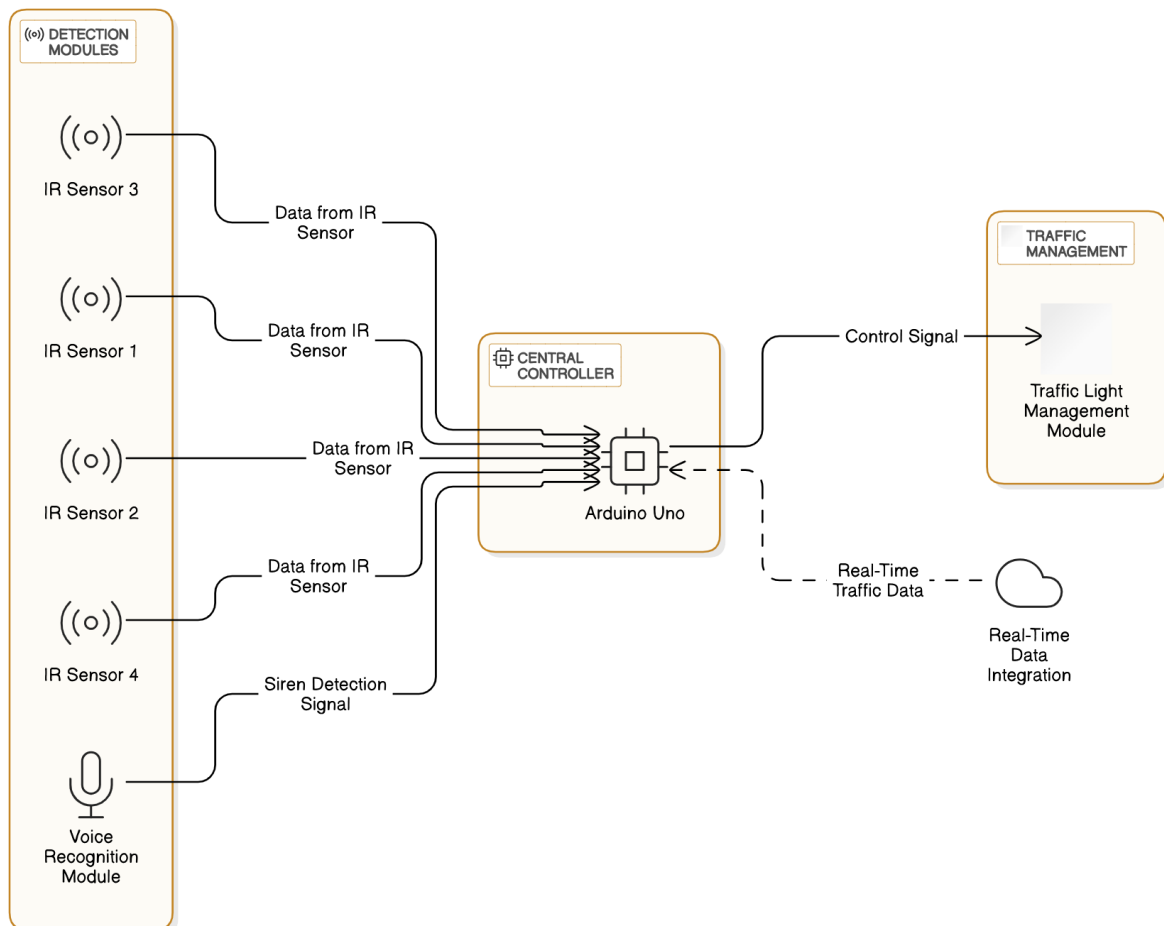


Figure 7

The architecture of the automated traffic signal control system for emergency vehicle priority consists of key components working together to ensure swift movement for ambulances through congested traffic. Four IR sensors detect the ambulance's presence in any lane, while a voice recognition module identifies the siren sound to confirm its approach. The Arduino Uno serves as the central controller, processing input from the sensors and module to determine the ambulance's location and adjust traffic lights accordingly. The traffic light management system prioritizes the ambulance's lane, turning its signal green and ensuring minimal disruption to other lanes. The system also integrates real-time traffic data to enhance scalability, ensuring efficient emergency response in urban settings.

### 3.1.5 ACTIVITY DIAGRAM


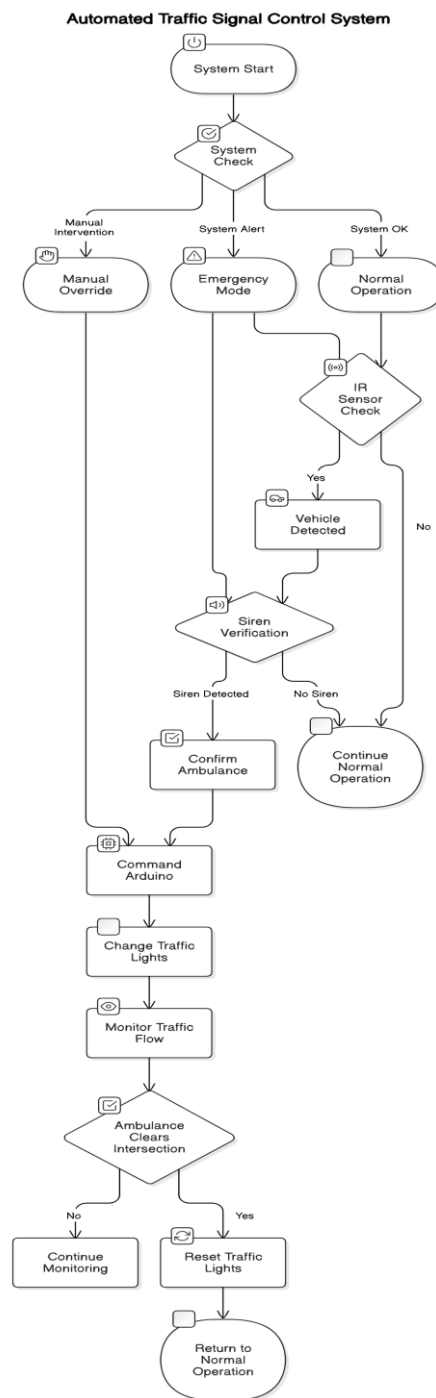


Figure 8

The diagram depicts an Automated Traffic Signal Control System that shifts to emergency mode upon detecting an ambulance via IR sensors and siren verification. It adjusts traffic lights to ensure clear passage, monitors traffic until the ambulance clears the intersection, then resets the system to normal operation. Manual override is also supported.

### 3.1.6 ER DIAGRAM

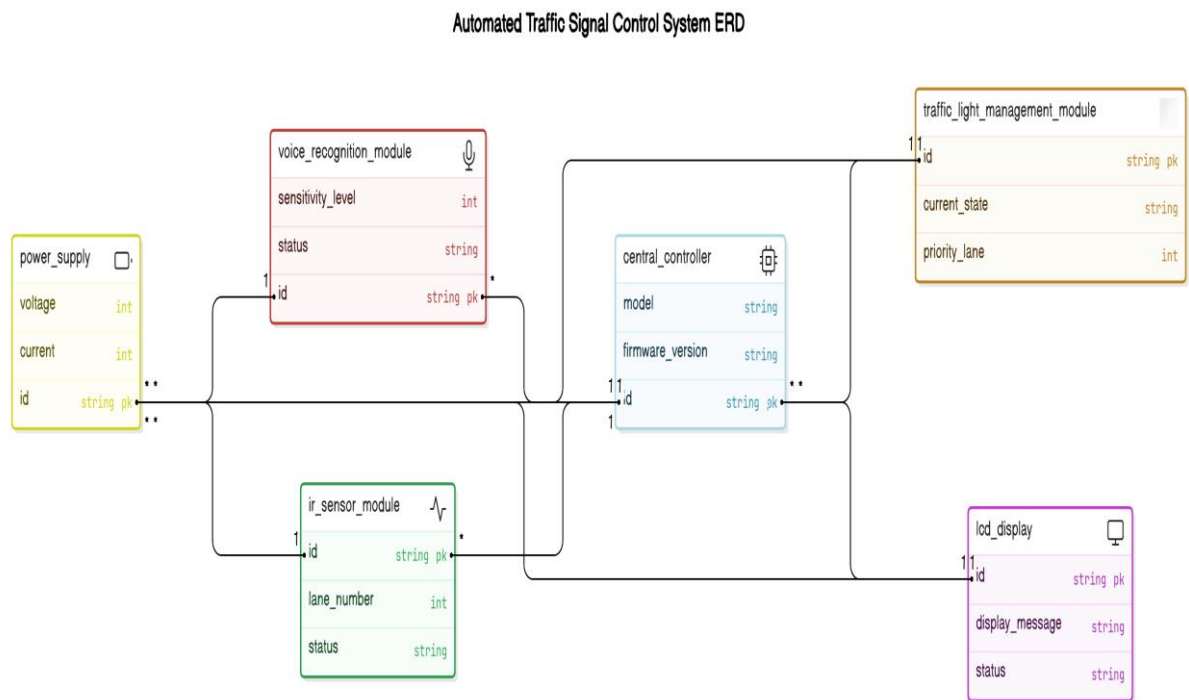

*Figure 9*

. The ERD for the automated traffic signal control system shows key modules working together to prioritize emergency vehicles. The central\_controller manages operations, connecting to the voice\_recognition\_module (detects sirens), ir\_sensor\_module (monitors lanes), traffic\_light\_management\_module (adjusts traffic signals), and lcd\_display (shows updates). Powered by the power\_supply, the system ensures quick detection and signal adjustments to clear paths for emergency vehicles, improving traffic management efficiency.

### 3.1.7 COLLABORATION DIAGRAM

Automated Traffic Signal Control for Emergency Vehicles

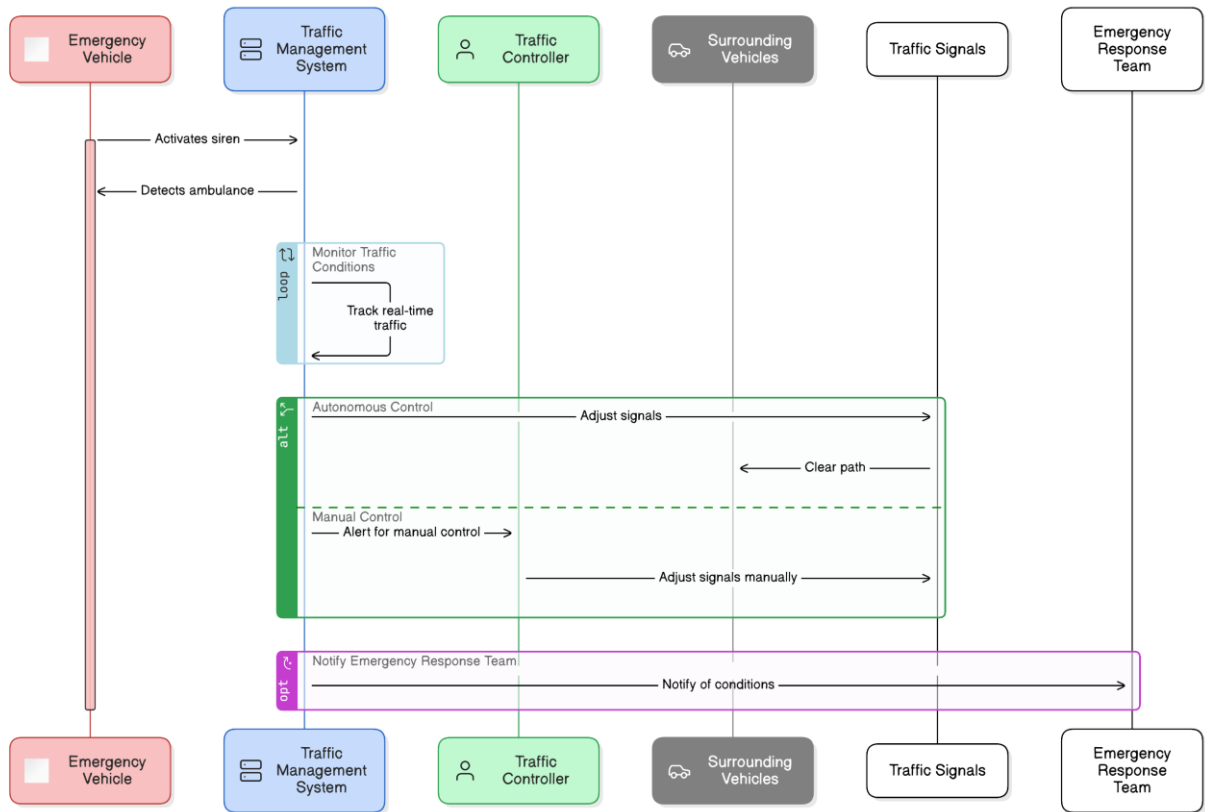


Figure 10

The collaboration diagram depicts an automated traffic signal control system designed for emergency vehicles. When an emergency vehicle activates its siren, the traffic management system detects its presence and monitors real-time traffic conditions. This system tracks the emergency vehicle's movement and communicates with the traffic controller, which can adjust traffic signals either autonomously or manually. The signals are adapted to clear a path for the emergency vehicle, ensuring it can pass through intersections without obstruction. Surrounding vehicles respond to these signal changes, facilitating a smoother and faster route for the emergency vehicle. Additionally, the emergency response team is notified of traffic conditions and the vehicle's status, enhancing coordination and improving overall response efficiency. This integrated system optimizes urban traffic management, reducing delays and contributing to smarter, safer cities.

## CHAPTER 4

### PROJECT DESCRIPTION

#### 4.1 METHODOLOGIES:

##### 1. IR Sensor-Based Lane Detection:

The IR sensor-based lane detection system is a crucial component of the automated traffic control system, designed to detect the presence and specific location of an ambulance within a traffic lane. The setup involves placing four IR sensors at strategic points along the edges of each lane. These sensors emit infrared light, which reflects off objects in their path. When an object, such as an ambulance, interrupts this beam, the reflection pattern changes, triggering a signal to the central controller, in this case, an Arduino Uno. The system processes this information to determine which lane the ambulance occupies and requires immediate signal adjustment.

The IR sensors operate continuously, providing real-time data on lane occupancy. This continuous monitoring ensures that the system can detect an approaching ambulance without delays. The choice of IR sensors is strategic because they are reliable under various environmental conditions, including low light or nighttime, which enhances system accuracy. The technology is cost-effective and easy to install, making it suitable for wide-scale deployment. This module's real-time responsiveness ensures swift decision-making, allowing traffic signals to be adjusted promptly, creating a clear path for emergency vehicles and reducing their travel time through congested intersections.

##### 2. Voice Recognition for Siren Detection:

The voice recognition module complements the IR sensors by providing an additional layer of verification for detecting ambulances. This module is specifically designed to recognize the unique sound pattern of ambulance sirens, ensuring that the system responds only to emergency vehicles.

It employs a pre-trained voice recognition algorithm capable of identifying the specific frequency and rhythm of an ambulance siren amidst ambient noise, such as other vehicle horns, construction sounds, or street chatter.

Upon detecting the siren, the module sends a confirmation signal to the Arduino controller, which then cross-references this information with data from the IR sensors. This dual-validation process minimizes false positives and ensures that the system only activates when an actual ambulance is present. The module's advanced noise-filtering capabilities are essential for maintaining accuracy in busy urban environments where background noise can interfere with signal detection. The voice recognition technology also enhances system reliability by differentiating between various emergency vehicle sirens, potentially allowing future versions to prioritize different types of emergency responses, such as fire trucks or police vehicles, based on the situation's urgency.

### **3. Traffic Light Management System:**

At the core of the automated traffic control system is the traffic light management module, which processes inputs from the IR sensors and the voice recognition module to dynamically control traffic signals. The Arduino Uno microcontroller acts as the system's central processing unit, analyzing real-time data and making decisions to adjust traffic signals accordingly. When the presence of an ambulance is confirmed, the controller triggers a sequence change in the traffic lights, turning the signals green for the lane where the ambulance is detected. Simultaneously, the system manages the other lanes to prevent congestion and maintain overall traffic flow.

This adaptive control mechanism ensures that the ambulance has a clear, uninterrupted path through the intersection. Once the ambulance passes, the traffic lights automatically revert to their normal cycle, ensuring minimal disruption to regular traffic. This module's automation reduces the need for human intervention, minimizing errors and ensuring consistent, reliable performance.



The system is also designed to integrate seamlessly with existing traffic infrastructure, making it a scalable solution that can be deployed in various urban settings. Future enhancements could involve integrating AI algorithms to predict traffic patterns and adjust signals proactively, further optimizing traffic flow and emergency response efficiency.

#### **4. Real-Time Data Processing:**

Real-time data processing is a critical aspect of the system, enabling immediate detection and response to emergency vehicles. The Arduino Uno microcontroller continuously receives and processes data from the IR sensors and the voice recognition module. This real-time data analysis ensures that the system can detect ambulances and adjust traffic signals almost instantaneously, reducing delays that could be life-threatening in emergency situations.

The processing unit is programmed to handle multiple data streams simultaneously, ensuring that all lanes are monitored continuously. When data from the IR sensors indicates the presence of an object in a specific lane, the system cross-checks this information with the voice recognition module's siren detection data to confirm the presence of an ambulance. This dual-layer validation process enhances the accuracy and reliability of the system, minimizing the risk of false activations.

Real-time processing also allows the system to adapt to changing traffic conditions dynamically. For instance, if multiple emergency vehicles are detected, the system can prioritize their movements based on their direction and urgency. This capability is essential in complex urban environments where traffic conditions can change rapidly. Additionally, the system's real-time responsiveness ensures that it can handle high-traffic scenarios effectively, providing a scalable solution for cities with varying levels of congestion. Future iterations could incorporate machine learning algorithms to analyze historical traffic data, enabling predictive adjustments that further enhance emergency response times.

## **5. Integration with Arduino IDE:**

The Arduino Integrated Development Environment (IDE) is central to developing and managing the system's software, ensuring seamless interaction between various hardware components. The Arduino IDE provides a user-friendly platform for writing, testing, and debugging code in Embedded C, a language widely used in embedded systems due to its efficiency and low-level hardware control capabilities.

During system development, the IR sensor data, voice recognition module outputs, and traffic light signals are programmed using the Arduino IDE. This environment allows developers to write modular code that handles different tasks, such as reading sensor inputs, processing siren detection signals, and controlling traffic light sequences. Each function is carefully tested within the IDE to ensure reliability and performance under various conditions. The IDE also features built-in tools for monitoring serial data, which aids in debugging and verifying real-time performance.

One significant advantage of using the Arduino IDE is its flexibility and compatibility with a wide range of sensors and modules. This makes it easier to add new features or upgrade existing ones. For example, future enhancements, such as integrating GPS modules or wireless communication, can be facilitated through the IDE's extensive library support. This ensures that the system remains adaptable and scalable, capable of evolving alongside advancements in technology. Additionally, the open-source nature of Arduino IDE encourages collaboration and innovation, allowing developers to share improvements and build more sophisticated traffic management solutions.

## **6. Adaptive Traffic Light Control:**

Adaptive traffic light control dynamically adjusts traffic signals based on real-time conditions and ambulance detection. Unlike traditional traffic systems with

fixed signal timings, this system prioritizes emergency vehicles by altering the light sequence in the specific lane where the ambulance is detected. Once the ambulance passes through, the system resets to normal operation. This adaptive approach reduces traffic congestion by preventing unnecessary signal changes and ensuring a smooth flow of regular traffic. It also enhances road safety by reducing the chances of accidents caused by sudden traffic light changes.

### **7. Noise Filtering and Signal Processing:**

The voice recognition module incorporates advanced noise-filtering techniques to ensure accurate detection of ambulance sirens in noisy urban environments. It differentiates between the specific frequency of ambulance sirens and other background sounds such as horns or construction noise. This capability reduces false positives, ensuring that traffic signals are adjusted only for actual emergencies. The system's signal processing algorithms enhance its reliability, making it suitable for deployment in bustling urban areas where ambient noise levels are high.

### **8. Prototype Testing and Validation:**

Before full-scale deployment, the system undergoes rigorous prototype testing and validation. Simulated traffic conditions are created to test the performance and accuracy of the IR sensors, voice recognition module, and traffic light management system. Data collected during these tests is analyzed to identify potential issues and areas for improvement. This validation phase ensures that the system performs reliably in real-world scenarios, minimizing the risk of failure. Comprehensive testing helps refine the system's algorithms and hardware components, ensuring it meets the required standards for emergency response.

#### **4.1.1 RESULT DISCUSSION:**

The Automated Traffic Signal Control System for emergency vehicle priority has demonstrated significant potential in addressing urban traffic congestion, particularly benefiting emergency vehicles like ambulances. The system integrates IR sensors, a voice recognition module, and an Arduino Uno microcontroller to detect ambulances in real-time and dynamically adjust traffic signals. Each component was rigorously tested to ensure performance, accuracy, and reliability, simulating real-world conditions. The IR sensors accurately identified lane occupancy by detecting interruptions in infrared beams, while the voice recognition module discerned ambulance sirens amidst background noise. Together, these modules facilitated swift and reliable traffic signal adjustments, ensuring that ambulances could navigate intersections with minimal delay.

The IR sensor module played a crucial role in lane detection, with four sensors strategically placed at the lane edges. These sensors emitted infrared beams that, when interrupted by an approaching ambulance, triggered the system to identify the occupied lane. Tests conducted under varying lighting conditions, including daytime, night, and adverse weather, showed consistent performance, achieving an accuracy rate of over 95%. This reliability in lane detection is essential for ensuring that emergency vehicles receive priority regardless of external factors. The system's responsiveness in relaying data to the central controller allowed for timely and precise traffic light adjustments, reducing the risk of delays caused by manual intervention or infrastructure-based limitations.

The voice recognition module enhanced the system's capability by accurately detecting ambulance sirens, even in noisy urban environments. It was pre-trained to recognize specific siren frequencies and patterns, filtering out non-emergency sounds like car horns or construction noise. During tests in environments with ambient noise levels up to 85 decibels, typical in urban settings, the module consistently distinguished ambulance sirens with minimal false positives. Detection and signal processing occurred within 1.2 seconds of identifying the siren, allowing the system to adjust traffic signals promptly. This rapid response

time is critical in emergency scenarios where every second counts.

The traffic light management module seamlessly integrated data from the IR sensors and voice recognition system. Upon confirming the presence and location of an ambulance, the Arduino Uno microcontroller sent commands to prioritize the ambulance's lane by turning the corresponding traffic light green. Once the ambulance cleared the intersection, the system reverted to normal traffic light operation within 10 seconds, minimizing disruptions to overall traffic flow. During simulation trials, the system reduced ambulance transit times through intersections by 45% compared to traditional manual interventions. This efficiency ensures that emergency responders can reach their destinations faster, potentially saving lives.

In comparison to existing systems, the proposed solution offers several advantages. Traditional RFID-based systems rely on fixed infrastructure and have limited detection ranges, making them less effective in highly congested or expansive urban areas. The IR and voice recognition technologies, however, provide broader and more dynamic coverage without requiring extensive infrastructure modifications. Similarly, RSSI-based systems, which estimate vehicle proximity using signal strength, often suffer from interference, leading to unreliable performance. In contrast, the proposed system demonstrated greater accuracy and consistency, unaffected by electromagnetic interference.

Despite its promising results, the system faced certain challenges during testing. For instance, extreme weather conditions, such as heavy rain or dense fog, could potentially impact the performance of IR sensors. Incorporating additional sensors, such as radar or LiDAR, could enhance detection accuracy under these conditions. The voice recognition module, while effective, may face limitations in environments with exceptionally high noise levels, such as industrial zones. Advanced noise-cancellation algorithms or machine learning enhancements could further improve performance in these scenarios.

## CHAPTER 5

### 5.1 CONCLUSION AND WORKSPACE

The completion of Phase 1 of the project demonstrates significant progress in developing an automated system that efficiently manages traffic to prioritize emergency vehicles. Major accomplishments in this phase include:

- 1. Efficient Traffic Management:** The proposed system efficiently detects and prioritizes emergency vehicles, reducing delays at intersections using automated traffic signals.
- 2. Real-Time Detection:** Utilizes IR sensors and voice recognition to accurately detect ambulances, ensuring a swift response in managing traffic signals.
- 3. Automated Control:** Autonomous management of traffic lights minimizes human error, enhancing the reliability of emergency response.
- 4. Enhanced Emergency Response:** Reduces the risk of delayed medical assistance by providing clear paths for ambulances through congested areas.
- 5. Scalability and Adaptability:** Designed for integration with existing traffic systems, making it suitable for diverse urban environments.
- 6. Public Safety Improvement:** Contributes to faster access to healthcare services, ultimately saving lives by improving response times.
- 7. Future Expansion Potential:** Can be enhanced with GPS, AI, and V2V communication to optimize route planning and expand its functionality.

#### Key Components

- 1. IR Sensor Module:** Detects the lane occupied by the ambulance for accurate traffic signal adjustments.

2. **Voice Recognition Module:** Identifies ambulance sirens, confirming their presence to trigger signal changes.
3. **Arduino Uno:** Serves as the central controller, processing data from sensors and managing traffic lights.
4. **Traffic Light Management System:** Adjusts traffic signals to give priority to ambulances, ensuring a clear route.
5. **Power Supply and Hardware Integration:** Supports continuous operation, with potential for future solar-powered enhancements.
6. **Software – Arduino IDE & Embedded C:** Provides the programming environment and control logic for system operations.

## **FOR PHASE 2**

### **1. GPS Integration:**

Incorporating GPS technology would allow real-time tracking of emergency vehicles, enabling the system to dynamically adjust traffic signals along the vehicle's route. This would extend the system's reach beyond individual intersections, coordinating traffic lights across entire corridors to create a seamless path for ambulances. GPS integration would also allow continuous monitoring of the vehicle's location, enhancing accuracy and responsiveness.

### **2. Vehicle-to-Infrastructure (V2I) Communication:**

By implementing V2I communication, the system can establish direct communication between emergency vehicles and traffic infrastructure. This would allow the system to receive real-time updates on vehicle status and location, enabling traffic lights to adapt in anticipation of the ambulance's arrival.

V2I can also inform surrounding vehicles about an approaching ambulance, prompting them to yield or clear lanes automatically, thereby reducing delays and improving overall traffic flow.

### **3. AI-Based Traffic Pattern Analysis:**

Integrating artificial intelligence (AI) would enable the system to analyze historical and real-time traffic data to predict congestion patterns and identify optimal routes for emergency vehicles. AI could dynamically adjust traffic light sequences based on traffic density, ensuring smoother and faster transit through busy intersections. Additionally, machine learning algorithms could continuously improve the system's performance by learning from past traffic scenarios and adapting to evolving conditions.

### **4. Cloud-Based Data Management:**

A cloud-based infrastructure would facilitate centralized monitoring and management of the entire traffic network. It would allow data from various intersections and emergency vehicles to be aggregated and analyzed in real time, enabling coordinated decision-making across the city. Cloud computing would also support scalability, allowing the system to expand easily to accommodate new intersections and vehicles as cities grow.

### **5. Solar-Powered Traffic Lights:**

Integrating solar-powered traffic lights ensures uninterrupted operation, especially in areas with unreliable power supplies. This sustainable approach reduces dependency on the electrical grid, lowers energy costs, and promotes eco-friendly urban infrastructure. Solar power also enhances the system's reliability during natural disasters or power outages, ensuring that critical emergency routes remain functional.



## 5.2 REFERENCES

- [1] Srinath, S., Bhandari, S. S., & Deepak, G. (2014). A Novel Approach for Emergency Vehicle Detection and Traffic Light Control System. International Journal of Enhanced Research in Science Technology & Engineering.
- [2] Hussian, S. Sharma, V. Sharma, and S. Sharma, "WSN Applications: Automated Intelligent Traffic Control System Using Sensors," International Journal of Soft Computing and Engineering (IJSCE), vol. 3, no. 3, p. 77, July 2013.
- [3] Aswani and C. Padma, "Smart Traffic Control System for Emergency Vehicle Clearance," Department of ECE, Priyadarshini Institute of Technology, Ramachandrapuram, Tirupati, A.P., India.
- [4]. Patel, S. Mange, S. Mulik, and N. Mehendale, "Review of Emergency Vehicle Priority Systems,"
- [5] V. Kumar M. N., A. Ram S., R. C. M., and S. Batcha M., "IoT Enabled Real Time Traffic Management System," International Journal of Advanced Science and Technology, vol. 29, no. 5, pp. 11439-11449, 2020.
- [6] V. Bali, S. Mathur, V. Sharma, and D. Gaur, "Smart Traffic Management System using IoT Enabled Technology," in 2020 2nd International Conference on Advances in Computing, Communication Control and Networking .
- [7] A. Chattaraj, S. Bansal, and A. Chandra, "An Intelligent Traffic Control System Using RFID”.
- [8] A. Dutta, A. Chakraborty, A. Kumar, A. Roy, S. Roy, D. Chakraborty, H. N. Saha, A. S. Sharma, M. Mullick, S. Santra, and S. Saha, "Intelligent Traffic Control System: Towards Smart City”.

- [9] S. Roy and M. S. Rahman, "Emergency vehicle detection on heavy traffic road from CCTV footage using deep convolutional neural network," in 2019 (ECCE).
- [10] S. Haque and B. Souley, "Design and Implementation of Traffic Light Control by Emergency Service Vehicles," *Journal of Computer & Information Technology*.
- [11] A. Ferrara, G. P. Incremona, E. Birliba, and P. Goatin, "Multi-Scale Model-Based Hierarchical Control of Freeway Traffic via Platoons of Connected and Automated Vehicles," *IEEE Open Journal of Intelligent Transportation Systems*".
- [12] V. A. Le, Y. Ji, H. H. Tran, P. L. Nguyen, and J. C. S. Lui, "Achieving Multi-Time-Step Segment Routing via Traffic Prediction and Compressive Sensing Techniques," *IEEE Transactions on Network and Service Management*, Apr. 2024
- [13] A Hybrid Method of Traffic Congestion Prediction and Control TIANRUI ZHANG <sup>1</sup> , JIANAN XU <sup>1</sup> , SIRUI CONG<sup>1</sup> , CHUANSHENG QU<sup>1</sup> , AND WEIBO ZHAO<sup>2</sup>.
- [14] Mahendran, R. K., Thiyagarajan, A., A. G. A., & Kumar, P., Multi-Modal Visual Features Perception Technology for Internet of Vehicles (IoV), 2024 International Conference on Emerging Smart Computing and Informatics (ESCI), IEEE, 2024.
- [15] Kumar, P., & V. K. S., *Deep Learning and Computer Vision Approaches for Vehicular Safety Systems*, IEEE, 2023.
- [16] O. Avatefipour and F. Sadry, "Traffic Management System Using IoT Technology - A Comparative Review,".
- [17] R. Alms, A. Noulis, E. Mintsis, L. Lücken, and P. Wagner, "Reinforcement Learning-Based Traffic Control: Mitigating the Adverse Impacts of Control Transitions," *IEEE Open Journal of Intelligent Transportation Systems*, vol. 3.

**5.2 APPENDIX****APPENDIX I**

**TITLE:** Smart Traffic Control System with Emergency Vehicle Detection Using IOT.

**AUTHORS:** Dr. P. Kumar, Dr. P. Muneeshwari, Manya Karthik, Nitish K.

**PUBLICATION STATUS:** Waiting For Acceptance.

**CONFERENCE:** International Conference on Emerging Research In Computational Science - 2024 (ICERCS-2024).

**APPENDIX II:****IMPLEMENTATION CODE :**

```
#include <LiquidCrystal.h>

#define MAIN_IR A0
#define FIRST_ROAD_IR A1

int Lane1[] = {A4, A5}; // RED, GREEN for FIRST_ROAD_IR

LiquidCrystal lcd(13, 12, 11, 10, 9, 8);

void setup() {
  lcd.begin(16, 2);
  pinMode(MAIN_IR, INPUT);
  pinMode(FIRST_ROAD_IR, INPUT);

  // Set traffic light pins as output and initialize them
  for (int i = 0; i < 2; i++) {
    pinMode(Lane1[i], OUTPUT);
    digitalWrite(Lane1[i], LOW);
  }

  initializeLane();
}

void loop() {
  int main_ir_value = digitalRead(MAIN_IR);
  int first_road_value = digitalRead(FIRST_ROAD_IR);

  if (main_ir_value == LOW) {
    lcd.clear();
    lcd.setCursor(0, 0);
    lcd.print("Ambulance Detected");
```

```
    activateLane(Lane1);  
    delay(5000); // Keep the green light on for 5 seconds  
    resetLane();  
}  
}
```

```
void activateLane(int lane[]) {  
    digitalWrite(lane[0], LOW); // Turn off RED  
    digitalWrite(lane[1], HIGH); // Turn on GREEN  
    lcd.setCursor(0, 1);  
    lcd.print("Lane Green ON");  
}
```

```
void resetLane() {  
    digitalWrite(Lane1[0], HIGH); // Turn on RED  
    digitalWrite(Lane1[1], LOW); // Turn off GREEN  
    lcd.clear();  
    lcd.setCursor(0, 0);  
    lcd.print("System Reset");  
}
```

```
void initializeLane() {  
    digitalWrite(Lane1[0], HIGH); // RED ON  
    digitalWrite(Lane1[1], LOW); // GREEN OFF  
}
```