

STANDARD ARRIVAL CHART-INSTRUMENT

VAR2° W

ATIS 128.45
AP01 120.25(127.9)
AP02 119.15(125.025)
AP03 124.2(125.025)
AP04 119.45(127.9)
TWR 118.1(130.0)

ZLLL LANZHOU/Zhongchuan
RNAV RWY18

TL 4800
TA 4200
4500(QNH≥1031hPa)
3900(QNH≤979hPa)

1. Radar REQUIRED
2. RNAV 1
3. GNSS REQUIRED


BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM



NOT TO SCALE




LANZHOU
114.3 ZGC
CH 90X
N36 30.8E103 37.4




ZHONGHE
198 YM
N36 14.1E103 48.1

JINGTAI
114.9 JTA
CH 96X
N37 11.8E104 04.8



Note: LL006 is fly over when used for holding.

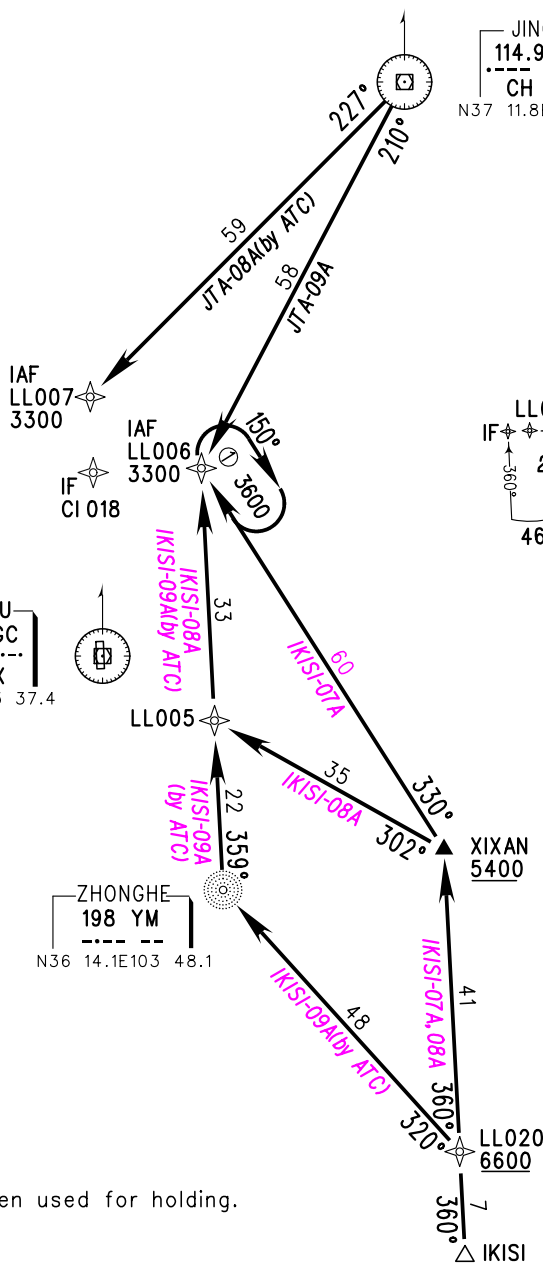

Changes: APP FREQ, procedure.