

AERODROME CHART



ATIS 128.45
 TWR 118.3(118.85, 130.0)
 GND 121.6
 GND 121.8(for Delivery)

ZHCC ZHENGZHOU/Xinzheng

N34° 31.1'E113° 50.4' ELEV 151m

RWY	Direction	Bearing strength(PCN)
12	116°	M, L, stand Nr.72-83: 67/R/B/W/T Deicing apron: 72/R/B/W/T RWY, other aprons, other TWYs: 74/R/B/W/T Stand Nr.70,71: 98/R/B/W/T
30	296°	

BEARINGS ARE MAGNETIC
 ALTITUDES, DISTANCES,
 ELEVATIONS AND HEIGHTS
 IN METERS

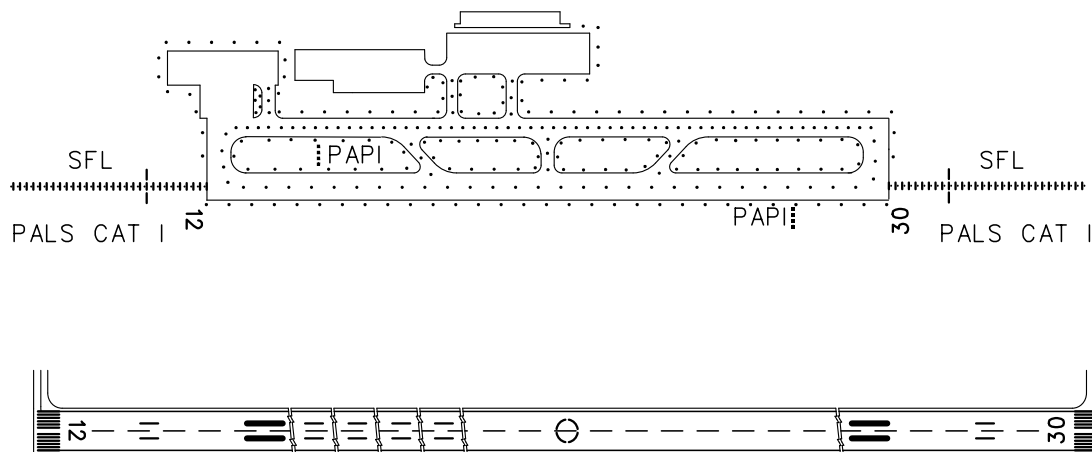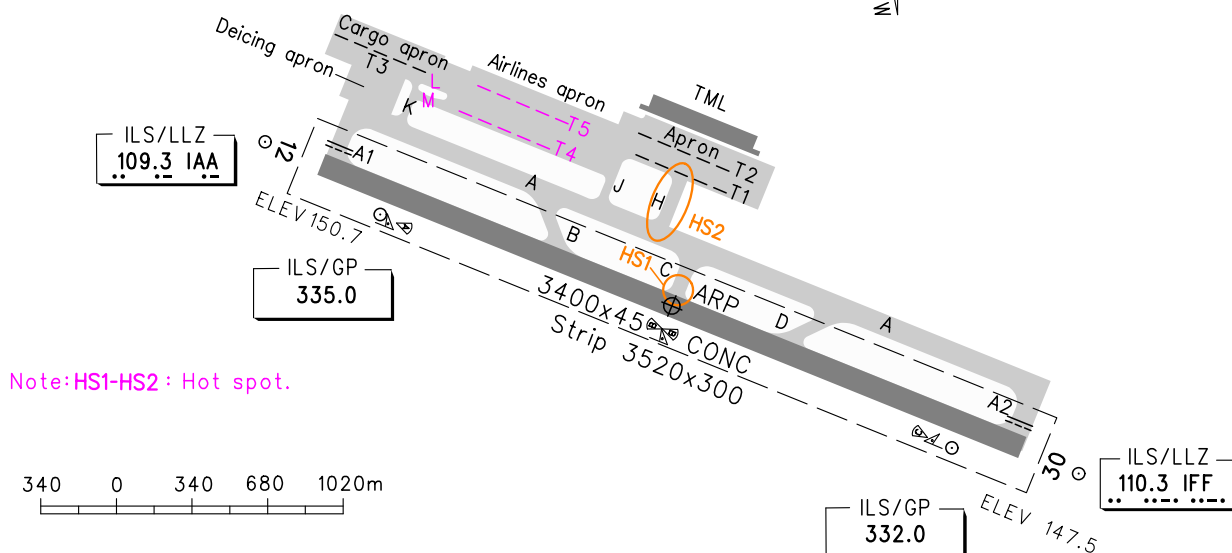

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY12	RWY30
12/ 30	2 TURB ENG or 3&4 ENG	RVR400	RVR500	PALS CAT I REDL RCLL PAPI SFL	PALS CAT I REDL RCLL PAPI SFL
	Other	VIS1600			

Changes: T4, T5, TWY M, L, new stands, HS3 and TWY G withdrawn, PCN.