


AERODROME CHART

Delivery 121.9(DCL ABVL)

RWY	Direction	Bearing strength(PCN)		BEARINGS ARE MAGNETIC ALTITUDES, DISTANCES,
07	071°	TWYs T(BTN L&K),T(A6&east cargo apron),K(south of T), J,A5-A6,KA(K&J),KB(K&J)	83/R/B/W/T	ELEVATIONS AND HEIGHTS IN METERS
		RWY,TWYs A(BTN L&F),F,K(BTN A&RWY),L,A7-A9	80/F/B/W/T	
		TWYs A1-A4	78/F/B/W/T	
		TWY T(BTN stand Nr.141&A6)	76/R/B/W/T	
25	251°	TWYs H,KA,KB	74/R/B/W/T	
		TWYs A10,K(BTN A&T),T(BTN K&stand Nr.141),	70/R/B/W/T	
		TWY A(east of F)	61/R/B/W/T	
		TWYs T1-T4	52/R/A/W/T	

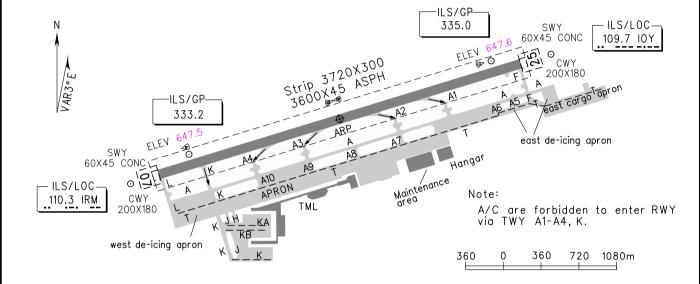





	TAKE-OFF MINIM	MA(WITH RELIABLE	LIGHTS					
RWY	ACFT Type	REDL	NIL(Day only)	RWY07	RWY25			
07/	2 TURB ENG or 3&4 ENG	RVR400	RVR500	PALS CAT I	PALS CAT II REDL PAPI			
25	Other	VIS1600		REDL PAPI RCLL	RCLL SFL TDZL			
Changes: THR ELEV, RWY direction.								