

STANDARD DEPARTURE  
CHART-INSTRUMENT

D-ATIS 127.25  
TWR(N) 123.65(118.75)  
TWR(S) 118.3(118.75)


APP 125.55(119.15) AP01  
126.05(119.15) AP02  
120.05(124.65) AP03

ZSHC HANGZHOU/Xiaoshan  
RNAV RWY06

- 1. RNAV1
- 2. GNSS REQUIRED
- 3. RADAR REQUIRED

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM

- Note:
- 1. The climb gradient of take-off is not less than 4.4%.
  - 2. Obtain ATC clearance, can use TAP-63K, TAP-65K, AND-63K, REM-65K, ELN-63K, UGA-63K
  - 3. Turning before DER is forbidden.
  - 4. The speed limit of AND is not for AND-61K.  
The speed limit of ADBAS is not for TAP-63K.

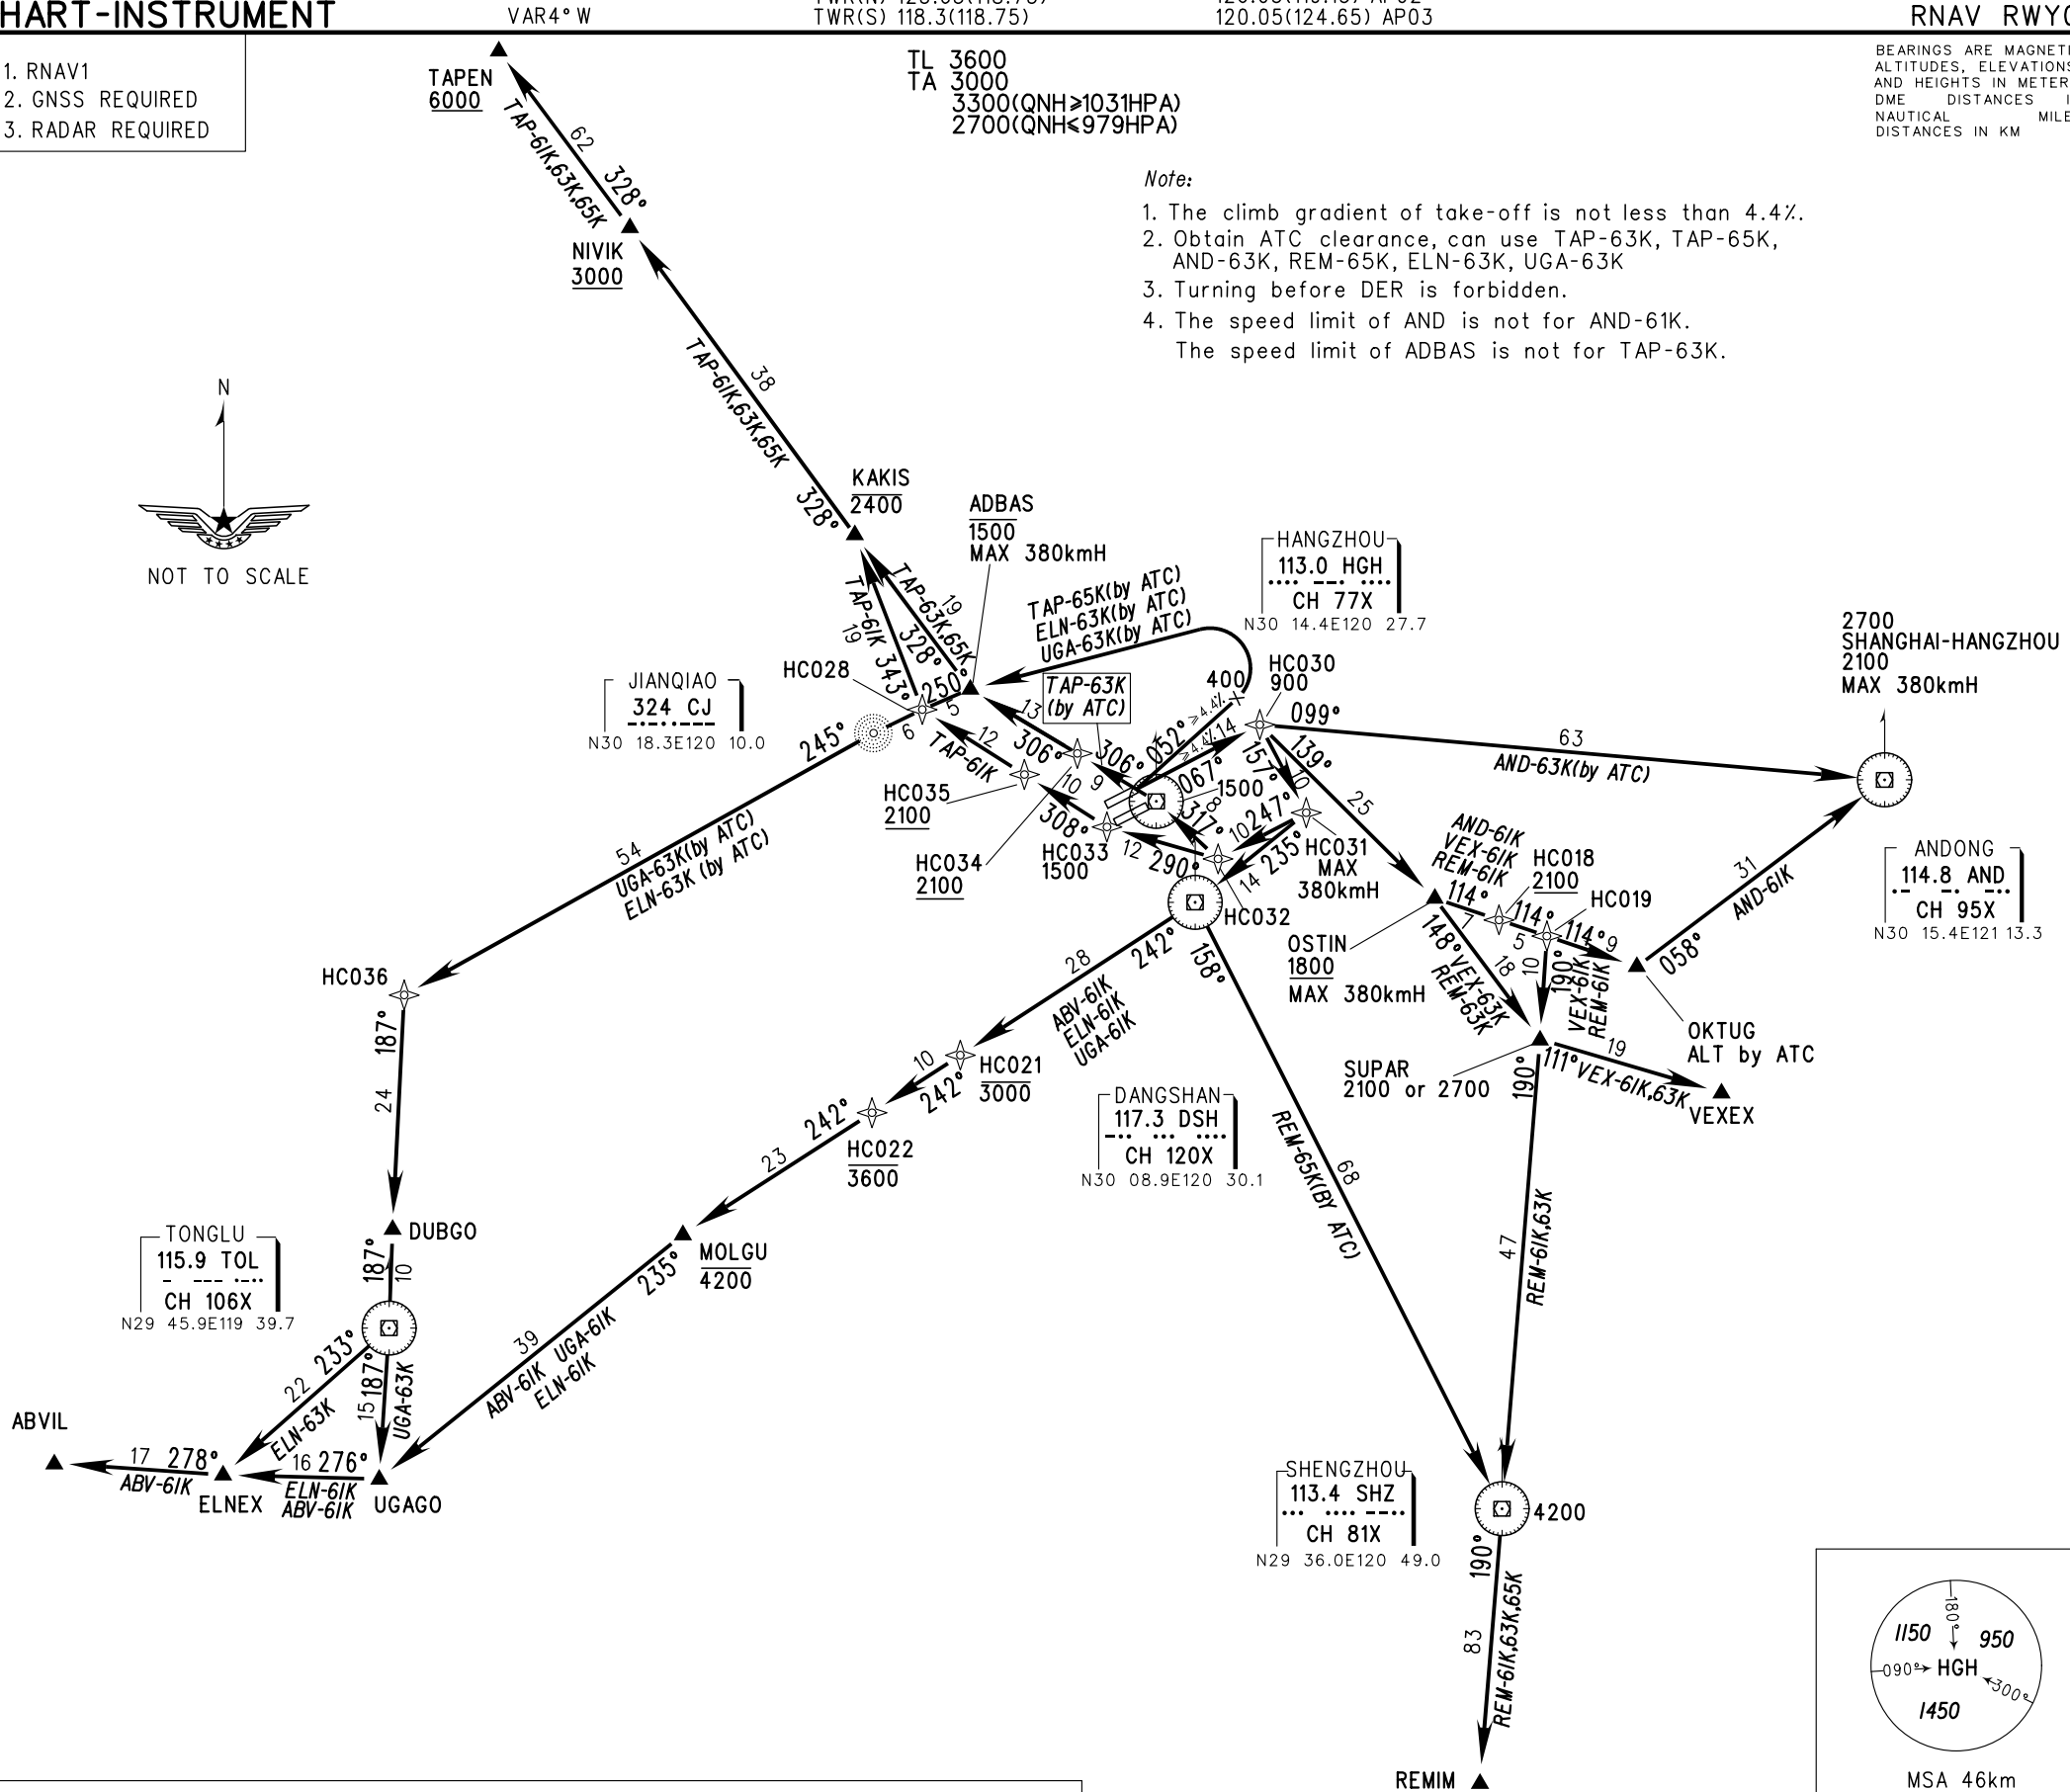

Changes: D-ATIS.