

STANDARD ARRIVAL CHART-INSTRUMENT

VAR5° W


ATIS 127.85
APP 120.45(124.75)
TWR 118.35(123.65)

ZBSJ SHIJIAZHUANG/Zhengding
RNAV RWY33


BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

TL 3600
TA 3000
3300(QNH≥1031HPA)
2700(QNH≤979HPA)


1. RNAV1
2. GNSS REQUIRED
3. RADAR REQUIRED



NOT TO SCALE

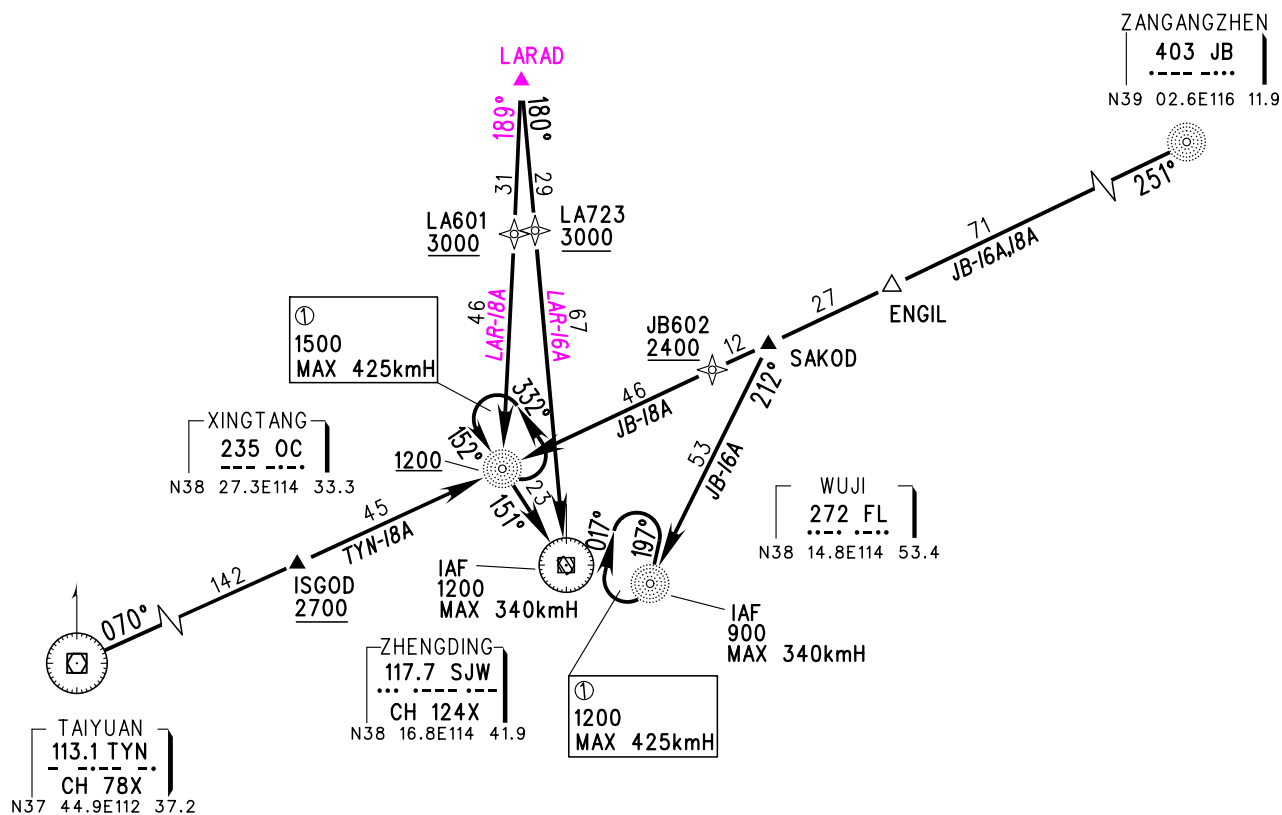

Note: NDB "OC" and "FL" are fly-over points for holding procedure.



Changes: LAR-16A,18A, MSA.