

AERODROME CHART


RWY	Direction	Bearing strength(PCN)	
03	032°	TWYs A10, D3, D5, T1&T2&T3(apron 3):	77/R/B/W/T
		TWYs A2,A4,A8:	73/F/B/X/T
21	212°	TWYs A, A1, A3, A7, A9, T1&T2(apron 2):	72/R/B/W/T
		RWY, TWYs A5, A6, D1, D2, T1&T2(apron 1):	66/R/B/W/T

ATIS 126.65
 TWR 130.0(118.35)
 GND 121.6
 EMG 121.5

ZLIC YINCHUAN/Hedong

N38°19.2'E106°23.6' ELEV 1141m


BEARINGS ARE MAGNETIC
 ALTITUDES, DISTANCES,
 ELEVATIONS AND HEIGHTS
 IN METERS

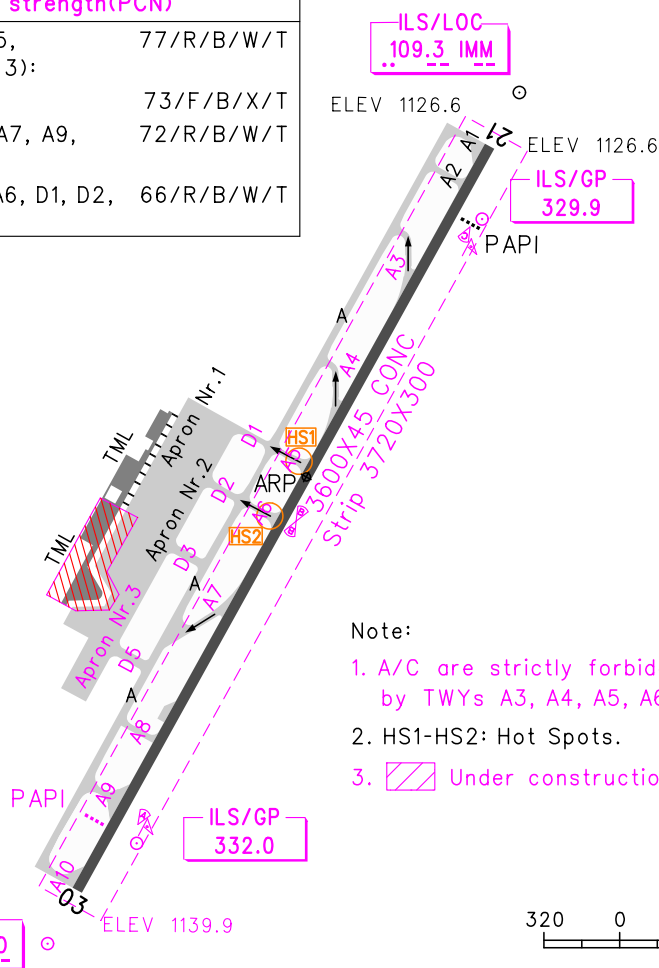

Note:

1. A/C are strictly forbidden to enter RWY by TWYs A3, A4, A5, A6, A7 without ATC clearance.
2. HS1-HS2: Hot Spots.
3. Under construction

320 0 320 640 960m

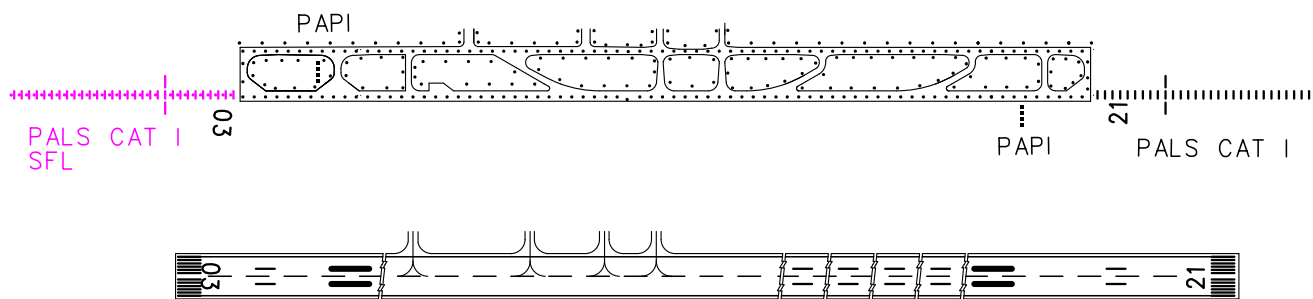

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(M)					LIGHTS	
RWY	ACFT Type		REDL	NIL(Day only)	RWY03	RWY21
03/21	2 TURB ENG	CAT A.B.C	RVR 400 VIS 800	RVR 500 VIS 800	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I PAPI REDL RCLL
	or 3&4 ENG	CAT D				
	Other		VIS 1600			

Changes: PCN, ILS/LOC&GP, windsock, RVR, new TWYs&apron, lights.