




D-ATIS 127.45 (ARR) 128.65 (DEP)
TWR(N) 124.3 (118.15) TWR(S) 130.45 (118.15)
GND(N) 121.8 (124.3) GND(S) 121.65 (130.45)
121.6 for delivery (DCL AVBL)

ZLXY XI'AN/Xianyang

N34° 26.7'E 108° 45.0' ELEV 479m

AERODROME CHART

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

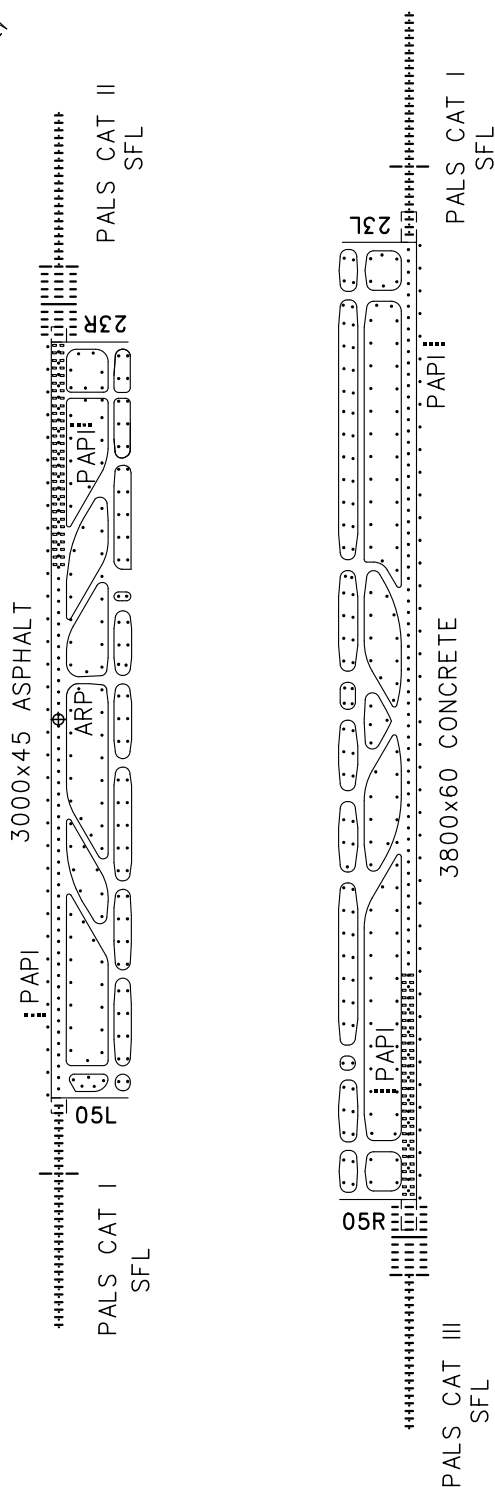

Note: RWY 05R/23L marking is similar to RWY 05L/23R.

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS									
ACFT Type		RWY 05L/23R, 05R/23L		RWY 05L/23R, 05R/23L		RWY05L		RWY23R		RWY05R		RWY23L	
		Low visibility procedure in force		REDL		NIL(Day only)		PALS CAT I		PALS CAT II		PALS CAT III	
		REDL,RCLL		RVR400 VIS800		RVR500 VIS800		PAPI		PAPI		PAPI	
		RVR200		RVR250				REDL		REDL		REDL	
2 TURB ENG		CAT A,B,C						RCLL		RCLL		RCLL	
or 3&4 ENG		CAT D						SFL		TDZL		SFL	
Other				VIS1600				SFL		SFL		SFL	