
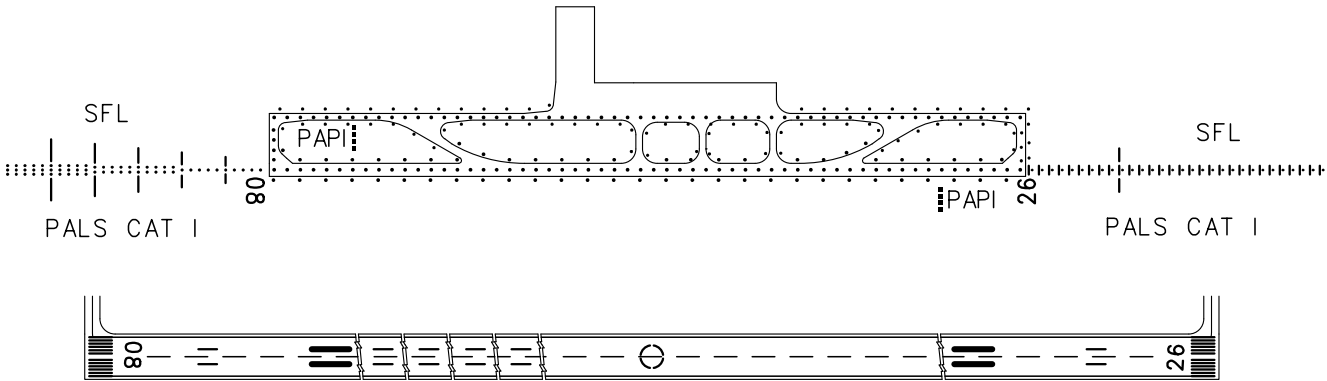


RWY	Direction	Bearing strength(PCN)
08	079°	TWY A, B, J, stands Nr.11-Nr.19: 60/R/B/W/T RWY, TWY, APRON: 56/R/B/W/T
26	259°	

BEARINGS ARE MAGNETIC  
ALTITUDES, DISTANCES,  
ELEVATIONS AND HEIGHTS  
IN METERS

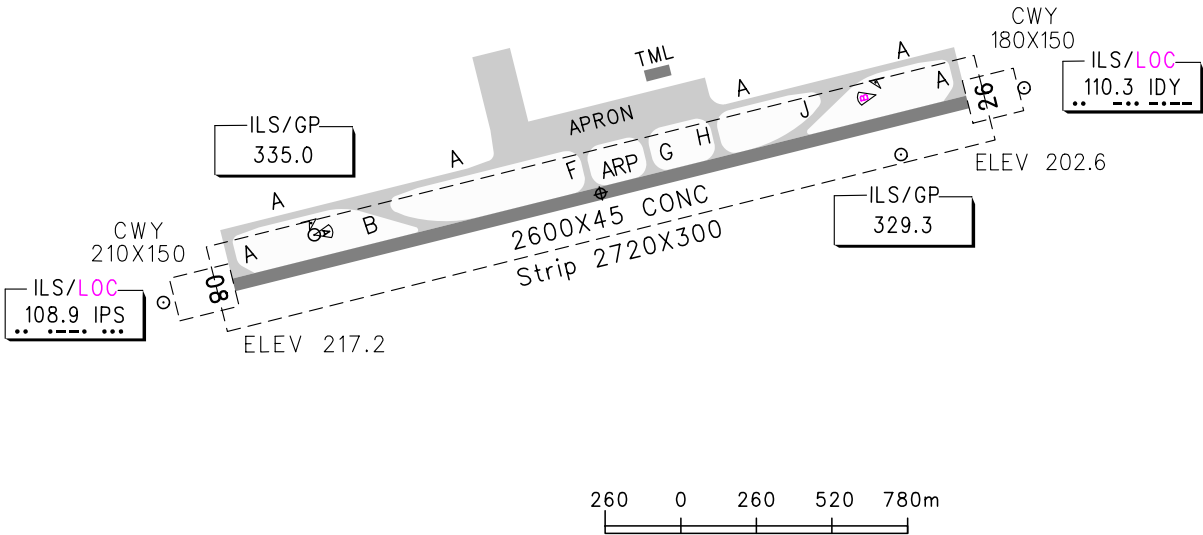

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY08	RWY26
08/ 26	2 TURB ENG OR 3&4 ENG	RVR400	RVR500	PALS CAT I SFL PAPI RCLL REDL	PALS CAT I SFL PAPI RCLL REDL
	Other	VIS1600			

Note: RWY08 takeoff climb gradient should not less than 5.3%  
RWY26 takeoff climb gradient should not less than 4.8%

Changes: RVR, ILS/LOC.