

D-ATIS 131.45
 ATIS 127.45(departure) 126.85(arrival)
 Zhuhai APP(R) TM01 120.35(127.95)
 TM02 124.25(126.0)
 TM03 123.85(126.0)
 TM04 124.75(127.95)

TWR 130.35(118.05)(E)
 118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan
 RNAV RWY15


STANDARD DEPARTURE CHART-INSTRUMENT

VAR2°W

BEARINGS ARE MAGNETIC
 ALTITUDES, ELEVATIONS
 AND HEIGHTS IN METERS
 DME DISTANCES IN
 NAUTICAL MILES
 DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. Basic RNP1
4. GNSS or DME/DME/IRU REQUIRED

TL 3600(QNH<980HPA)
 3300(QNH>980HPA)
 TA 2700

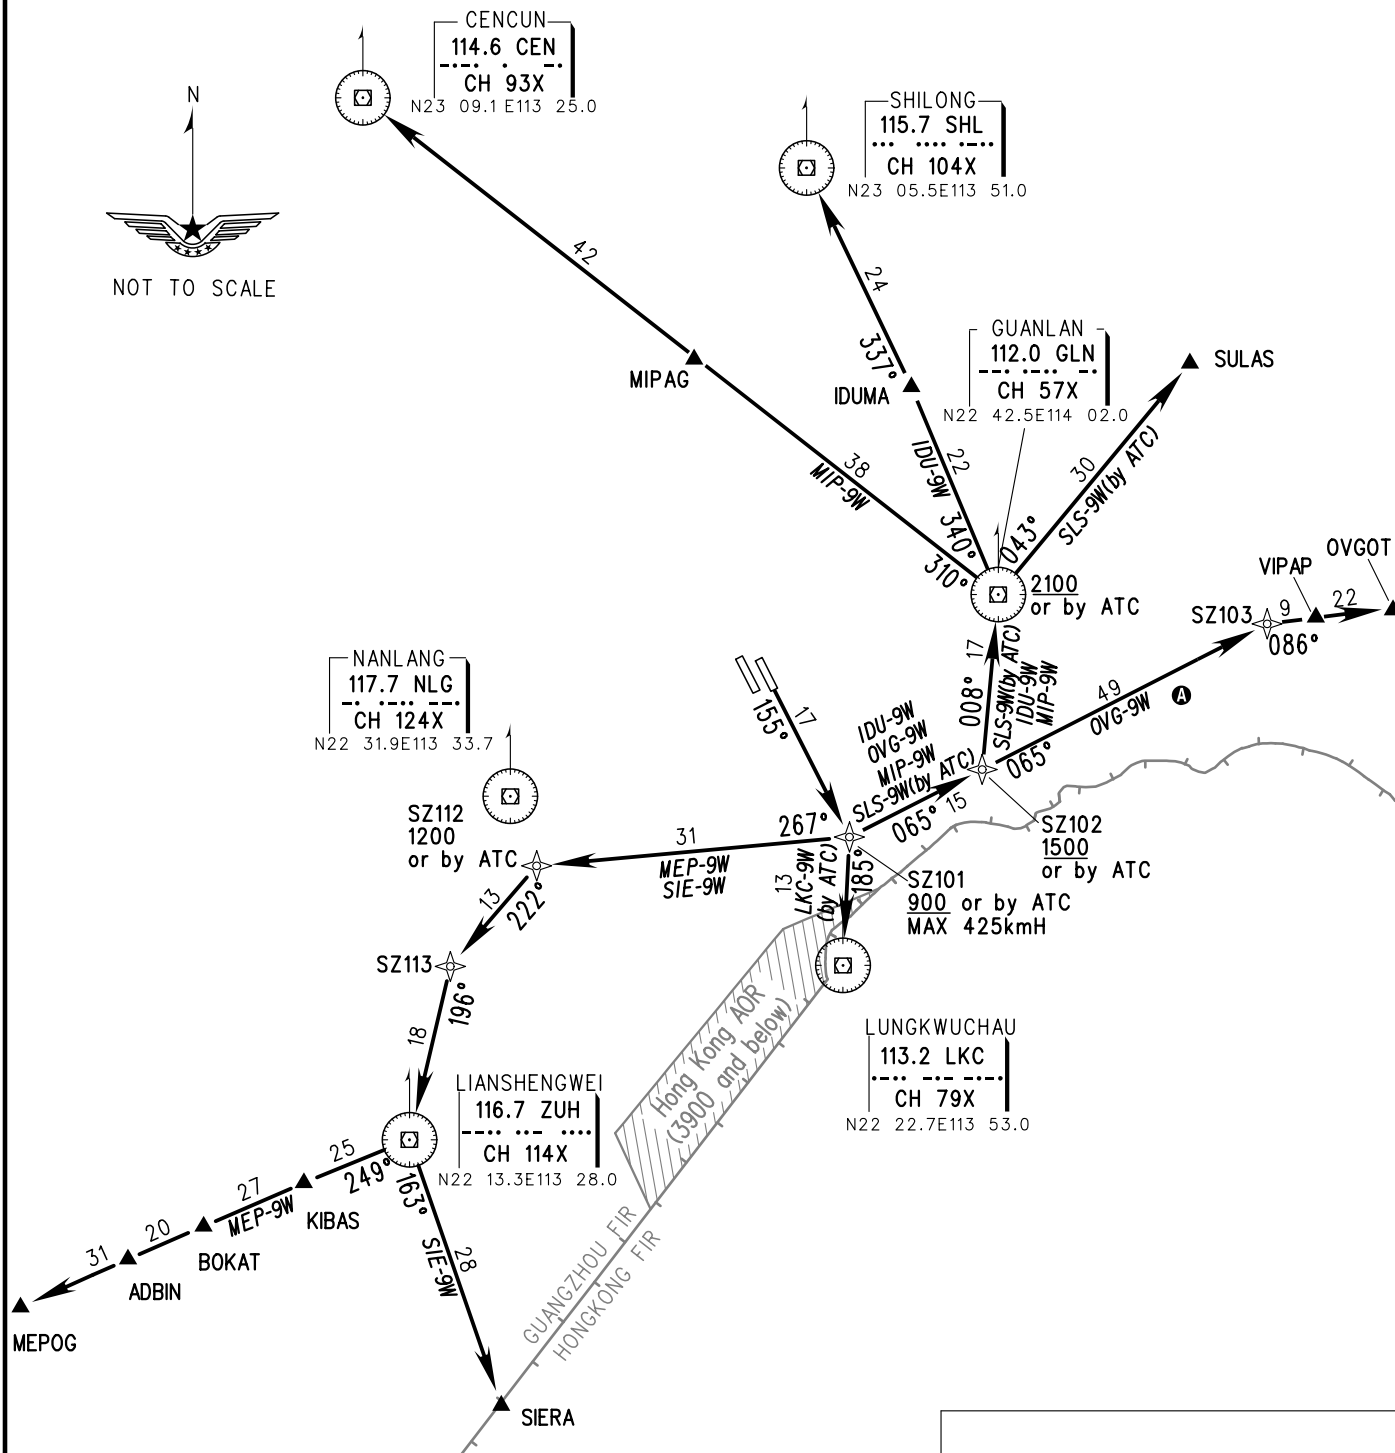

Note: ① Deviation to south of R065°SHK is forbidden for OVG-9W, IDU-9W, SLS-9W, MIP-9W.
 ② Departure turn MAX IAS 425kmH.
 ③ When two RWYs used for independent departure, MIP-9W, SIE-9W need ATC clearance.
 Ⓐ Deviation to southeast is forbidden.

Changes: Procedure.

