## GEN 2.3 航图符号 CHART SYMBOLS

# 1. 航图符号 Aeronautical chart symbols

民用机场 Civil aerodrome	<b>\( \rightarrow \)</b>
民用直升机场 Civil heliport	<b>⊕</b>
城市名/机场名 机场标高(米) City/Aerodrome elevation(M)	BEIJING/Capital 36
国界线 National border	
飞行情报区 Flight information region	<del></del>
飞行情报区(未定界) Provisional flight information region	
管制区 Control area(CTA)	
终端区,进近管制区,塔台管制区域 TMA,APP controlarea or TWR controlarea	
管制区域扇区或机坪通信频率扇区边界 CTA, APP, TWR sector boundary or ramp frequency boundry	იυიυიυ
空中走廊( 标有编号 、宽度) Air corridor with designator and width	<b>⊙</b>
航路(标有航路代号、磁航线角、最低安全高度、距离) Air route with designator,magnetic track, MSA and distance	Distance in km between facilities  Segment distance in km  138  112  276°  091°  Route designator Minimum safe altitude Magnetic track
单向航路 One-way air route	212° 124 H12 2689 →
脱离航线 Diversionary route	
目 视航线 VFR route	
该航路不使用此报告点 Report point unusable at this route	
等待航线(标有航向、出航时间、最低等待高度) Holding pattern with heading, outbound time and MHA	270° 090°

报告点 Reporting point	▲ ▲ 强制 Compulsory △ 要求 Non-compulsory
定位点 Fix/Turning point with altitude change	×
VOR, VOR/DME罗盘 Compass-card for VOR, VOR/DME	
VHF 全向信标台 VHF omnidirectional radio range(VOR)	⟨•⟩
测距仪 Distance measuring equipment(DME)	·
全向信标台和测距仪在同一位置 Co-located VOR and DME	
无方向性无线电信标台 Non-directional radio beacon(NDB)	
无线电设施通用符号 General symbol for radio facilities	$\odot$
导航台数据框 NAVAIDS information box	NINGSHAN 116.3 NSH CH 110X Morse code N33 19.1E108 18.7 Channel of DME 402 RQ N33 19.2E108 18.6 NDB frequency and identification
管制区通信频率数据框 CTA information box	Dalian control  123.2 *120.75  6616 08-20  5481 20-08  **11306  Alternate frequency
禁区、危险区、限制区、放油区 Prohibited area, danger area, restricted area or fuel dumping area	
限制空域的编号、限制高度和时间 Prohibited area with number, vertical limits and operation time	ZB R241 (P) Prohibited (R) Restricted (D) Danger (D) Danger (E) Prohibited (R) Restricted (D) Danger (D) Prohibited (E) Restricted (D) Danger (E) Prohibited (E) Restricted (D) Danger (D) Prohibited (E) Restricted (D) Danger (E) Prohibited (E) Restricted (E) Res
区域图范围 Area chart region	[]

等磁差线 Isogonic line	1° W
网格最低安全高度(单位: 10米) Area minimum altitude(in tens of meter)	188
注记编号 Note number	<b>2</b>
城镇 City/town	Nanjing
障碍物( 标有海压高度, 括号内为场压高度) Obstructions with elevation AMSL and AGL in brackets	☆ 180 ☆ (75) ☆ 180 ☆ (75) 无灯光 有灯光 Unlighted Lighted
高度(用于区域导航) Altitude (used for RNAV)	7000 'at or above' Altitude  7000 'at or below' Altitude  7000 'mandatory' Altitude
区域导航飞越点 RNAV fly-over waypoint(also used for start point and end point of a controlled turn)	❖
区域导航旁切点 RNAV fly-by waypoint	<b>\rightarrow</b>

2. 地理信息符号 Symbols for topographical information

标高点 Spot elevation	• 300
面状水系 Open water	~~~
单线河 Linear drainage	
季节性河流和湖泊 non-perennial stream or lake	
地形等高线和等高值 Contours and contour values	•1150 900 600 300


## 3. 机场平面图和停机位置图符号

## Symbols for aerodrome/heliport chart and aircraft parking chart

机场内直升机停机点 Helicopter alighting area on an aerodrome	H
有铺筑面跑道 Paved runway	
无铺筑面跑道 Unpaved runway	
关闭的跑道、滑行道或其不能使用部分 Closed RWY, TWY or part of them unusable	u/s <i>2011/10</i> 20 <del>XXX</del>
停止道、净空道、长宽及铺筑面性质 Stopway and clearway with dimentions	SWY 60X40ASPH CWY 200X150
升降带 Strip with dimentions	Strip 3200X300
跑道等待位置标志 Runway holding position marking	A类 Pattern A <u></u> B类 Pattern B <del></del>
中间等待位置 Intermediate holding position	
机动区冲突多发地带 Hot Spot Note: Hot Spot location to be circled.	
跑到入口内移 Displaced threshold	
停机坪和滑行道 Apron and taxiway	
滑行道 Taxiway	A
停机位置编号和滑行路线 Stands with identifiers and taxilines	000000000000000000000000000000000000000
机场基准点 Aerodrome reference point (ARP)	Φ
跑道视程观测点 Runway visual range observation site	( <del>)</del>
VOR 检查点 VOR checking point	<b>←</b> ⊖

障碍物灯 Obstacle light	がら
航空地面灯 Aeronautical ground light	*
测风仪 Surface wind sensors	A
着陆方向标 Landing direction indicator	┤├ 有灯光 Lighted ├ 无灯光 Unlighted
跑道灯和滑行道灯 Runway and taxiway light	
进近灯 Approach light	PALS CAT II
	SALS ···································
接地地带灯 Touchdown zone light	***************************************
精密进近航道指示器 Precision approach path indicator(PAPI)	į.
瞄准点标志 Aiming point marking	=
跑道中心标志 RWY center marking	0
跑道入口 标志 RWY threshold marking	
接地地带标志 Touchdown zone marking	or <b>=</b>
停止排灯 Stop bar	
ATC频率边界 ATC frequency boundary	ისისისისის

#### 4. 进场图、离场图和进近图符号 Additional symbols for STAR, SID and IAC

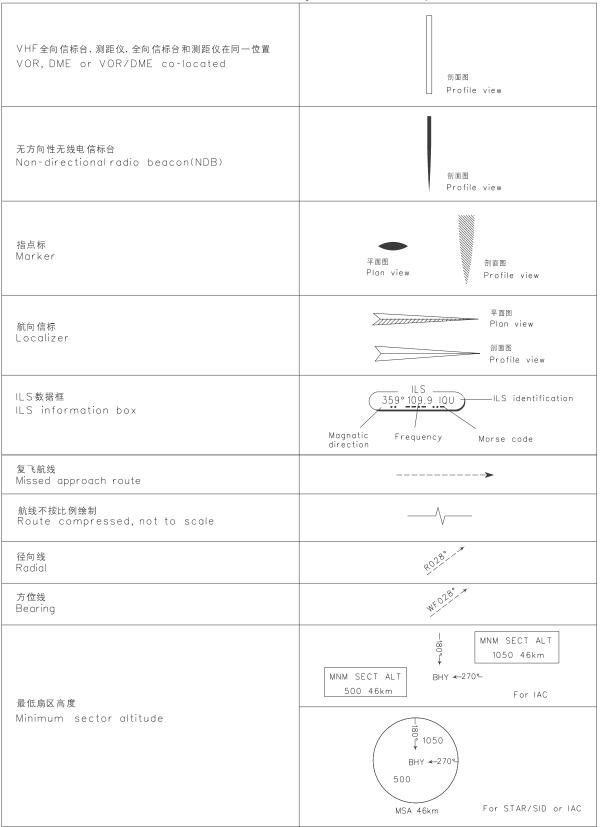

#### 5. 机场障碍物图符号 Symbols for aerodrome obstacle chart

5.机场障碍物图付号 Symbols for aerodron	ne obstacle chart
建筑物 Building	
铁路 Railroad	
天线杆 Antenna pole	$\odot$
铁丝网 Wire netting	xx
电话线 Telephone line	—т—т—т—
输电线 Power transmission line	~T~T~T~T~
城墙 Walls	
树 Trees	*
悬崖 Bluff	wine
Ш Mountain	<b>A</b>
剖面图上的障碍物及障碍物编号 Obstruction with number in the profile-view	•
远方障碍物数据 Isolated distant significant obstacle	⑨ 山 标高 408.2
穿透障碍物限制面地形 Limits of penetration of terrain	平面图 割面图 Plan view Profile view