


N18° 18.1'E109° 24.8'

RWY	Direction	Bearing strength(PCN)	
08	083°	Apron(stands Nr.1-10): Bussiness apron	91/R/B/W/T
		(stands Nr.301-309, 301L, 301R): Apron(stands Nr.12-46),	85/R/B/W/T
		RWY,TWY D1,D2,E1,E2,E3,F2,H,J:	80/R/B/W/T
26	263°	TWY B,E:	79/R/B/W/T
		TWY C,D:	78/R/B/W/T
		TWY F,F1:	77/R/B/W/T
		TWY A:	75/R/B/W/T



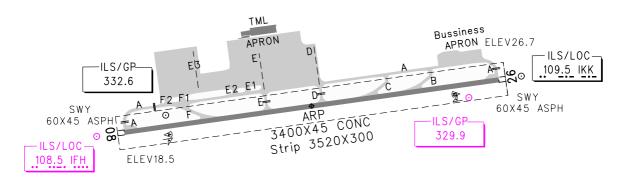



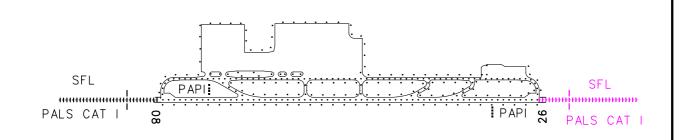



	TAKE-OFF MIN	NIMA(WITH RELIABLE	LIGHTS					
RWY	ACFT Type	REDL	NIL(Day only)	DWYOO	RWY26			
08 -	2 TURB ENG or 3&4 ENG	RVR400	RVR500	RWY08 PALS CAT I	PALS CAT I			
	Other	VIS16	00	SFL PAPI	SFL PAPI			
26	CEILING 300/	VIS5000.	REDL RCLL	REDL RCLL				
Changes: LIGHTS, TAKE-OFF MINIMA.								